

RoHS

Materials

Pin (outer sleeve) :Brass,
Clip(contact 4/6 finger) :Beryllium copper,heat treated
Plating(outer sleeve) :
Tin plated : 1.25u"m/50u"nickel,5um/200u"Tin
Gold plated: 1.25u"m/50u"nickel,full gold
Plating clip(contact):
1.25um/50 u"nickel,gold or tin plating
Insulator body(black) : Glass filled thermoplastic polyester UL94V-0 electrical
Current rating : 3 Amps/contact max.
Contact resistance : 10mΩ /contact
Insulation resistance : 1000M Ω Min
Operating voltage : 60 AC/DC

Ordering Information

HC-MF522 28 2 XX S XX 094 01

Insulator Type
Code
2: Dual row

No.of
Pins
2x40Pins




Contact Plating
SN: Tin
G0: Gold Flash
G2: 2U"Gold
G3: 3U"Gold
G4: 5U"Gold
G5: 10U"Gold
S0: Gold Flash/Tin
Standard: G0

Pin
Length
094=9.40mm

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO. HC-MF522282XXSXX09401

TITLE: 2.00x2.8mm Dual Row Machine Female Header
Straight L=9.4

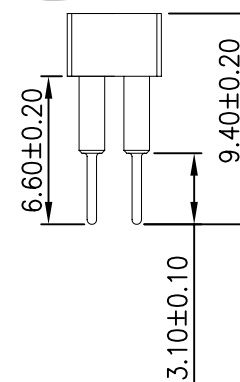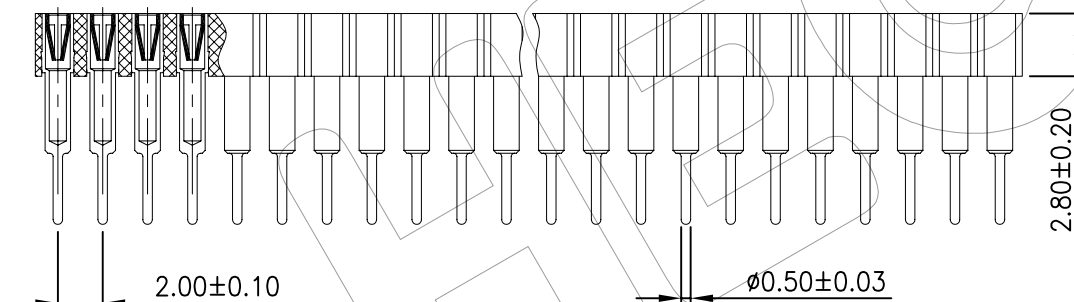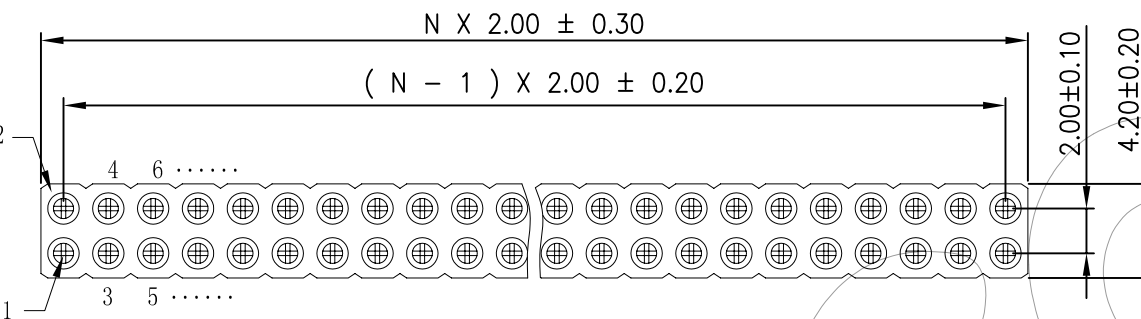

OPERATION

X.X ± 0.30

X.XX ± 0.20

X.XXX ± 0.10

Angle $\pm 3^\circ$

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

ϕ

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9