





RoHS

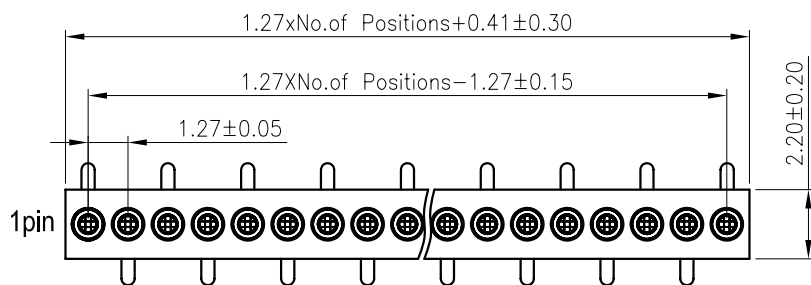


Type 2

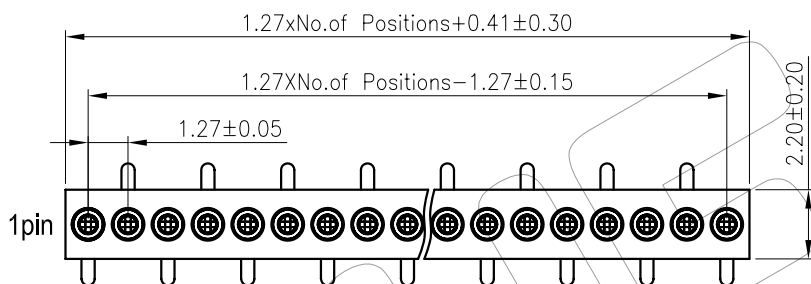

Type 1

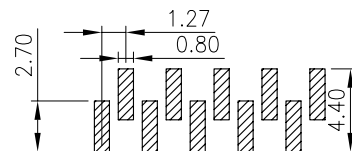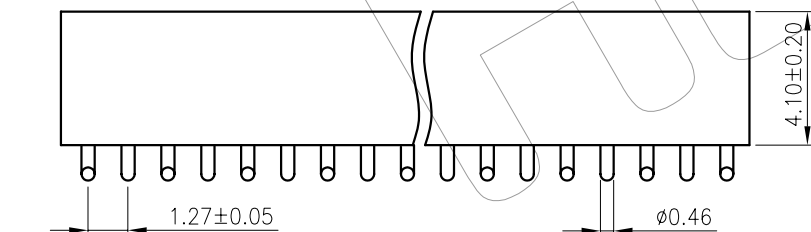

Type 1

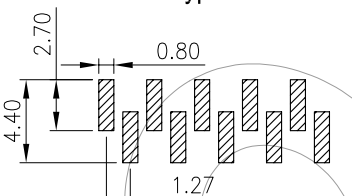

Type 2

Recommended P.C.B Layout

Technical Specs:

Insulator:	Black glass filled polyester PPS
Flammability:	UL 94V-0
Sleeve:	Brass
Contact clip(6 finger):	Beryllium copper(C17300)
Accepted pin:	Ø0.38 to 0.50mm
Forces:	(polished steel gauge Ø0.41mm)
--Insertion	0.5 N typ
--Withdrawal	0.2 N typ
Mechanical life:	min500 cycles
Rated current:	1A
Contact resistance:	max 20mΩ
Dielectric resistance:	500MΩ Min

Ordering Information

HC-MF724 41 1 XX M XX 064 01(2)

Insulator Type
Code
1:Single row
2:Doube row

No.of
Pins
1x40Pins
2x40Pins

Contact Plating
SN:tin
G0:Gold Flash
G2:2U"Gold
G3:3U"Gold
G4:5U"Gold
G5:10U"Gold
S0:Gold Flash/Tin
Standard:G0

Pin
Length
064=6.4mm

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

Φ

HECON

东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-MF724411XXMXX06401(2)

TITLE:

1.27x4.1mm Machine Female Header SMT
L=6.4

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9