





RoHS

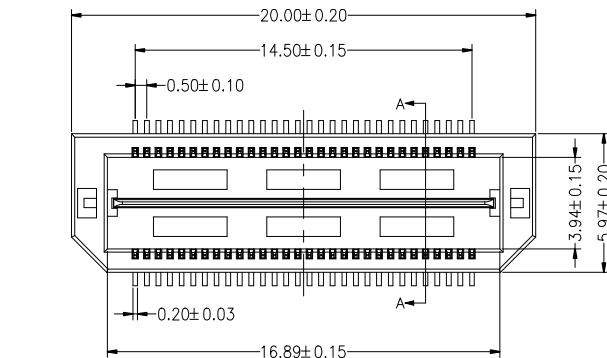



Mating Draw (Ref)

SPECIFICATIONS
PERFORMANCE

信号端子 Current Rating: 2A
电源端子 Current Rating: 25A
Insulation Resistance: 500MΩ
Withstang Volt: 175V AC/minute
Opratng Temperature: -55℃ to +125℃
Material
Contact: Phosphor Bronze Gold-Plated
Housing: LCP
Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 10 seconds)

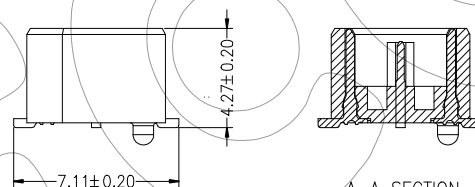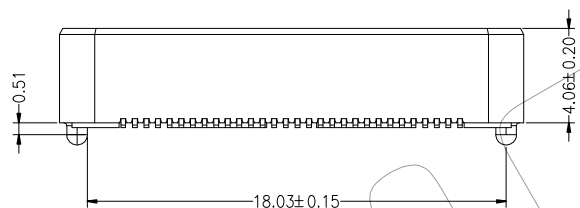

A-A SECTION

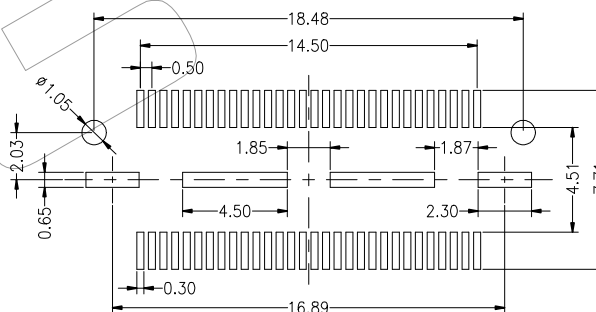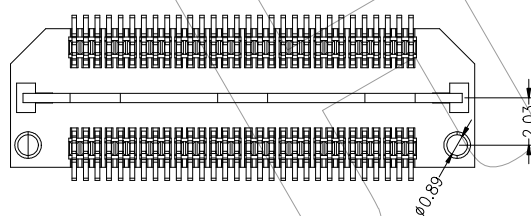

P.C.B Layout

Ordering Information

HC-BTB50 F 060 040 XX F R 01
F=Female No.of pins 20P~100P Plastic Hight 040=4.06mm Contact Plating G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold S0:1.5U" Gold/Tin S1:3U" Gold/Tin Insulator Material Option F=BK-LCP Packing T:Tube R:Reel

OPERATION

X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3°
DIM TOL

DRAW

CHECK

APPROVE

Lu jin ying

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.



HECON

东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-BTB50-F060040XXFR01

TITLE:

0.5mm BTB 60Pin H4.06 Female

A0

2023.05.19

NEW DRAWING

REV

DATE

MODIFICATION DESCRIPTION

CHANGE