
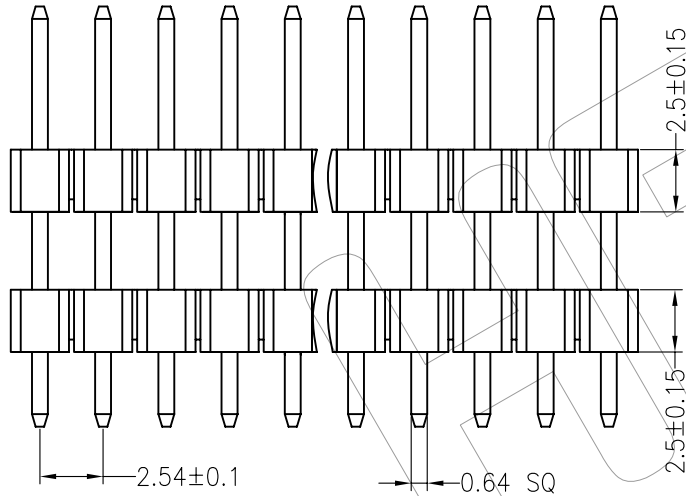



	1	2	3	4	5	6	7	8	9																																																																									
G	RoHS																																																																																	
F							SPECIFICATIONS Rated Current:3.0AMP Contact Resistance:20mΩ Max Withstand Voltage:1000V AC/DC Insulation Resistance:1000MΩ Min Operation Temperature:-40°c to +105°c Contact Material:Brass Contact Plating:Au Over Ni Insulator Material:Polyester(UL94V-0) Standard: PA6T Max.Processing Temp: 230°C for 30-60 seconds (260°C for 10 seconds)																																																																											
E																																																																																		
D																																																																																		
C	<table border="1"><thead><tr><th colspan="5">Dimension antitheses list</th></tr><tr><th>ITEM</th><th>PA</th><th>PB</th><th>PC</th><th>L</th></tr></thead><tbody><tr><td>Standard</td><td>6.00</td><td>5.00</td><td>3.00</td><td>14.0</td></tr><tr><td>Alternate</td><td></td><td></td><td></td><td></td></tr></tbody></table>				Dimension antitheses list					ITEM	PA	PB	PC	L	Standard	6.00	5.00	3.00	14.0	Alternate					Ordering Information HC-PH425 22 XX X N XX S XXX XOX(1,2) No.of Pins Per Row 2x40 4--80 Insulator Material Option A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA46 E=BK-PA9T F=BK-LCP Contact Plating G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin Pin Length Packing 0=PE Bag A=Tray T=Tube																																																									
Dimension antitheses list																																																																																		
ITEM	PA	PB	PC	L																																																																														
Standard	6.00	5.00	3.00	14.0																																																																														
Alternate																																																																																		
B																																																																																		
A	<table><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2">OPERATION</td><td rowspan="2">DRAW</td><td rowspan="2">Ayang</td><td rowspan="2">SCALE</td><td rowspan="2">FIT</td><td colspan="2" rowspan="2">HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td>X.X</td><td>±0.30</td><td></td><td></td><td>UNIT</td><td>mm</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td>X.XX</td><td>±0.20</td><td>CHECK</td><td></td><td></td><td>SIZE</td><td>A4</td><td rowspan="2">PART NO.</td><td rowspan="2">HC-PH42522XXXXXXSXXXOX(1,2)</td></tr><tr><td colspan="2">A0</td><td colspan="2">NEW DRAWING</td><td>X.XXX</td><td>±0.10</td><td></td><td></td><td></td><td>SHEET</td><td>1/1</td><td>TITLE:</td><td>2.54mm H2.5x2 Dual Row Straight Pin Header</td></tr><tr><td>REV</td><td>DATE</td><td colspan="3">MODIFICATION DESCRIPTION</td><td>CHANGE</td><td>Angle ±3'</td><td>APPROVE</td><td></td><td>PROJ.</td><td></td><td colspan="2"></td></tr><tr><td>1</td><td></td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>9</td><td colspan="2"></td></tr></table>													OPERATION		DRAW	Ayang	SCALE	FIT	HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD						X.X	±0.30			UNIT	mm					X.XX	±0.20	CHECK			SIZE	A4	PART NO.	HC-PH42522XXXXXXSXXXOX(1,2)	A0		NEW DRAWING		X.XXX	±0.10				SHEET	1/1	TITLE:	2.54mm H2.5x2 Dual Row Straight Pin Header	REV	DATE	MODIFICATION DESCRIPTION			CHANGE	Angle ±3'	APPROVE		PROJ.				1		2	3	4	5	6	7	8	9		
				OPERATION		DRAW	Ayang	SCALE	FIT	HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD																																																																								
				X.X	±0.30									UNIT	mm																																																																			
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	HC-PH42522XXXXXXSXXXOX(1,2)																																																																						
A0		NEW DRAWING		X.XXX	±0.10				SHEET	1/1			TITLE:	2.54mm H2.5x2 Dual Row Straight Pin Header																																																																				
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	Angle ±3'	APPROVE		PROJ.																																																																									
1		2	3	4	5	6	7	8	9																																																																									

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

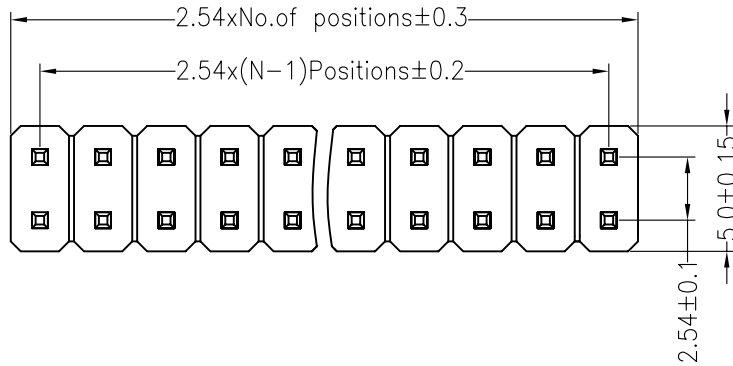

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	6.00	5.00	3.00	14.0
Alternate				

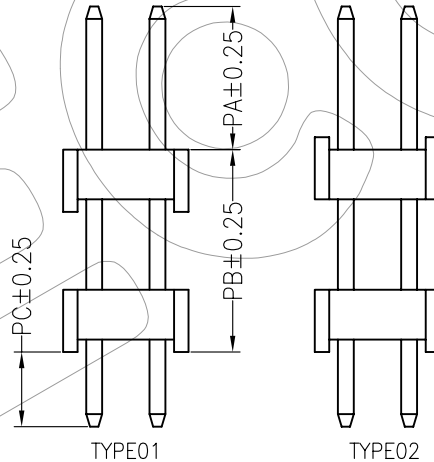

HC-PH425 22 XX X N XX S XXX X0X(1,2)

No. of Pins	Insulator Material	Contact	Plating	Pin Length	Packing
Per Row	Option	G0:Gold	Flash		0=PE Bag
2x40	A=BK-PBT	G1:3U" Gold			A=Tray
4--80	B=BK-PA66	G2:5U" Gold			T=Tube
	C=BK-PA6T	G3:10U" Gold			
	D=BK-PA46	G4:15U" Gold			
	E=BK-PA9T	G5:30U" Gold			
	F=BK-LCP	S0:Gold	Flash/Tin		
		SN:Tin			

				OPERATION		DRAW	Ayang		SCALE	FIT	HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	HC-PH42522XXXXXXSXXXXOX(1,2)
				X.XXX	±0.10				SHEET	1/1		
A0		NEW DRAWING		Angle	±3'	APPROVE			PROJ.		TITLE:	2.54mm H2.5x2 Dual Row Straight Pin Header
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							