
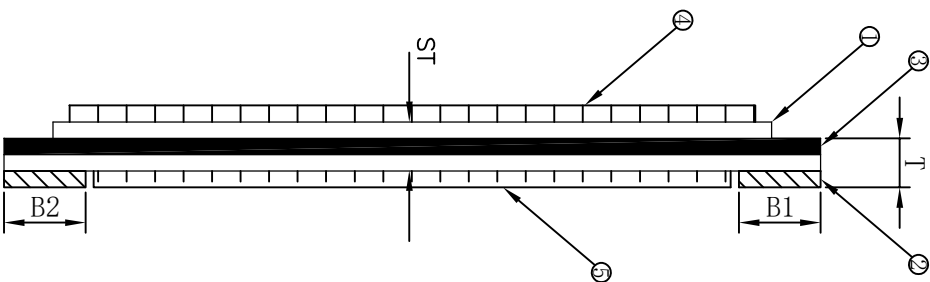


A

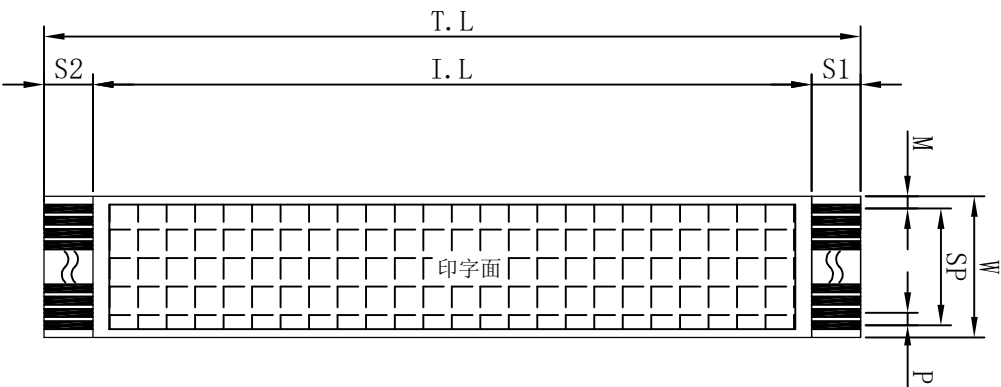


STRUCTURE			NO	ITEM NAME	SPECIFICATION	REMARK
1			INSULATION		印字UL20706 60um 客供	105C,60V
			(绝缘层)		空白60um	
2			P/TAPE (补强板)		AWM 20706 105C 60V VW-1	
			THICKNESS		205um	
3			CONDUCTOR (镀锡线)		THICKNESS	0.05
			WIDTH		0.3	±0.005
			PLATED		Sn(40u")	±0.03
			PLATED			MIN
4			铝箱		W15*L18*T0.07	银色
5			铝箱		W15*L8*T0.07	银色

DIMENSION			PITCH (间距)	P	0.5	±0.05
			SPAN (全间距)	SP	14.5	±0.08
			WIDTH(总宽度)	W	15.5	±0.08
			MARGIN (边距)	M	0.5	±0.08
			INSERT THICKNESS (插入厚度)	M1		
			SURFACE THICKNESS (线身厚度)	T	0.31	±0.03
			PROTECTOR LENGTH (补强板长度)	ST	0.17	±0.03
			STRIP LENGTH (金手指长度)	B1	10.0	±1.0
			INSULATION LENGTH (绝缘层长度)	B2	10.0	±1.0
			TOTAL LENGTH (产品总长度)	S1	5.0	±0.5
				S2	5.0	±0.5
				I.L	20.0	±1.0
				T.L	30.0	±1.0
			NO of PIN(导体数量)		30P	

NOTES:

- 成品之两端内外CB为0-0.5mm
-



HECON P/N
HC-FFC-05-30-XXX-A-01

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO., LTD

TITLE		0.5*30P*30-5/5/10/10 A	
APPROVED		CUSTOMER	
CHECKED		REV	
DRAWN		SHEET	
SER		1/1	
DESCRIPTION		SIZE	
CHK		A4	
DATE		SHEET	