



AFL88

IP65 IK08

CE ErP




W Efficiency:90Lm/W

30.000h Driver Life


IK08

IP65


AFL88 not only sees better heat dissipation, but also include a plug and longer wire. You can actually install yourself and point to the desired direction with arm bracket.

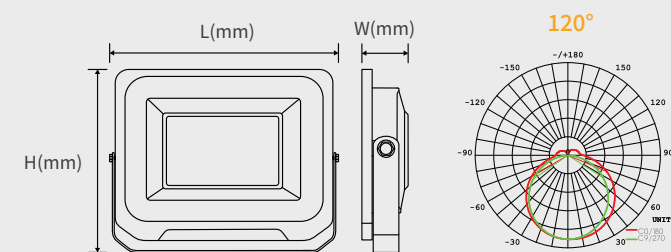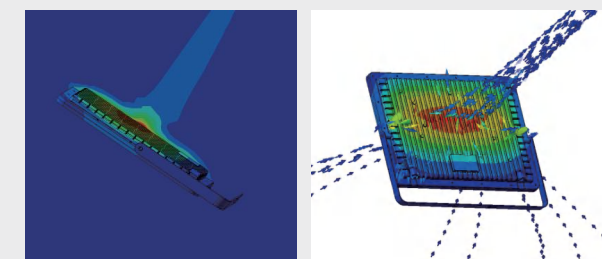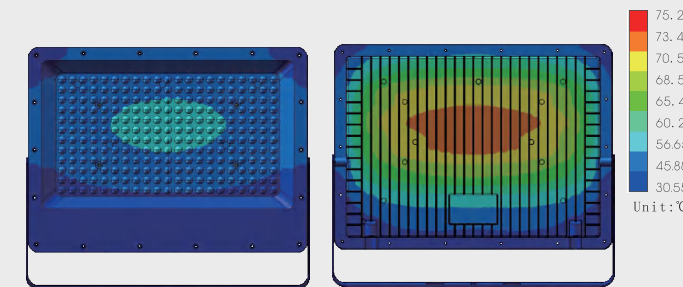


Floor Installation




Ceiling Installation



Suction Installation

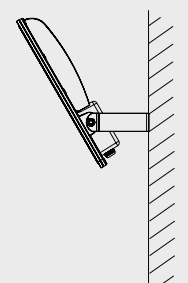

Post Installation

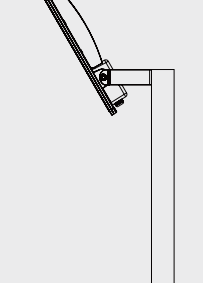

Led Module

LED Chip Brand:	Sanan / Epistar
LED Chip Type:	SMD2835
Luminous Efficacy:	90LM/W
Color Rendering Index (RA):	> 70 / 80 / 90
Color Temperature:	2200K-6500K
Beam Angle:	120°
Number Of Lens:	A:12 Pcs / B:24 Pcs / C:36 Pcs / D:72 Pcs / E:84 Pcs / F:144 Pcs / G:192 Pcs / H:240 Pcs / I:360 Pcs
Life Time:	30000 Hours

Electrical Parameters

Power A:	10W
Power B:	20W
Power C:	30W
Power D:	50W
Power E:	70W
Power F:	100W
Power G:	150W
Power H:	200W
Power I:	300W
Voltage:	AC100-240V / AC220-240V
Frequency:	50/60Hz
Electrical Security Class :	Class I
Work Temperature:	(-30 °C to 50 °C)
IP Grade:	IP65
IK Grade:	IK08

Driver

Type:	Linear / DOB
Power Factor:	> 0.90
THD:	< 15%

Materials and Properties

Material Of Shell:	Aluminum (ADC12) +Optical glass
Size 10W (mm) :	90*28*68
Size 20W (mm) :	115*32*90
Size 30W (mm):	150*32*112
Size 50W (mm) :	195*32*140
Size 70W (mm):	225*35*165
Size 100W (mm) :	260*37*195
Size 150W (mm):	305*37*220
Size 200W (mm) :	340*40*250
Size 300W (mm):	402*40*290