

ALL IN ONE SSL023

IP
66

IK
09



**Innovation
technology that
means 100%
energy savings in
any installation**

Description

Range of intelligent and autonomous solar LED luminaires. The luminaire integrates photovoltaic panel, high capacity Li-ion battery, charge controller and LED optical group. LED optics. In addition, an infrared presence sensor is included to increase the autonomy autonomy by reducing the illumination level following a dimming curve, when no presence is detected. Automatic switch-on when no light is detected.

Easy mounting on any standard column, with a variable panel inclination in road models for a greater variable inclination of the panel in road models for a better use of sunlight.

Advantages

- 100% autonomous solar LED luminaire.
- High efficiency of the LED array.
- Integration of all components in a single product.
- Maximum respect for the respect for the environment.
- Economical, efficient and intelligent.
- Very easy installation with adaptation.



Optical characteristics

LED chip	Lumileds/Epistar
System efficiency	160LM/W
CRI	>70
L70 B10 at 25°C	100.000h
Operating temperature	-20°C a +60°C
Type of optics	Type II Type III
Optical material	PC

Mechanical characteristics


Housing	Aluminum
Fixing	Ø60mm
Angle of inclination	Adjustable (-15° to 105°)
LED Module	Interchangeable
Finishing color	7047/9004
IP	IP65/66
IK	IK08/09

Electrical characteristics

Battery type	Li-ion
Charging time	6-8 hours (Strong sunshine)
Discharge time	10-30 hours (With detection)
Panel life	25 years
Charge/discharge protection	Yes
Method of detection	Infrared/Radar
ON/OFF switch	Integrated in luminaire

*The nominal charging time is calculated for a favorable solar irradiance of 1000W/m2. This value varies depending on weather conditions.

Mounting heights

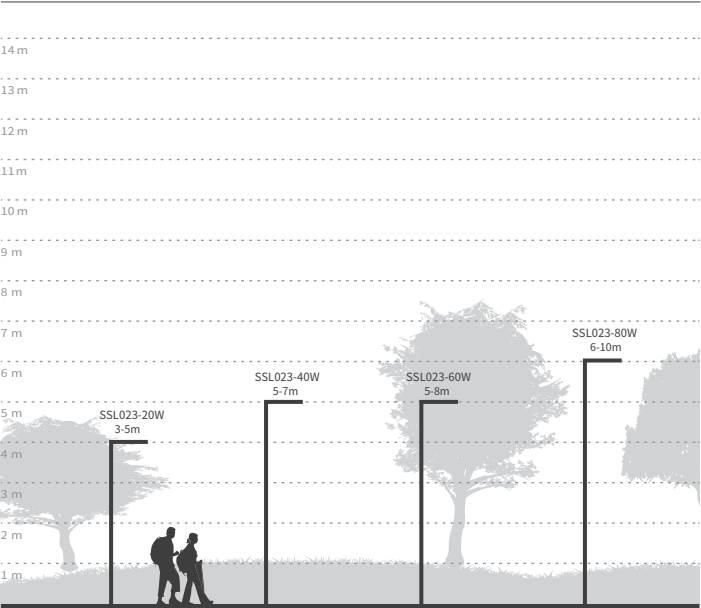

Orientation for maximum use of solar radiation.




Integrated LED group


Item No.	Solar Panel	Battery	LED	Mounting height	Space Between Light
SSL023-20W	6V 35W	3.2V 35AH	SMD 3030 64PCS	3-5M	10-20M
SSL023-40W	6V 45W	3.2V 45AH	SMD 3030 128PCS	5-7M	10-25M
SSL023-60W	18V 65W	12.8V 40AH	SMD 3030 192PCS	5-8M	10-25M
SSL023-80W	18V 85W	12.8V 65AH	SMD 3030 256PCS	6-10M	20-30M

Dimensiones

Panel	Length (mm)	Width (mm)	Height (mm)	Package weight (kg)
SSL023-20W	571	413	160	13
SSL023-40W	700	413	160	14.5
SSL023-60W	957	413	160	18
SSL023-80W	1215	413	160	25

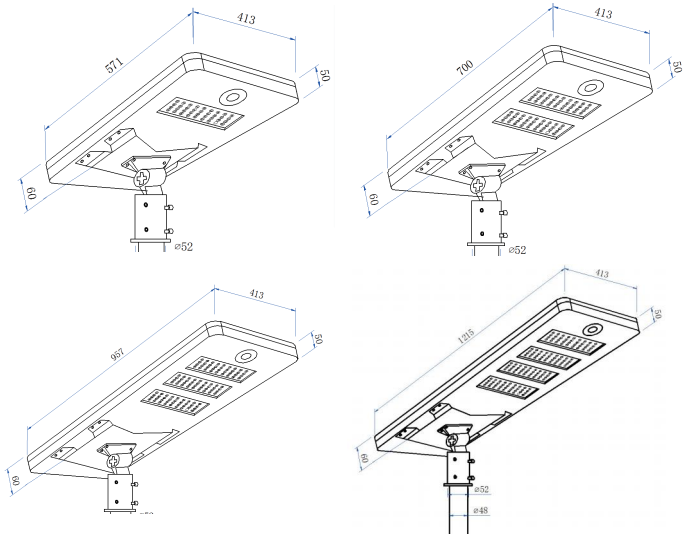

Examples of photometric curves

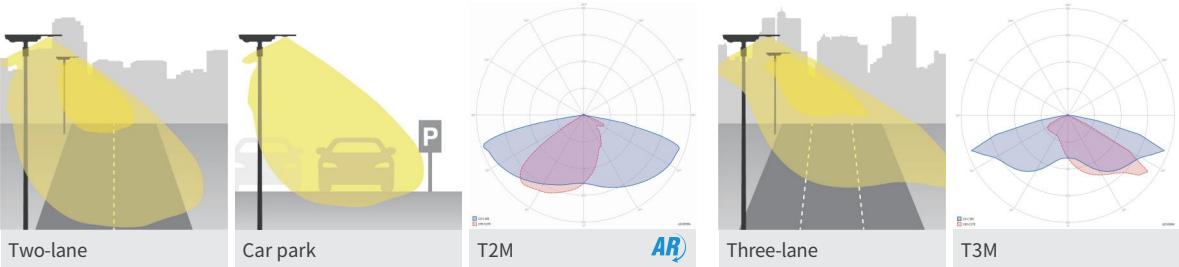

The application for the photometric curves is indicative. The optics of this product can be used in multiple applications.

Optics

