


L2KQ802LFA2-PT

4K AI Smart Hybrid Light POE Network Metal Bullet Camera(Audio,Voice Broadcast,TF Card Slot)

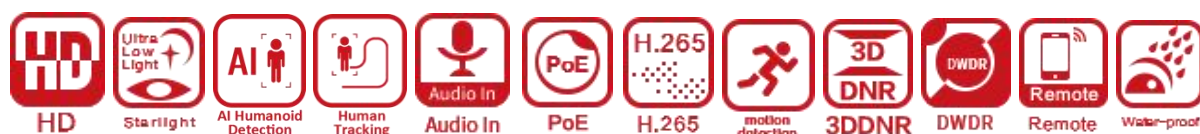

Model Number	L2KQ802LFA2-PT
Camera	
Image Sensor	1/2.8" SONY color CMOS
Min. Illumination	Color: 0.001Lux @F1.2, B/W: 0Lux with IR on
Lens	Special Starlight 4mm
Shutter Time	Auto(1/5 - 1/100000)
Feature	
Light Distance	Full Color Light Distance:10-15m,IR Distance:20-25m
IR LEDs	3pcs Infrared LEDs and Hybrid light core
Day & Night Mode	Dual Light Mode: B/W night vision, when alarm triggered hybrid light is on, and then full color vision
	Infrared Mode: B/W
	Full Color: the LEDs will auto-adjust its brightness according to the varying degrees of light brightness
White Balance	Auto / Manual
AGC	Low/Mid-Low/Mid/Mid-High/High
WDR	128DB Real WDR
DNR	2D/3D DNR

BLC	Support
HLC	Support
Video	
Max. Image Resolution	8MP(3840*2160)@20fps
Video Compression	S265/H265/H264
Frame Rate	Main code stream: 8MP@20fps; 5MP/4MP/2MP@25/30fps; Auxiliary stream: D1/VGA@25/30fps
Video Bit Rate	1024Kbps-24Mbps support self-adjustable as needed
Image Settings	Brightness,contrast,saturation,exposure,upside down,mirror adjustable
Bit Superposition	Support OSD name,time and date information superposition
Web Access	Google Kernel Browser(Plugin Free)
Audio	
Audio Input	Support, built-in microphones
Audio Output	Support, built-in speaker
Voice Broadcast Alarm	Built-in 8 different broadcast options
Audio Compression	G.711/64k
Network	
Network Interface	1*RJ45 10M/100M Ethernet Port
Networking Protocol	TCP/IP,UDP,HTTP,HTTPS,DHCP,RTSP,NTP,PPPOE
ONVIF	ONVIF2.6
APP	Support
PC	Support
System	
Alarm	Motion detection alarm, AI humanoid detection and tracking
Human Detection	It can detect target ≤5 persons at the same time
	Humanoid pixel ≥40X40
	Support specified area detection, default full screen
	Error detection rate 2% or less
	Maximum detection frame rate is 5fps /s
Storage	Support, Max 512G TF Card
Motion Detection	22*18 windows motion detection areas can be setting (sensitivity setting 1-6)
Area Occlusion Alarm	Support
Video Mask	4 windows can be built to mask your private area
Action with Alarm	Voice prompt alarm(Optional broadcast content)
General	
Language Support	CHN(S)/CHN(T)/ENG
POE	IEEE802.3af
Power Supply	DC12V±10% /POE
Power Consumption	Max 6W

Lightning Protection	6KV
Housing	Metal bullet
Weather Proof	IP66
Working Temperature	-30 °C to 85 °C
Working Humidity	10%-95% (Non-condensing)

