




YT-2000


YT-1500

YT-2000

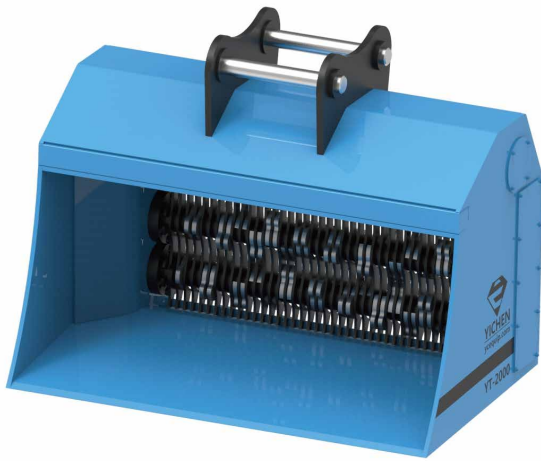

ACCESSORIES

Replaceable roller

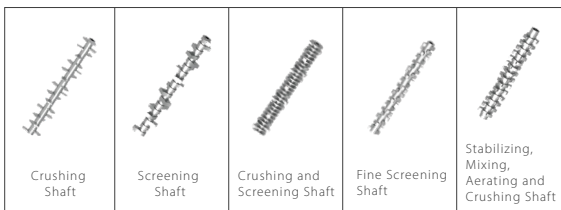

blade

· Single blade · Double knife board · Three knife board

PRODUCT APPLICATIONS

- Treatment of waste, broken bark, broken gypsum board.
- Screening compost and topsoil, sand, soft minerals, separating waste from soil.

Treatment of construction/demolition waste, slag, quarry waste, tiles.

- Treatment of contaminated soil, treatment of soft soil such as sludge and silt.
- Backfill of screened find soil to pipeline project, asphalt recycle.
- Reclamation of farmlands, separation of rock and soil.

PRODUCT PARAMETER (SPECIFICATION)

Excavator	25- 40 ton	Cutting Force	190 kn
Opening Dimensions	1960 MM	Weight	2473 kg
Output Width	1500 MM	Oil Flow	150-300 L/min
Load Capacity	1.6 m ³	Pressure	320 bar
Dimensions	2000x1200x1530 mm		



APPLICATIONS



Recycling



Compost and Earthwork



Landscape construction



Contaminated Soil Treatment



Fine sifting



Coal Processing



Crushing

*The data provided above is not binding, as the manufacturer reserves itself the right to make improvements to its products at any time and with no advance notice.