



YS-15SS

YS-30DS YS-15SS
YS-20DS YS-10SS
YS-20SS YS-05SS



EXCAVATOR

15-25_{ton}


PRODUCT APPLICATIONS

- Building demolition, cutting reinforced concrete, cement pavement, highway construction and maintenance operations.
- Crushing operation after cutting hard rock.
- Excavation of foundation, rock and concrete of basement.
- Underground cable trench cutting operation.
- Quarry excavation operations, rock waste reshaping, cutting and other operations.
- Rocky tunnel excavation, rocky trench excavation and other operations.

PRODUCT PARAMETER (SPECIFICATION)

Max Power Output	120 kW	Output Shaft Speed	0- 500 RPM
Max Flow	250 LPM	Weight	450 kg
Recommended Flow	150- 230 LPM	Saw Blade spec.	Φ 1600- 2200 mm
Max Pressure	320 bar	Applicable Materials	granite, basalt, marble, reinforced concrete
Output Torque	2610 Nm@320bar		

Note: The rock saw can cut aluminum and reinforced concrete by changing different specifications of saw blades.
The rock saw can work with any hydraulic driven mechanical equipment.

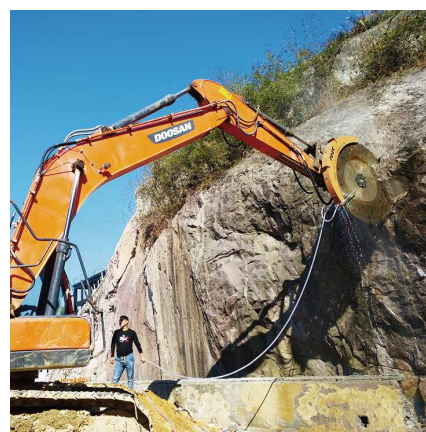

APPLICATIONS



Demolition



Tunneling



Stone Production



Roadworks



Quarries



Trenching



Metal cutting

*The data provided above is not binding, as the manufacturer reserves itself the right to make improvements to its products at any time and with no advance notice.