



Product information

Single-phase high performance filter-DEA4-GD

Description

Small size, guide rail installation, terminal station connection, can be customized, has the characteristics of strong anti-interference, bipolar design of high-performance filtering, and a wide range of uses.

Technical Data

Rated Voltage	115/250VAC
Line Frequency	50/60Hz
Test Voltage	1500VDC(line/line) 2150VAC(line/ground)
Insulation Resistance	>50M Ω @500VDC
Temperature Rise	<30°C
Climatic Category	25/085/21
Housing Material	Nickel-plated iron

Approval & Compliance



Features

Rated current :3A-20A

Guide rail installation, convenient and fast

Terminal station link mode

Can be customized upon request

Applications

Electric power system

Electrical and electronic equipment

Electronic data processing equipment


Office automation and data communication equipment

Industrial applications


Performance Indicator

Standard	High	Very High

Rated Current [A]

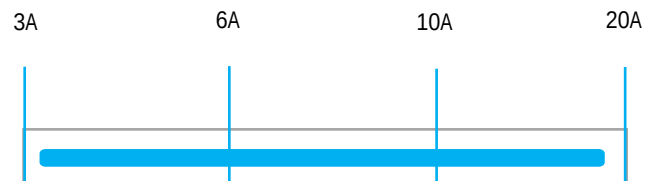


Typical Circuit Diagram

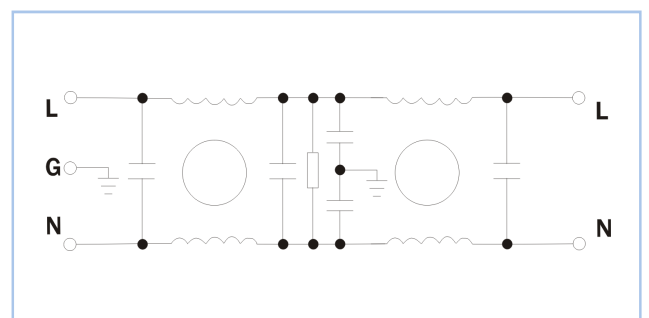


Part No	Rated Current	Rated Current	Case Type	Termination		Safety Certification	Remark
				Input	Output		
DEA4-GD-3A	3A	<1.0mA	A4	terminal	terminal	CUL 、 CE CQC、 ROHS	Parameter customization
DEA4-GD-6A	6A	<1.0mA	A4	terminal	terminal		
DEA4-GD-10A	10A	<1.0mA	A4	terminal	terminal		
DEA4-GD-20A	20A	<1.0mA	A4	terminal	terminal		

Overall Dimension (±1mm)

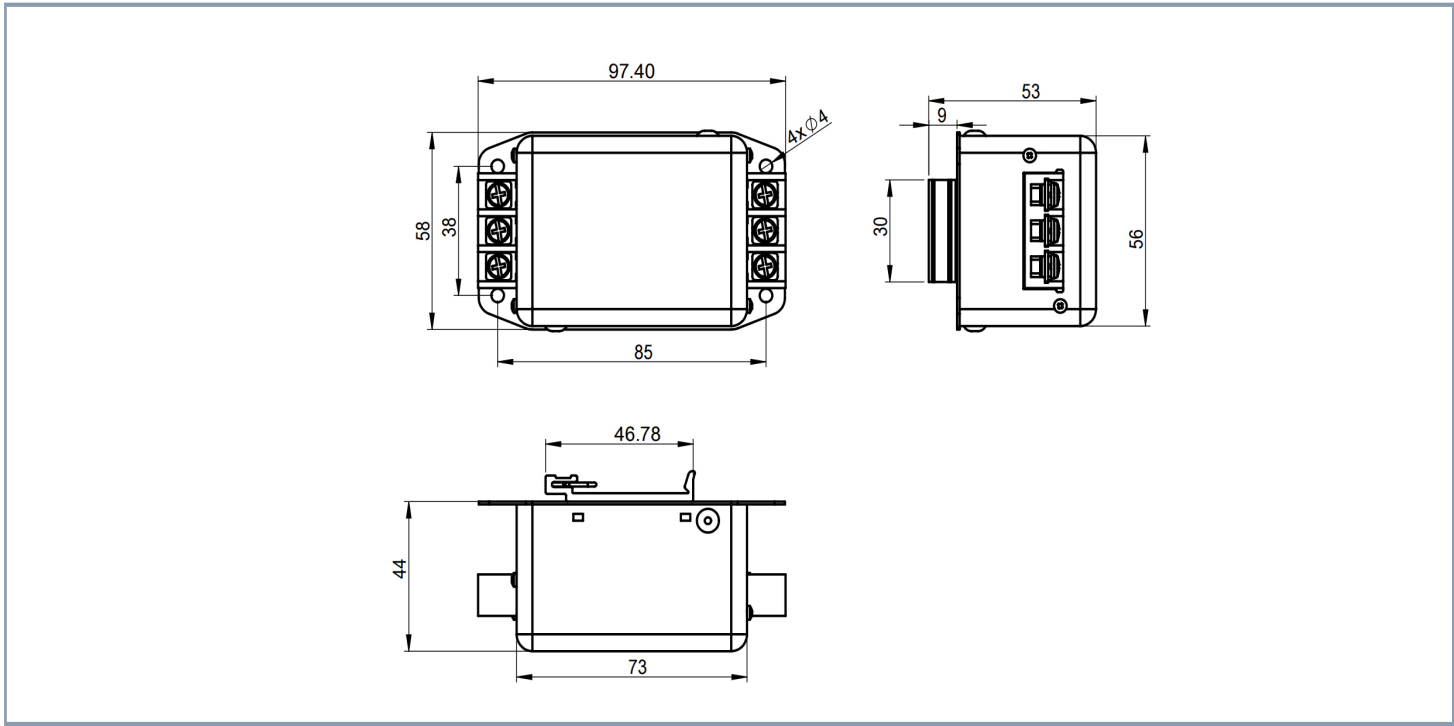


Insertion loss

———— Common mode - - - - - Difference module

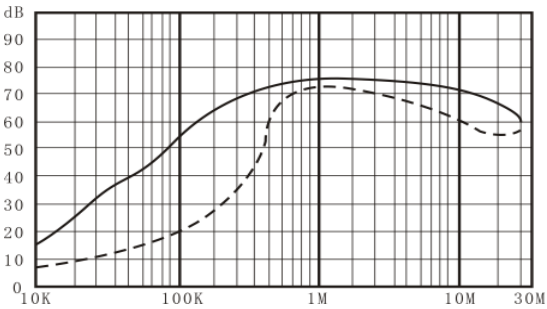

DEA4-6A

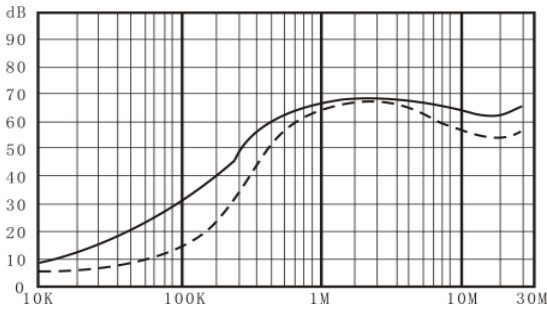

DEA4-10A