


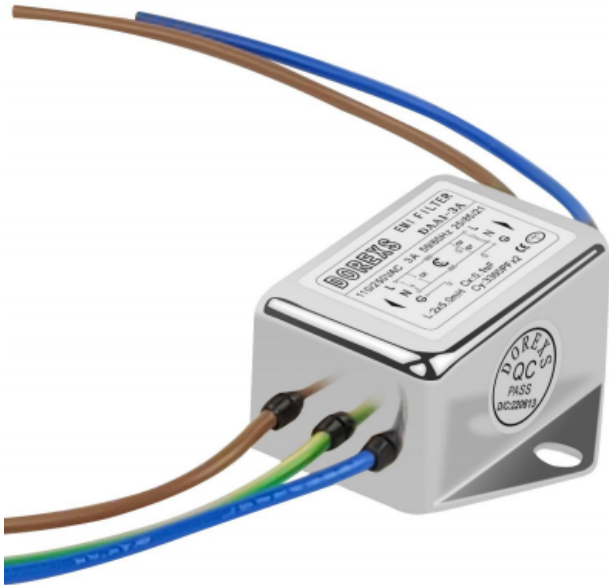

Product information

A series - Conventional universal filters

product description

Small size, easy to install, is a general filter, the use of insert link can be customized, with strong anti -interference, stable performance, a wide range of features.

Technical Data

Rated Voltage	115/250VAC
Line Frequency	50/60Hz
Test Voltage	1500VDC(line/line) 1500VAC(line/ground)
Insulation Resistance	>50MΩ@500VDC
Temperature Rise	<30
Climatic Category	25/085/21
Housing Material	Nickel-plated iron

Approval & Compliance



Features


- Small size, easy to install
- Strong anti-interference, stable performance
- Can be customized upon request

Applications


- Electrical appliances, testing equipment
- Medical equipment
- Grid control system
- Laser cutting equipment
- City security monitoring system and so on

Performance Indicator

standard	High	Very High


Part No	Rated Current	Leakage current	Case Type	Termination		Circuit diagram	Safety Certification	Remark
				Input	Output			
DAA1-1A	1A	<0.5mA	A1				UL CE ROHS CQC	Parameter customization
DAA1-3A	3A	<0.5mA	A1					
DAA1-6A	6A	<0.5mA	A1					
DAA2-10A	10A	<0.5mA	A2					
DBA3-6A	6A	<1.0mA	A3					
DBA3-10A	10A	<1.0mA	A3					
DBA4-20A	20A	<1.0mA	A4					
DBA4-30A	30A	<1.0mA	A4					
DBA5-20A/30A	20A/30A	<1.0mA	A5					
DBA7-50A	50A	<2.0mA	A7					
DBA7-100A	100A	<2.0mA	A7					

Overall Dimension (±1mm)

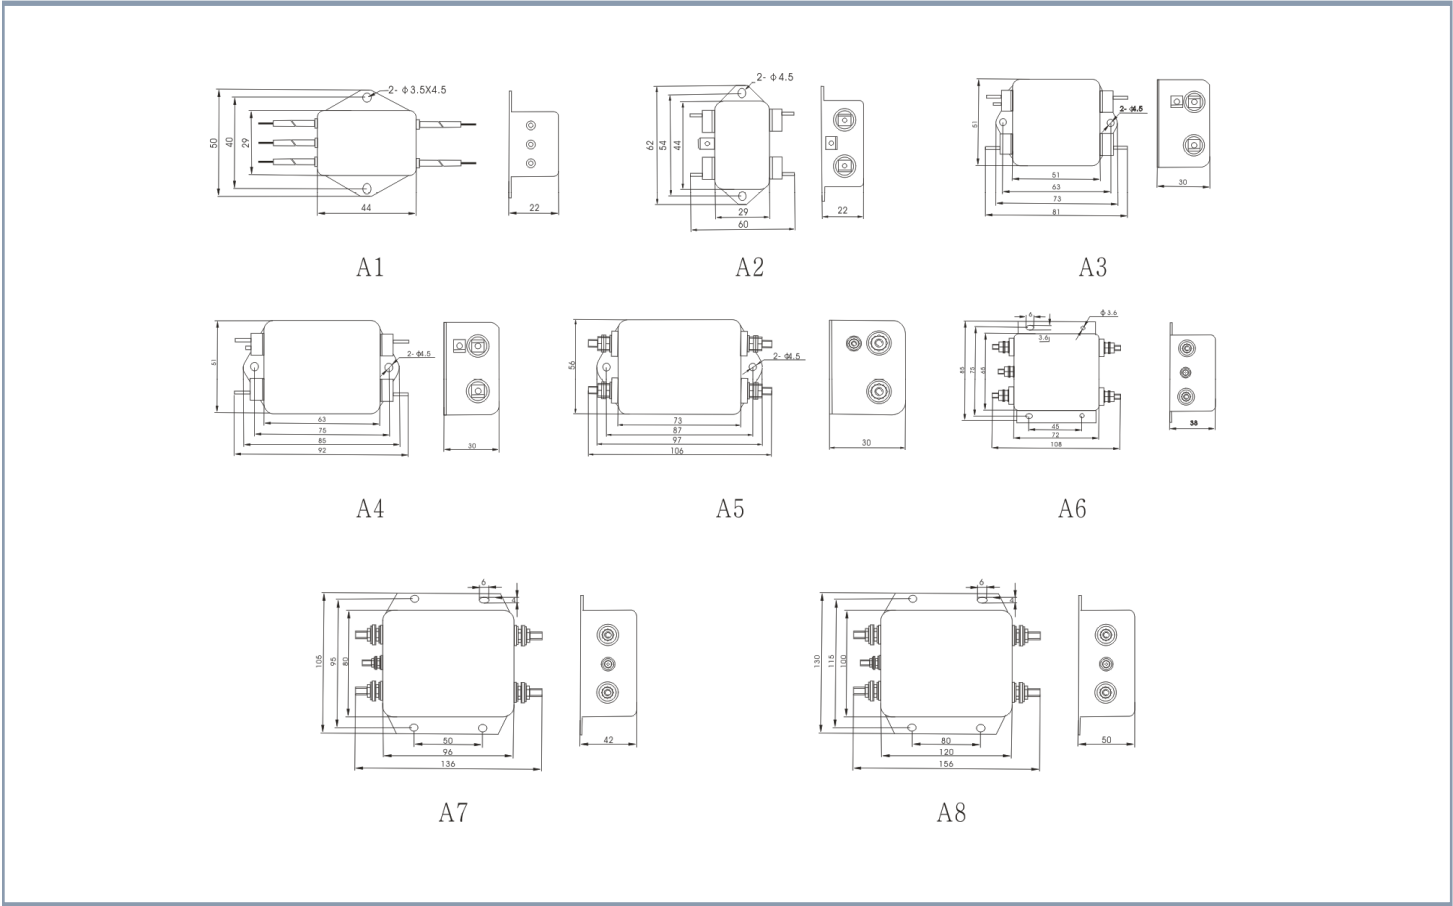


Insertion loss


———— Common mode - - - - - Difference module

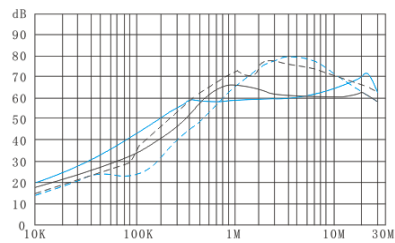


DAA1-1A , DAA1-3A

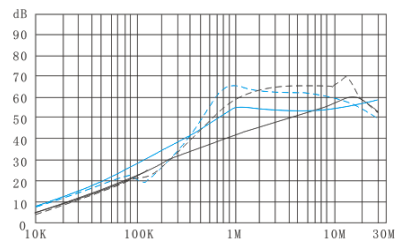


DAA1-6A , DAA2-10A

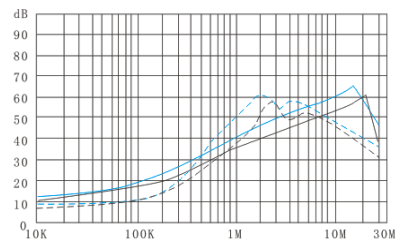


DBA3-6A , DBA3-10A

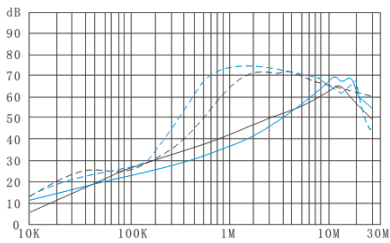

DBA4-20A , DBA5-30A

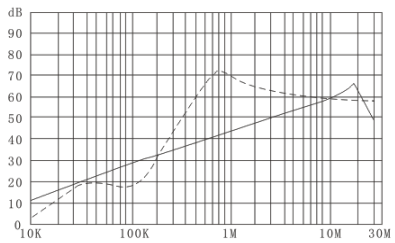

DBA7-50A

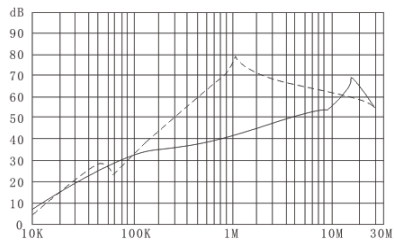

DBA8-100A