



Approval & Compliance



Features

- Differential mode coil filter
- It has good suppression characteristics against differential mode and common mode interference
- Can be customized upon request

Applications

- Industrial control equipment
- Medical equipment
- General electronic equipment
- Power monitoring equipment
- Measuring equipment

Product information

C Series - Three phase four wire

product description





Simple installation, using bolts, terminals and other link methods, can be customized, using bipolar filter circuit design, strong anti-interference, can be used for high current equipment.

Performance Indicator


standard	High	Very High

Technical Data

Rated Voltage	250/440VAC
Line Frequency	50/60Hz
Test Voltage	1500VDC(line/line) 2250VAC(line/ground)
Insulation Resistance	>200MΩ@500VDC
Temperature Rise	<30
Climatic Category	25/085/21
Housing Material	Nickel-plated iron

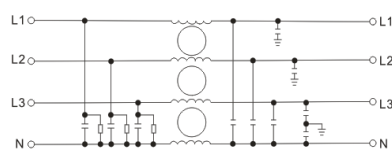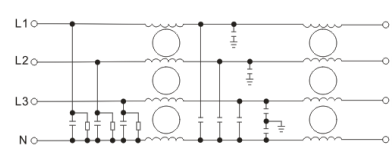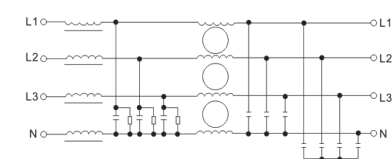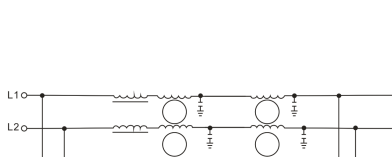
Part No	Rated Current	Leakage current	Case Type	Termination		Circuit diagram	Safety Certification	Remark
				Input	Output			
DAC46-6A	6A	<2.0mA	C46				CE ROHS	Parameter customization
DAC46-10A	10A	<2.0mA	C46					
DAC44-100A	100A	<3.0mA	C44					
DAC44-60A	60A	<3.0mA	C44					
DBC42-10A	10A	<2.0mA	C42					
DBC42-20A	20A	<2.0mA	C42					
DBC44-50A	50A	<3.0mA	C44					
DBC44-100A	100A	<3.0mA	C44					
DCC41-6A	6A	<2.0mA	C41					
DCC41-10A	10A	<2.0mA	C41					
DCC42-20A	20A	<2.0mA	C42					
DCC44-50A	50A	<3.0mA	C44					
DCC42-10A	10A	<4.0mA	C42					
DCC43-20A	20A	<4.0mA	C43					
DCC44-50A	50A	<6.0mA	C44					
DCC45-100A	100A	<6.0mA	C45					

Overall Dimension (±1mm)

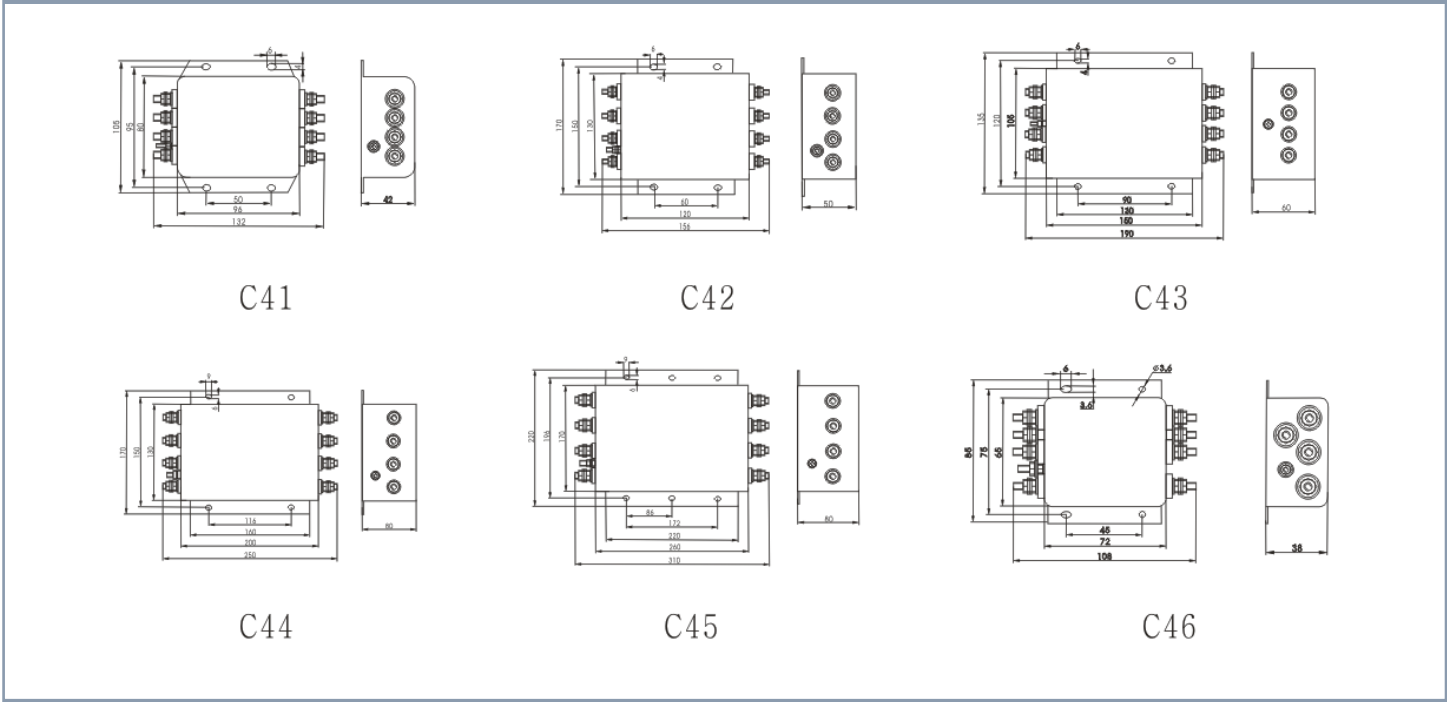


Insertion loss


Common mode Difference module

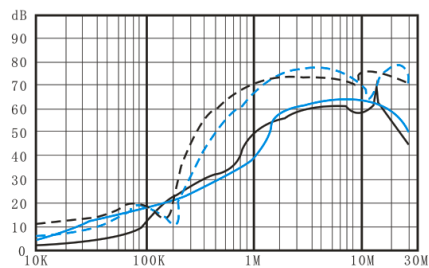


DAC46-6A,DAC46-10A

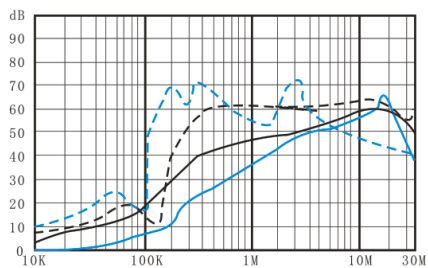


DAC44-100A,DAC44-150A

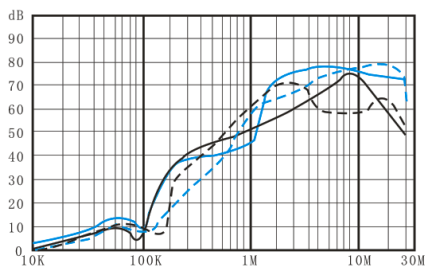


DBC42-10A,DBC42-20A

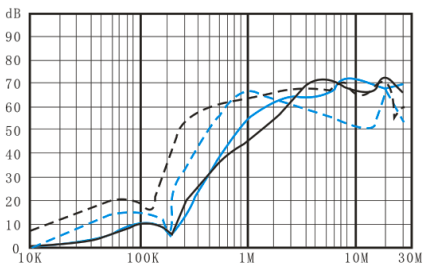


DBC44-50A,DBC44-100A

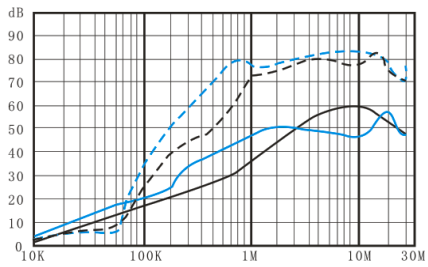


DCC41-6A,DCC41-10A

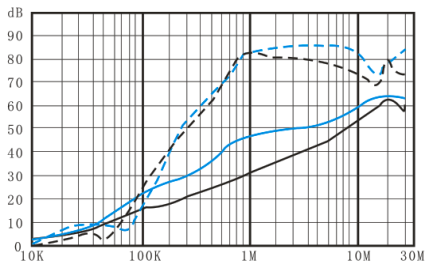

DCC42-20A,DCC44-50A

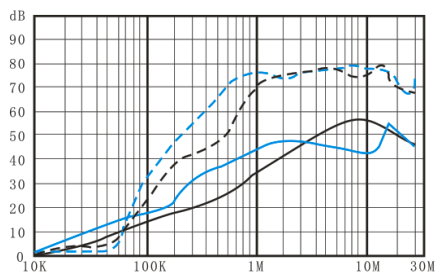

DDC42-10A,DDC43-20A

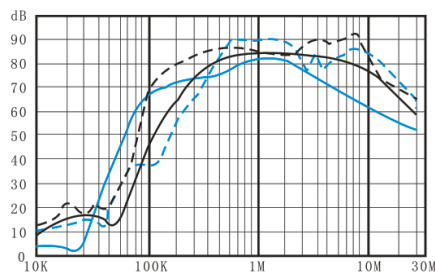

DDC44-50A,DDC45-100A