



PERLIGHT SOLAR
Powering Possibilities


QUICK SOLAR KIT Ground

PLM-QSK400-G / PLM-QSK800-G



Product
Warranty

Applicable for



Flat Ground



Angle Adjustable



Solid



Highly Waterproof



Wind-resistant
Snow-prevention



Pre-Assembly




All-in-one Design



Angle Adjustable for
More Power Generation



Built-in WiFi,
APP Remote Monitoring



Output Power 400W/800W
Can be Adjusted According to
Local Regulations

Technical Data


Model	PLM-QSK400-G	PLM-QSK800-G
PV Module Parameter *		
Module Power(Pmpp @STC)	400 (400 - 460 optional)	400*2 (400 - 460 optional)
Max. Module Efficiency	20.7% (up to 24%)	20.7% (up to 24%)
Temp. Coef. (Power)	-0.34%/°C	-0.34%/°C
Color	Black	Black
AC Output Parameter		
Max. System Continous Output Power (W)**	400	800
Max. Output Current (A)	2	4
Nominal Output Voltage (V)***	220/230/240	
Nominal Frequency (Hz)***	50/60	
Power Factor	>0.99	
Output Current Harmonic Distortion	<3%	
Length of AC End Cable***	5m (10m, 15m optional)	
Certification		
Solar Module	CE,TUV,UL,CQC,IEC 61215,IEC 61730	
Microinverter	CE-LVD,CE-EMC,CE-RED,VDE 4105,EN 50549-1	
Environmental Parameter		
Environmental Protection Rating	Ip67	
Operating Ambient Temperature Range	-40°C to 60°C	
Relative Humidity	0-100%	
Max. Operating Altitude Without Derating [m]	2000	
Mechanical Parameter		
Weight [kg]	29.5	59
Package Dimensions (W×H×D mm)	1724x1164x90	1724x1164x90 *2pcs
Color	S: Silver / B:Black / BC: Blakc Piemer (Back Contact PV module)	
Warranty	12 years	

* The colour , brand and power of the solar module can be customized if the PV module is compatible to QSK system.
** The output power of the system can be limited to 300W(QSK400) or 600W(QSK800).
*** The AC voltage , frequency range and plug type may vary depending on specific country grid.


Ordering Information

Model		
Ground	PLM-QSK400-G	PERLIGHT QSK Ground (400W Full black panel, Black bracket, micro inverter MS400, end cable 5m and plug)
Ground	PLM-QSK800-G	PERLIGHT QSK Ground (400W Full black panel*2, Black bracket*2, micro inverter MS800, DC cable 2m*2, end cable 5m and plug)


Standard Configuration

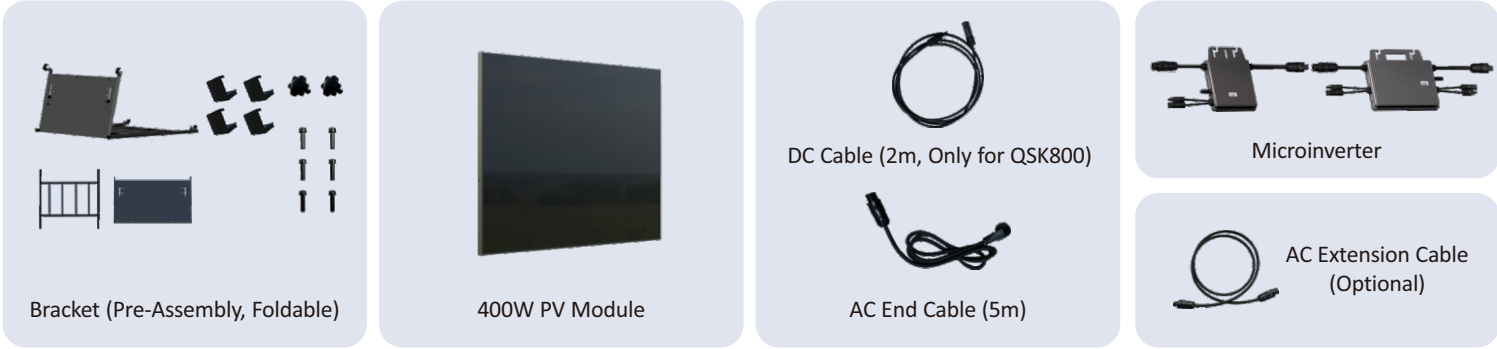



System Diagram

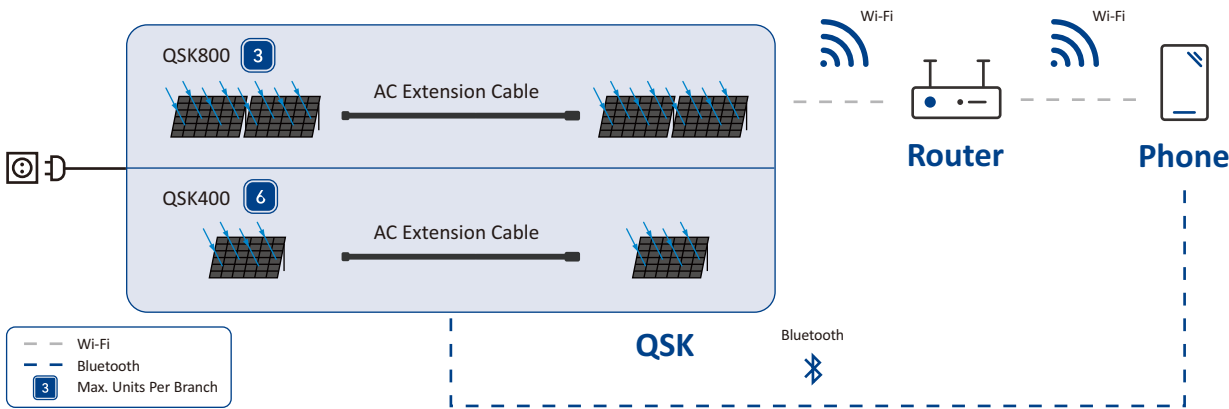

Monitoring Platform

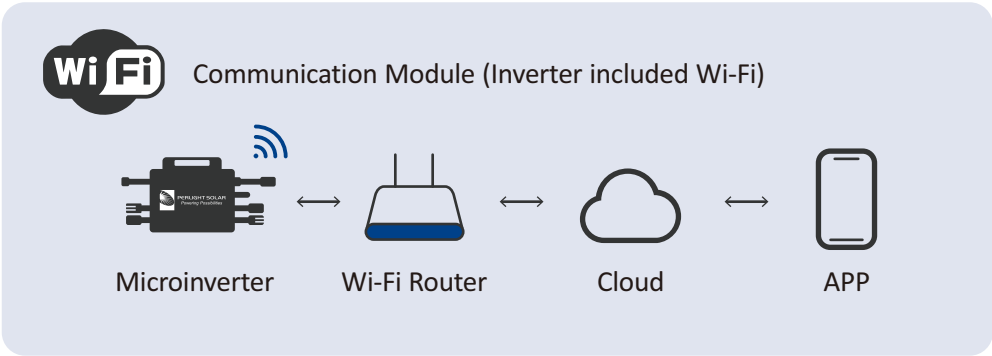

Application

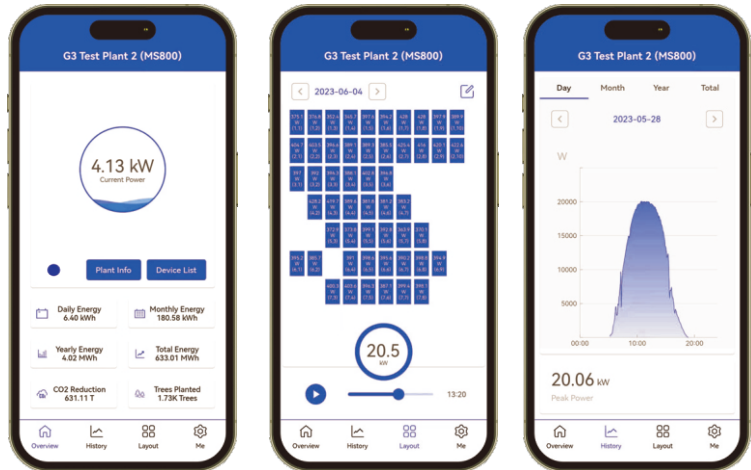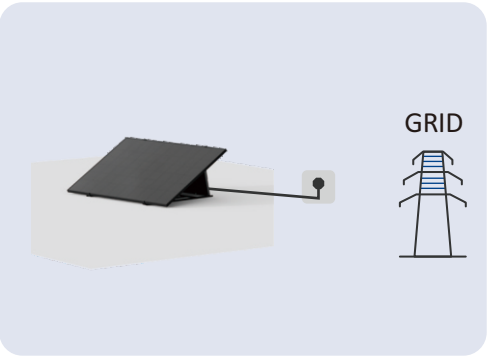

Talent Home is an **energy monitoring mobile application software**.

Users can use Talent Home to monitor the **real-time operation of the entire pv power generation system**.

Monitor Generation Data of Solar Plant

[One-button to Connect Network](#)

Power Generation Statistics

[Module-level Monitoring System](#)

Fast Network Configuration