SIEMENS

## Data sheet 3RW5226-1AC14

SIRIUS soft starter 200-480 V 77 A, 110-250 V AC Screw terminals Analog output

| | |
|---|---|
| **product brand name** | SIRIUS |
| **product category** | Hybrid switching devices |
| **product designation** | Soft starter |
| **product type designation** | 3RW52 |
| **manufacturer's article number** | |
| ● of standard HMI module usable | 3RW5980-0HS00 |
| ● of high feature HMI module usable | 3RW5980-0HF00 |
| ● of communication module PROFINET standard usable | 3RW5980-0CS00 |
| ● of communication module PROFIBUS usable | 3RW5980-0CP00 |
| ● of communication module Modbus TCP usable | 3RW5980-0CT00 |
| ● of communication module Modbus RTU usable | 3RW5980-0CR00 |
| ● of communication module Ethernet/IP | 3RW5980-0CE00 |
| ● of circuit breaker usable at 400 V | 3VA2110-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10 |
| ● of circuit breaker usable at 500 V | 3VA2110-7MN32-0AA0; Type of coordination 1, Iq = 20 kA, CLASS 10 |
| ● of circuit breaker usable at 400 V at inside-delta circuit | 3VA2216-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10 |
| ● of circuit breaker usable at 500 V at inside-delta circuit | 3VA2216-7MN32-0AA0; Type of coordination 1, Iq = 20 kA, CLASS 10 |
| ● of the gG fuse usable up to 690 V | 3NA3132-6; Type of coordination 1, Iq = 65 kA |
| ● of the gG fuse usable at inside-delta circuit up to 500 V | 3NA3132-6; Type of coordination 1, Iq = 65 kA |
| ● of full range R fuse link for semiconductor protection usable up to 690 V | 3NE1224-0; Type of coordination 2, Iq = 65 kA |
| ● of back-up R fuse link for semiconductor protection usable up to 690 V | 3NE8024-1; Type of coordination 2, Iq = 65 kA |
| **General technical data** | |
| **starting voltage [%]** | 30 ... 100 % |
| **stopping voltage [%]** | 50 %; non-adjustable |
| **start-up ramp time of soft starter** | 0 ... 20 s |
| **current limiting value [%] adjustable** | 130 ... 700 % |
| **certificate of suitability** | |
| ● CE marking | Yes |
| ● UL approval | Yes |
| ● CSA approval | Yes |
| **product component** | |
| ● HMI-High Feature | No |
| ● is supported HMI-Standard | Yes |
| ● is supported HMI-High Feature | Yes |
| **product feature integrated bypass contact system** | Yes |
| **number of controlled phases** | 3 |
| **buffering time in the event of power failure** | |
| ● for main current circuit | 100 ms |
| ● for control circuit | 100 ms |
| **insulation voltage rated value** | 600 V |


Subject to change without notice
© Copyright Siemens

| | |
|---|---|
| **degree of pollution** | 3, acc. to IEC 60947-4-2 |
| **impulse voltage rated value** | 6 kV |
| **blocking voltage of the thyristor maximum** | 1 400 V |
| **service factor** | 1 |
| **surge voltage resistance rated value** | 6 kV |
| **maximum permissible voltage for protective separation** | |
| ● between main and auxiliary circuit | 600 V |
| **shock resistance** | 15 g / 11 ms, from 12 g / 11 ms with potential contact lifting |
| utilization category according to IEC 60947-4-2 | AC 53a |
| **reference code according to IEC 81346-2** | Q |
| **Substance Prohibitance (Date)** | 02/15/2018 |
| **SVHC substance name** | Lead - 7439-92-1<br>Lead monoxide (lead oxide) - 1317-36-8<br>2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5<br>2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7<br>1,6,7,8,9,14,15,16,17,17,18,18-Dodecachloropentacyclo[12.2.1.16,9.02,13.05,10]octadeca-7,15-diene (“Dechlorane Plus”™) covering any of its individual anti- and syn-isomers or any combination thereof - -<br>Dibutylbis(pentane-2,4-dionato-O,O')tin - 22673-19-4<br>Dodecamethylcyclohexasiloxane (D6) - 540-97-6 |
| **product function** | |
| ● ramp-up (soft starting) | Yes |
| ● ramp-down (soft stop) | Yes |
| ● Soft Torque | Yes |
| ● adjustable current limitation | Yes |
| ● pump ramp down | Yes |
| ● intrinsic device protection | Yes |
| ● motor overload protection | Yes; Electronic motor overload protection |
| ● evaluation of thermistor motor protection | No |
| ● inside-delta circuit | Yes |
| ● auto-RESET | Yes |
| ● manual RESET | Yes |
| ● remote reset | Yes; By turning off the control supply voltage |
| ● communication function | Yes |
| ● operating measured value display | Yes; Only in conjunction with special accessories |
| ● error logbook | Yes; Only in conjunction with special accessories |
| ● via software parameterizable | No |
| ● via software configurable | Yes |
| ● **PROFIenergy** | Yes; in connection with the PROFINET Standard communication module |
| ● **firmware update** | Yes |
| ● **removable terminal for control circuit** | Yes |
| ● torque control | No |
| ● analog output | Yes; 4 ... 20 mA (default) / 0 ... 10 V (parameterizable with High Feature HMI) |
| **Power Electronics** | |
| **operational current** | |
| ● at 40 °C rated value | 77 A |
| ● at 50 °C rated value | 68 A |
| ● at 60 °C rated value | 62 A |
| **operational current at inside-delta circuit** | |
| ● at 40 °C rated value | 133 A |
| ● at 50 °C rated value | 118 A |
| ● at 60 °C rated value | 107 A |
| **operating voltage** | |
| ● rated value | 200 ... 480 V |
| ● at inside-delta circuit rated value | 200 ... 480 V |
| **relative negative tolerance of the operating voltage** | -15 % |
| **relative positive tolerance of the operating voltage** | 10 % |
| **relative negative tolerance of the operating voltage at inside-delta circuit** | -15 % |
| **relative positive tolerance of the operating voltage at inside-delta circuit** | 10 % |
| **operating power for 3-phase motors** | |
| ● at 230 V at 40 °C rated value | 22 kW |


Subject to change without notice
© Copyright Siemens

| | |
|---|---|
| ● at 230 V at inside-delta circuit at 40 °C rated value | 37 kW |
| ● at 400 V at 40 °C rated value | 37 kW |
| ● at 400 V at inside-delta circuit at 40 °C rated value | 75 kW |
| **Operating frequency 1 rated value** | 50 Hz |
| **Operating frequency 2 rated value** | 60 Hz |
| **relative negative tolerance of the operating frequency** | -10 % |
| **relative positive tolerance of the operating frequency** | 10 % |
| **adjustable motor current** | |
| ● at rotary coding switch on switch position 1 | 32 A |
| ● at rotary coding switch on switch position 2 | 35 A |
| ● at rotary coding switch on switch position 3 | 38 A |
| ● at rotary coding switch on switch position 4 | 41 A |
| ● at rotary coding switch on switch position 5 | 44 A |
| ● at rotary coding switch on switch position 6 | 47 A |
| ● at rotary coding switch on switch position 7 | 50 A |
| ● at rotary coding switch on switch position 8 | 53 A |
| ● at rotary coding switch on switch position 9 | 56 A |
| ● at rotary coding switch on switch position 10 | 59 A |
| ● at rotary coding switch on switch position 11 | 62 A |
| ● at rotary coding switch on switch position 12 | 65 A |
| ● at rotary coding switch on switch position 13 | 68 A |
| ● at rotary coding switch on switch position 14 | 71 A |
| ● at rotary coding switch on switch position 15 | 74 A |
| ● at rotary coding switch on switch position 16 | 77 A |
| ● minimum | 32 A |
| **adjustable motor current** | |
| ● for inside-delta circuit at rotary coding switch on switch position 1 | 55.4 A |
| ● for inside-delta circuit at rotary coding switch on switch position 2 | 60.6 A |
| ● for inside-delta circuit at rotary coding switch on switch position 3 | 65.8 A |
| ● for inside-delta circuit at rotary coding switch on switch position 4 | 71 A |
| ● for inside-delta circuit at rotary coding switch on switch position 5 | 76.2 A |
| ● for inside-delta circuit at rotary coding switch on switch position 6 | 81.4 A |
| ● for inside-delta circuit at rotary coding switch on switch position 7 | 86.6 A |
| ● for inside-delta circuit at rotary coding switch on switch position 8 | 91.8 A |
| ● for inside-delta circuit at rotary coding switch on switch position 9 | 97 A |
| ● for inside-delta circuit at rotary coding switch on switch position 10 | 102 A |
| ● for inside-delta circuit at rotary coding switch on switch position 11 | 107 A |
| ● for inside-delta circuit at rotary coding switch on switch position 12 | 113 A |
| ● for inside-delta circuit at rotary coding switch on switch position 13 | 118 A |
| ● for inside-delta circuit at rotary coding switch on switch position 14 | 123 A |
| ● for inside-delta circuit at rotary coding switch on switch position 15 | 128 A |
| ● for inside-delta circuit at rotary coding switch on switch position 16 | 133 A |
| ● at inside-delta circuit minimum | 55.4 A |
| **minimum load [%]** | 15 %; Relative to smallest settable Ie |
| **power loss [W] for rated value of the current at AC** | |
| ● at 40 °C after startup | 35 W |
| ● at 50 °C after startup | 32 W |
| ● at 60 °C after startup | 31 W |
| **power loss [W] at AC at current limitation 350 %** | |
| ● at 40 °C during startup | 1 107 W |


Subject to change without notice
© Copyright Siemens

| | |
|---|---|
| ● at 50 °C during startup | 933 W |
| ● at 60 °C during startup | 826 W |
| **Control circuit/ Control** | |
| **type of voltage of the control supply voltage** | AC |
| **control supply voltage at AC** | |
| ● at 50 Hz | 110 ... 250 V |
| ● at 60 Hz | 110 ... 250 V |
| **relative negative tolerance of the control supply voltage at AC at 50 Hz** | -15 % |
| **relative positive tolerance of the control supply voltage at AC at 50 Hz** | 10 % |
| **relative negative tolerance of the control supply voltage at AC at 60 Hz** | -15 % |
| **relative positive tolerance of the control supply voltage at AC at 60 Hz** | 10 % |
| **control supply voltage frequency** | 50 ... 60 Hz |
| **relative negative tolerance of the control supply voltage frequency** | -10 % |
| **relative positive tolerance of the control supply voltage frequency** | 10 % |
| **control supply current in standby mode rated value** | 30 mA |
| **holding current in bypass operation rated value** | 75 mA |
| **inrush current by closing the bypass contacts maximum** | 2.5 A |
| inrush current peak at application of control supply voltage maximum | 12.2 A |
| duration of inrush current peak at application of control supply voltage | 2.2 ms |
| **design of the overvoltage protection** | Varistor |
| **design of short-circuit protection for control circuit** | 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply |
| **Inputs/ Outputs** | |
| **number of digital inputs** | 1 |
| ● **number of digital outputs** | 3 |
| ● number of digital outputs not parameterizable | 2 |
| **digital output version** | 2 normally-open contacts (NO) / 1 changeover contact (CO) |
| **number of analog outputs** | 1 |
| **switching capacity current of the relay outputs** | |
| ● at AC-15 at 250 V rated value | 3 A |
| ● at DC-13 at 24 V rated value | 1 A |
| **Installation/ mounting/ dimensions** | |
| **mounting position** | with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back |
| **fastening method** | screw fixing |
| **height** | 306 mm |
| **width** | 185 mm |
| **depth** | 203 mm |
| required spacing with side-by-side mounting | |
| ● forwards | 10 mm |
| ● backwards | 0 mm |
| ● upwards | 100 mm |
| ● downwards | 75 mm |
| ● at the side | 5 mm |
| **weight without packaging** | 5.6 kg |
| **Connections/ Terminals** | |
| **type of electrical connection** | |
| ● for main current circuit | box terminal |
| ● for control circuit | screw-type terminals |
| **width of connection bar maximum** | 25 mm |
| **type of connectable conductor cross-sections for main contacts for box terminal** | |
| ● using the front clamping point solid | 1x (2.5 ... 16 mm²) |
| ● using the front clamping point finely stranded with core | 1x (2.5 ... 50 mm²) |


Subject to change without notice
© Copyright Siemens

| | |
|---|---|
| end processing | |
| ● using the front clamping point stranded | 1x (10 ... 70 mm²) |
| ● using the back clamping point solid | 1x (2.5 ... 16 mm²) |
| ● r box terminal using the back clamping point | 1x (10 ... 2/0) |
| ● using both clamping points solid | 2x (2.5 ... 16 mm²) |
| ● using both clamping points finely stranded with core end processing | 2x (2.5 ... 35 mm²) |
| ● using both clamping points stranded | 2x (6 ... 16 mm²), 2x (10 ... 50 mm²) |
| ● using the back clamping point finely stranded with core end processing | 1x (2.5 ... 50 mm²) |
| ● using the back clamping point stranded | 1x (10 ... 70 mm²) |
| **type of connectable conductor cross-sections** | |
| ● for control circuit solid | 1x (0.5 ... 4.0 mm²), 2x (0.5 ... 2.5 mm²) |
| ● for control circuit finely stranded with core end processing | 1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1.5 mm²) |
| ● for AWG cables for control circuit solid | 1x (20 ... 12), 2x (20 ... 14) |
| **wire length** | |
| ● between soft starter and motor maximum | 800 m |
| ● at the digital inputs at AC maximum | 100 m |
| **tightening torque** | |
| ● for main contacts with screw-type terminals | 4.5 ... 6 N·m |
| ● for auxiliary and control contacts with screw-type terminals | 0.8 ... 1.2 N·m |
| **tightening torque [lbf·in]** | |
| ● for main contacts with screw-type terminals | 40 ... 53 lbf·in |
| ● for auxiliary and control contacts with screw-type terminals | 7 ... 10.3 lbf·in |
| **Ambient conditions** | |
| installation altitude at height above sea level maximum | 5 000 m; Derating as of 1000 m, see catalog |
| **ambient temperature** | |
| ● during operation | -25 ... +60 °C; Please observe derating at temperatures of 40 °C or above |
| ● during storage and transport | -40 ... +80 °C |
| **environmental category** | |
| ● during operation according to IEC 60721 | 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 |
| ● during storage according to IEC 60721 | 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 |
| ● during transport according to IEC 60721 | 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) |
| **EMC emitted interference** | acc. to IEC 60947-4-2: Class A |
| **Communication/ Protocol** | |
| **communication module is supported** | |
| ● PROFINET standard | Yes |
| ● EtherNet/IP | Yes |
| ● Modbus RTU | Yes |
| ● Modbus TCP | Yes |
| ● PROFIBUS | Yes |
| **UL/CSA ratings** | |
| **manufacturer's article number** | |
| ● **of circuit breaker usable for Standard Faults** | |
| — at 460/480 V according to UL | Siemens type: 3VA51, max. 125 A; Iq = 10 kA |
| — 60/480 V according to UL | Siemens type: 3VA51, max. 125 A; Iq max = 65 kA |
| — at 460/480 V at inside-delta circuit according to UL | Siemens type: 3VA51, max. 125 A; Iq = 10 kA |
| — 60/480 V at inside-delta circuit according to UL | Siemens type: 3VA51, max. 125 A; Iq max = 65 kA |
| — at 575/600 V according to UL | Siemens type: 3VA51, max. 125 A; Iq = 10 kA |
| — at 575/600 V at inside-delta circuit according to UL | Siemens type: 3VA51, max. 125 A; Iq = 10 kA |
| ● **of the fuse** | |
| — usable for Standard Faults up to 575/600 V according to UL | Type: Class RK5 / K5, max. 250 A; Iq = 10 kA |
| — usable for High Faults up to 575/600 V according to UL | Type: Class J / L, max. 250 A; Iq = 100 kA |
| — usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL | Type: Class RK5 / K5, max. 250 A; Iq = 10 kA |
| — usable for High Faults at inside-delta circuit up to 575/600 V according to UL | Type: Class J / L, max. 250 A; Iq = 100 kA |
| **operating power [hp] for 3-phase motors** | |


Subject to change without notice
© Copyright Siemens

| | |
|---|---|
| ● at 200/208 V at 50 °C rated value | 20 hp |
| ● at 220/230 V at 50 °C rated value | 25 hp |
| ● at 460/480 V at 50 °C rated value | 50 hp |
| ● at 200/208 V at inside-delta circuit at 50 °C rated value | 30 hp |
| ● at 220/230 V at inside-delta circuit at 50 °C rated value | 40 hp |
| ● at 460/480 V at inside-delta circuit at 50 °C rated value | 75 hp |
| **contact rating of auxiliary contacts according to UL** | R300-B300 |
| Electrical Safety | |
| **protection class IP on the front according to IEC 60529** | IP00; IP20 with cover |
| **touch protection on the front according to IEC 60529** | finger-safe, for vertical contact from the front with cover |

## Approvals Certificates

### General Product Approval

Confirmation

| General Product Approval | EMV | Test Certificates | Marine / Shipping |
|---|---|---|---|
| | KC | Type Test Certificates/Test Report | |

| Marine / Shipping | other |
|---|---|
| | Confirmation |

## Further information

**Information on the packaging**
https://support.industry.siemens.com/cs/ww/en/view/109813875
**Information- and Downloadcenter (Catalogs, Brochures,…)**
https://www.siemens.com/ic10
**Industry Mall (Online ordering system)**
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5226-1AC14
**Cax online generator**
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5226-1AC14
**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
https://support.industry.siemens.com/cs/ww/en/ps/3RW5226-1AC14
**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5226-1AC14&lang=en
**Characteristic: Tripping characteristics, $I^2t$, Let-through current**
https://support.industry.siemens.com/cs/ww/en/ps/3RW5226-1AC14/char
**Characteristic: Installation altitude**
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5226-1AC14&objecttype=14&gridview=view1
**Simulation Tool for Soft Starters (STS)**
https://support.industry.siemens.com/cs/ww/en/view/101494917


Subject to change without notice
© Copyright Siemens

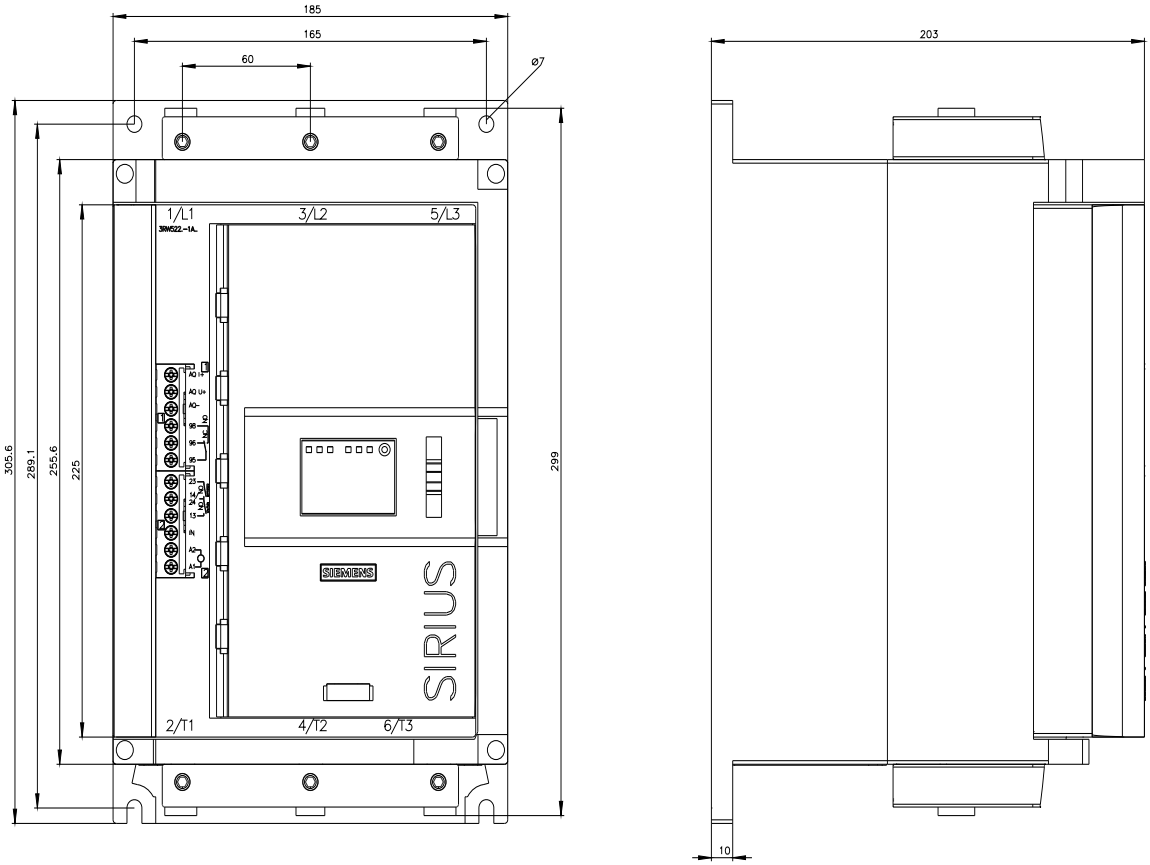


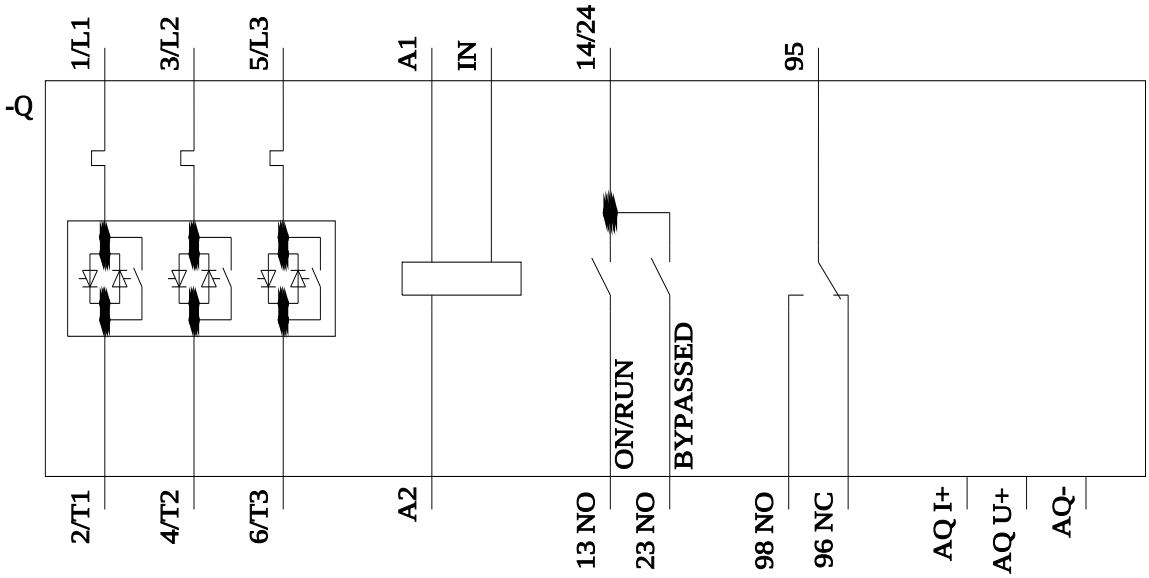


**last modified:** 3/11/2024


Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens