



## 规格书 Specification

制造商:深圳市毫欧电子有限公司

HoRM

适用: 本规格书适用于深圳市毫欧电子有限公司陶瓷合金电阻 HoRM系列产品选型。

### ■ Metal Alloy Low Resistance Chip Resistor — RM Series

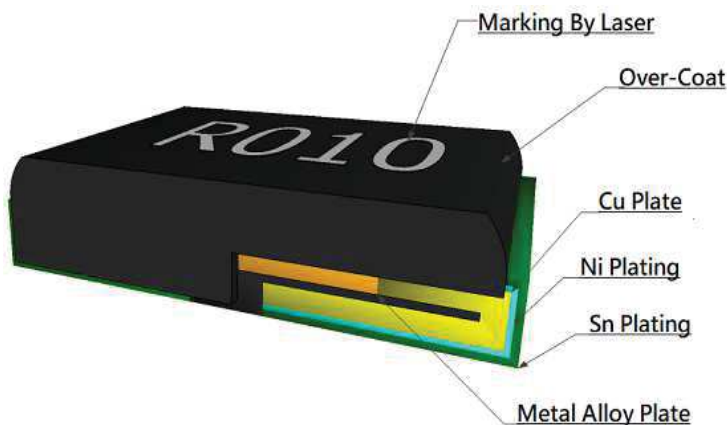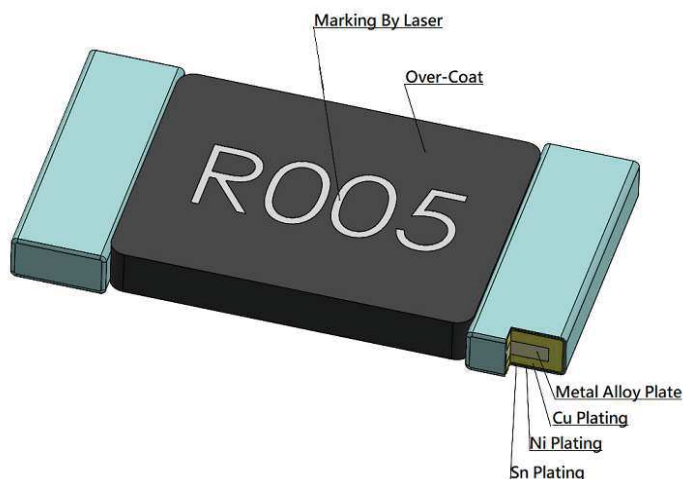

#### ■ Application

- Entertainment equipment
- Power Supply
- Measuring instrument
- Industrial equipment
- Battery management system

#### ■ Features

- Low Resistance / Low TCR/ Low Inductance(Only \*Z)
- Excellent long term stability
- RoHs compliant and halogen free.
- Lead free.
- High precision current sensing and voltage division.
- AEC-Q200 Compliant

#### ■ Parts Number Explanation

#### ■ Example:

| Ho      | RM   | 2512         | 2W             | 20mR                    | 1%                            |
|---------|------|--------------|----------------|-------------------------|-------------------------------|
| ↓       | ↓    | ↓            | ↓              | ↓                       | ↓                             |
| 制造商     | 产品系列 | 封装           | 额定功率           | 阻值                      | 精度                            |
| Ho 毫欧电子 | 陶瓷合金 | 2512<br>2818 | 2W<br>3W<br>5W | 5.0mR=R005<br>10mR=R010 | F : ±1%<br>G : ±2%<br>J : ±5% |



地址: 深圳市龙华新区观澜大布头路南通邦高新产业园 A 栋 8 楼

Standard Electrical Specifications


| Type                      | Rating Power at 70℃ | T.C.R. (ppm/℃) | Max. Rating Current | Max. Overload Current | Resistance Range (mΩ)            | Material           | Operating Temperature Range (℃) |
|---------------------------|---------------------|----------------|---------------------|-----------------------|----------------------------------|--------------------|---------------------------------|
|                           |                     |                |                     |                       | 1.0% (F)<br>2.0% (G)<br>5.0% (J) |                    |                                 |
| RM2512*Z <sub>note3</sub> | 2W                  | ≤±50           | 31.62A              | 70.71A                | 2~20                             | R002~R020 : MnCu   | - 55 ~ + 170                    |
|                           | 3W                  | ≤±50           | 38.73A              | 86.60A                | 2~20                             | R002~R020 : MnCu   |                                 |
| RM2512*G                  | 2W                  | ≤±100          | 44.72A              | 100.00A               | 1                                | R001~R004 : MnCu   |                                 |
|                           |                     | ≤±50           | 31.62A              | 70.71A                | 2~50                             | R005~R050 : FeCrAl |                                 |
|                           | 3W                  | ≤±100          | 54.77A              | 122.47A               | 1                                | R001~R003 : MnCu   |                                 |
|                           |                     | ≤±50           | 38.73A              | 86.60A                | 2~50                             | R004~R050 : FeCrAl |                                 |
| RM2818*Z <sub>note3</sub> | 5W <sub>note2</sub> | ≤±250          | 70.71A              | 141.42A               | 1                                | R001~R007 : MnCu   | - 65 ~ + 170                    |
|                           | 7W <sub>note1</sub> | ≤±200          | 50.00A              | 100.00A               | 2~7                              |                    |                                 |
|                           |                     | ≤±75           | 25.00A              | 50.00A                | 8~50                             | R008~R050 : NiCrAl |                                 |

- Notes:
1.

The RM2818 is rated at 7 W with maximum surface temperature of 180 °C and maximum terminal temperature of 70 °C.
2.


The RM2818 is rated at 5 W with maximum terminal temperature of 100 °C.
3.

Inductance characteristics RM 2512\*Z, MR 2818\*Z≤5nH

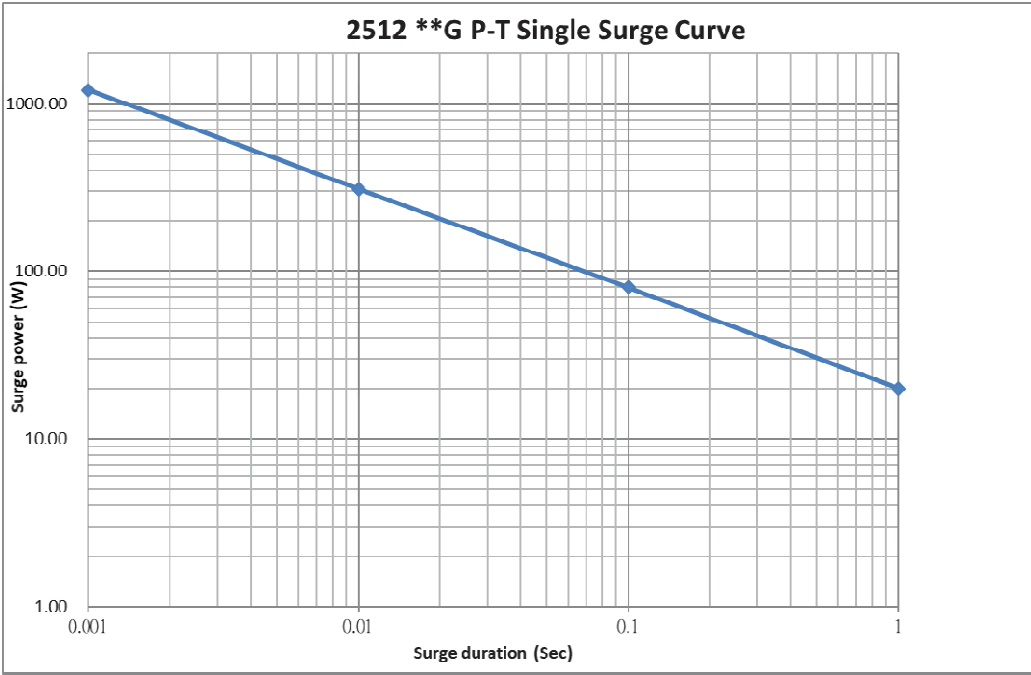

地址：深圳市龙华新区观澜大布头路南通邦高新产业园 A 栋 8 楼

## Type Dimension

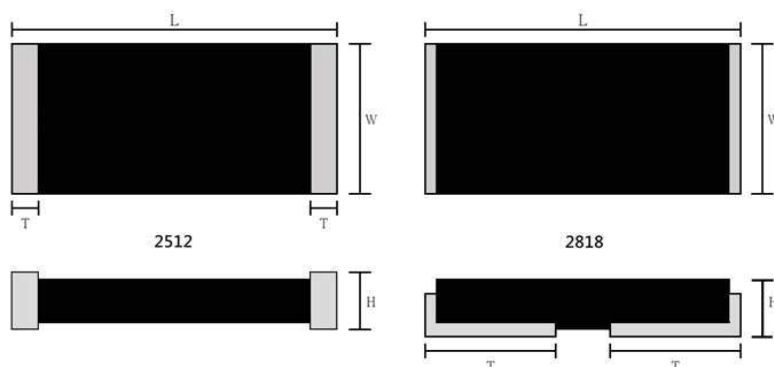

## Dimension

Unit : mm

| Type     | Power Rating | Resistance Range | L          | W          | H          | T          |
|----------|--------------|------------------|------------|------------|------------|------------|
| RM2512*Z | 2W           | 2~20mΩ           | 6.35±0.254 | 3.10±0.254 | 0.70±0.254 | 0.95±0.254 |
|          | 3W           | 2~20mΩ           |            |            | 0.70±0.254 | 0.95±0.254 |
| RM2512*G | 2W           | 1mΩ              |            |            | 0.90±0.254 | 1.9±0.254  |
|          | 2W           | 2mΩ~4mΩ          |            |            | 0.90±0.254 | 0.80±0.254 |
|          | 2W           | 5mΩ~50mΩ         |            |            | 0.90±0.254 | 0.80±0.254 |
|          | 3W           | 1mΩ~3mΩ          |            |            | 1.10±0.254 | 0.80±0.254 |
|          | 3W           | 4mΩ              |            |            | 1.10±0.254 | 0.80±0.254 |
|          | 3W           | 5mΩ~50mΩ         |            |            | 0.90±0.254 | 0.80±0.254 |
| RM2818*Z | 5W           | 1~50mΩ           | 7.15±0.254 | 4.95±0.254 | 1.65±0.254 | 2.90±0.254 |


地址：深圳市龙华新区观澜大布头路南通邦高新产业园 A 栋 8 楼

## ■ Performance Characteristics

### Power Derating Curve

The Operating Temperature Range: -55°C ~+170°C.

For resistors operated in ambient temperatures above 70°C, power rating must be derating in accordance with the curve as below :

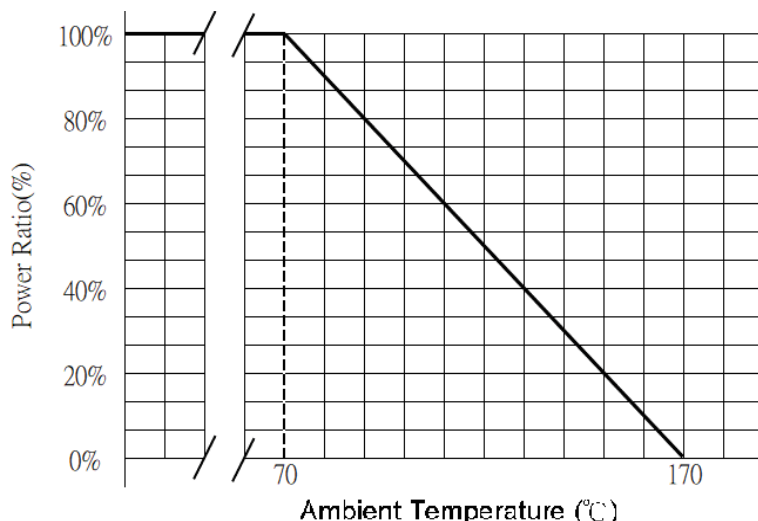

## ■ Rating Current

The following equation may be used to determine the DC (Direct Current) or AC (Alternating Current) (RMS, root mean square value) of normal rated power. However, if the result value exceeds the highest current of regulated standards, the highest normal rated power is to be used

$$I = \sqrt{P/R}$$

I = Rating current (A)  
 P = Rating Power (W)  
 R = Resistance(Ω)

## ■ Marking Format:

- Marking By Laser
- All the products marking are 4 digits.
- “R” designates the decimal location in ohms  
 e.g. 3mΩ the product marking is R003.  
 10mΩ the product marking is R010.
- The criteria to distinguishing the mark on the surface of products are that characters can be identified.

地址：深圳市龙华新区观澜大布头路南通邦高新产业园 A 栋 8 楼

|                                                                                               |                |      |            |
|-----------------------------------------------------------------------------------------------|----------------|------|------------|
| <br>毫欧电阻 毫欧制造 | HoRM陶瓷合金电阻系列选型 | 系列号  | HoRM       |
|                                                                                               |                | 修订日期 | 2022-07-05 |
|                                                                                               |                | 版本号  | Ho-A0      |


## ■ Reliability Test and Requirement

| Test Item                                     | Test Method                             | Procedure                                                                                                                                                                   | Requirements                              |
|-----------------------------------------------|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| Temperature Coefficient of Resistance (T.C.R) | JIS-C-5201-1 4.8<br>IEC-60115-1 4.8     | At 25℃ /+125℃, 25℃ is the reference temperature                                                                                                                             | Refer to Ratings                          |
| Short Time Overload                           | JIS-C-5201-1 4.13<br>IEC-60115-1 4.13   | The number of rated power are as follows: ●<br>RM2512-2W: 5 times of rated power<br>RM2512-3W: 5 times of rated power ●<br>RM2818-5W: 4 times of rated power for 5 seconds. | $\Delta R/R1 \leq \pm 1.0\%$              |
| High Temperature Exposure                     | JIS-C5201-1 4.25<br>IEC 60068-2-2       | At 170℃ for 1000 hours.                                                                                                                                                     | $\Delta R/R1 \leq \pm 1.0\%$              |
| Resistance to Soldering Heat                  | JIS-C-5201-1 4.18<br>IEC-60115-1 4.18   | 260±5℃ for 10 seconds.                                                                                                                                                      | $\Delta R/R1 \leq \pm 0.5\%$              |
| Temperature Cycling                           | JESD22 Method JA-104                    | 1000 Cycles (-55℃ to +155℃) Measurement at 24±4 hours after test conclusion. 30min maximum dwell time at each temperature extreme.                                          | $\Delta R/R1 \leq \pm 1.0\%$              |
| Biased Humidity                               | MIL-STD-202 Method 103                  | 1,000 hours; 85℃ / 85% RH, 10% of operating power. Measurement at 24±4 hours after test conclusion.                                                                         | $\Delta R/R1 \leq \pm 1.0\%$              |
| Load Life (Endurance)                         | JIS-C-5201-1 4.25<br>IEC-60115-1 4.25.1 | 70±2℃, RCWV or Max. working voltage whichever is less for 1000 hrs with 1.5 hrs "ON" and 0.5 hr "OFF" .                                                                     | $\Delta R/R1 \leq \pm 1.0\%$              |
| Solderability                                 | JIS-C-5201-1 4.17<br>IEC-60115-1 4.17   | 245±5℃ for 3 seconds.                                                                                                                                                       | >95% coverage                             |
| Dielectric Withstanding Voltage               | JIS-C5201-1 4.7                         | Applied 500VAC for 1 minute.                                                                                                                                                | No short or burned on the appearance.     |
| Core Body Strength                            | JIS-C5201-1 4.15                        | Central part pressurizing force : 5N , 10 seconds                                                                                                                           | No broken                                 |
| Terminal Strength (SMD)                       | AEC Q200-006                            | Pressurizing force : 17.7N , 60 seconds                                                                                                                                     | No broken                                 |
| Bending Strength                              | JIS-C-5201-1 4.33<br>IEC-60115-1 4.33   | Bending once for 2mm , 10 seconds                                                                                                                                           | $\Delta R/R1 \leq \pm 0.5\%$<br>No broken |
| Moisture Resistance                           | MIL-STD 202 Method 106                  | T=24 hours / Cycle ,10Cycles .<br>Steps 7a& 7b not required. Unpowered .<br>(Figure 1)                                                                                      | $\Delta R/R1 \leq \pm 0.5\%$              |



地址：深圳市龙华新区观澜大布头路南通邦高新产业园 A 栋 8 楼

深圳市毫欧电子有限公司 | 电话：0755-28153546 | 传真：0755-22630181 | 网址：www.moolee.com.cn

Figure 1

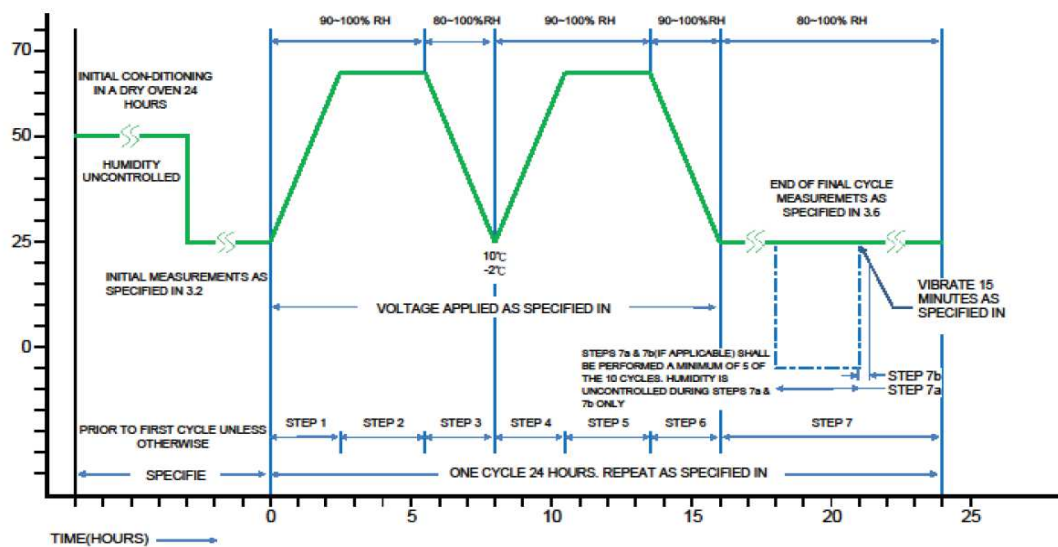


## Soldering Profile

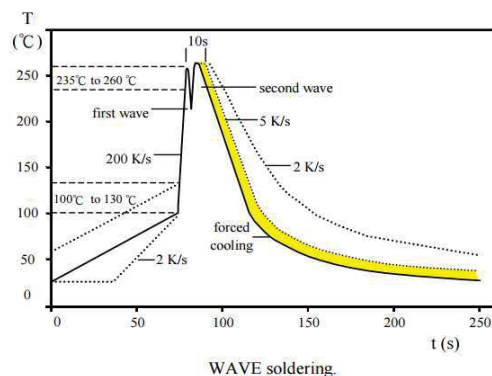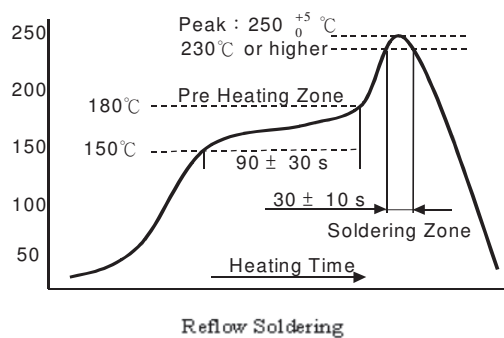

|                                                                                                |                |      |            |
|------------------------------------------------------------------------------------------------|----------------|------|------------|
| <br>毫欧电阻 毫欧制造 | HoRM陶瓷合金电阻系列选型 | 系列号  | HoRM       |
|                                                                                                |                | 修订日期 | 2022-07-05 |
|                                                                                                |                | 版本号  | Ho-A0      |

## ■ Recommend Land Pattern Design

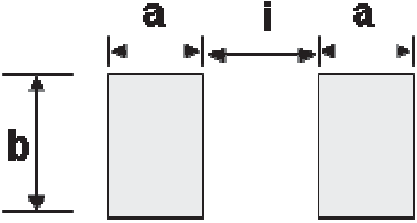

## ■ Dimension

Unit: mm

| TYPE             | Resistance Range | a    | b    | i    |
|------------------|------------------|------|------|------|
| RM2512*Z – 2W/3W | 2mΩ~20mΩ         | 2.50 | 4.50 | 3.80 |
| RM2512*G – 2W    | 1mΩ              | 3.00 | 4.50 | 1.45 |
| RM2512*G – 2W    | 2mΩ~50mΩ         | 2.50 | 4.50 | 3.80 |
| RM2512*G – 3W    | 1mΩ~50mΩ         | 2.50 | 4.50 | 3.80 |
| RM2818*Z – 5W    | 1mΩ~50mΩ         | 3.50 | 5.30 | 0.60 |

## ■ Packing Quantity

| TYPE                | PCS /Reel |
|---------------------|-----------|
| RM2512*Z-2W/3W      | 4,000     |
| RM2512*G-2W,1m~50mR | 4,000     |
| RM2512*G-3W,1m~4mR  | 3,000     |
| RM2512*G-3W,5m~50mR | 4,000     |
| RM2818-5W           | 3,500     |

地址：深圳市龙华新区观澜大布头路南通邦高新产业园 A 栋 8 楼


深圳市毫欧电子有限公司 | 电话：0755-28153546 | 传真：0755-22630181 | 网址：www.moolee.com.cn

|                                                                                               |                |      |            |
|-----------------------------------------------------------------------------------------------|----------------|------|------------|
| <br>毫欧电阻 毫欧制造 | HoRM陶瓷合金电阻系列选型 | 系列号  | HoRM       |
|                                                                                               |                | 修订日期 | 2022-07-05 |
|                                                                                               |                | 版本号  | Ho-A0      |

Appendix For SMD Chip Resistor

Packaging Information


Reel Dimensions

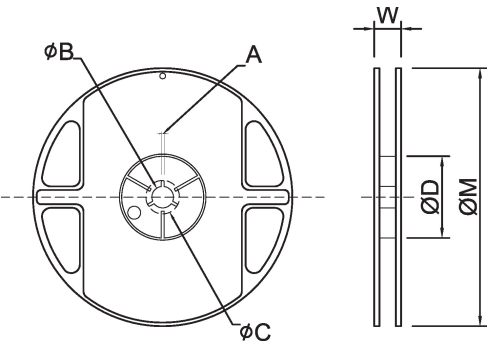

Dimension Unit: mm

| Reel Type / Tape            | A       | $\phi B$ | $\phi C$ | $\phi D$ | W        | $\phi M$ |
|-----------------------------|---------|----------|----------|----------|----------|----------|
| 7" reel for 12 mm embossed  | 2.5±0.5 | 13.5±0.5 | 17.7±0.5 | 60.0±0.5 | 16.2±0.5 | 178±1.0  |
| 13" reel for 16 mm embossed | 2.3±0.5 | 13.5±0.5 | 17.7±0.5 | 99.0±0.5 | 20.7±0.5 | 330±1.0  |

Embossed Dimensions

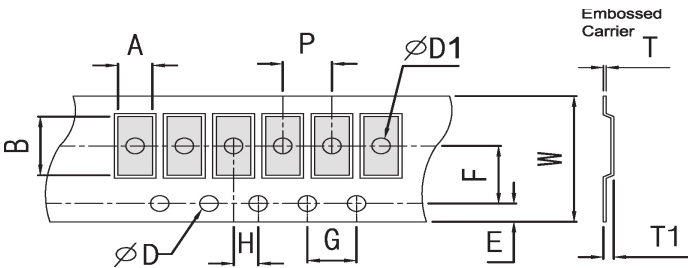

Dimension Unit: mm

| Item                  | W         | P        | E         | F        | $\phi D$                           | $\phi D1$                          | G        | H        | A         | B         | T1        | T         |
|-----------------------|-----------|----------|-----------|----------|------------------------------------|------------------------------------|----------|----------|-----------|-----------|-----------|-----------|
| RM2512                | 12.0±0.30 | 4.0±0.10 | 1.75±0.10 | 5.5±0.10 | 1.50 <sup>+0.1</sup> <sub>-0</sub> | 1.55±0.10                          | 4.0±0.10 | 2.0±0.10 | 3.50±0.10 | 6.75±0.10 | 0.90±0.20 | 0.20±0.10 |
| RM2512*G<br>3W,1m~4mR | 12.0±0.30 | 4.0±0.10 | 1.75±0.10 | 5.5±0.10 |                                    | 1.55±0.10                          | 4.0±0.10 | 2.0±0.10 | 3.50±0.10 | 6.75±0.10 | 1.30±0.20 | 0.20±0.10 |
| RM2818                | 16.0±0.30 | 8.0±0.10 | 1.75±0.10 | 7.5±0.10 |                                    | 1.50 <sup>+0.1</sup> <sub>-0</sub> | 4.0±0.10 | 2.0±0.10 | 5.21±0.10 | 7.69±0.10 | 1.97±0.10 | 0.30±0.05 |

地址：深圳市龙华新区观澜大布头路南通邦高新产业园 A 栋 8 楼

深圳市毫欧电子有限公司 | 电话：0755-28153546 | 传真：0755-22630181 | 网址：www.moolee.com.cn