


SMD QUARTZ CRYSTAL RESONATOR



4 Pad Version 1.2×1.0 mm

- ±10 ppm type available
- Excellent Reliability Performance
- EMI shielding possible by grounded lid
- Reflow soldering temperature: 260℃ max
- Ultra-small package



RoHS compliant

★ PARAMETERS

PARAMETERS	SPECIFICATION
Frequency Range	26~52MHz
Operation Mode	Fundamental
Loading Capacitance	9pF Std. 6 to 32pF / Series available
Drive Level	10 μ W (100 μ W Max)
Frequency Tolerance	±10ppm~±30ppm (at 25℃)
Equivalent Resistance	100 Ω Max at 32MHz
Frequency Stability	±10ppm~±30ppm
Operating Temp. Range:	-10~+60℃ to -40~+85℃
Storage Temp. Range:	-55~+125℃

○ All specification subject change without notice. 规格变化，恕不另行通知。

★ FREQUENCY STABILITY VS. TEMP.

Operation Temperature Range	Frequency Stability			
	±10ppm	±15ppm	±20ppm	±30ppm
-10℃~+60℃	●	○	○	○
-20℃~+70℃	○	○	●	○
-40℃~+85℃		○	○	●

● standard ○ available

★ ESR (SERIES RESISTANCE)

Frequency	Vibration Mode	ESR
26-31.99MHz	AT CUT/FUND.	150Ω(MAX)
32-39.99MHz	AT CUT/FUND.	100Ω(MAX)
40-52.00MHz	AT CUT/FUND.	60Ω(MAX)

★ DIMENSIONS& LAND PATTERN LAYOUT (Unit: mm)

		Recommended land Pattern
--	--	---------------------------------


★ PART NUMBER GUIDE

e.g. FTX32.000M9SM1A-10/10B (*SM1A=1.2×1.0 SMD SEAM TYPE)

Logo	Quartz Crystal Resonator	Frequency Hz	Load Capacitance pF	Package	Frequency Tolerance ppm	Frequency Stability ppm	Operating Temp. Range
FT	X	32.000M	9	SM1A	10	10	B


Definition	Description
Operating Temperature Range	A: -10~+60℃
	B: -20~+70℃
	C: -30~+80℃
	D: -40~+85℃
	E: Customer specified

★ TAPING SPECIFICATION (Unit: mm)

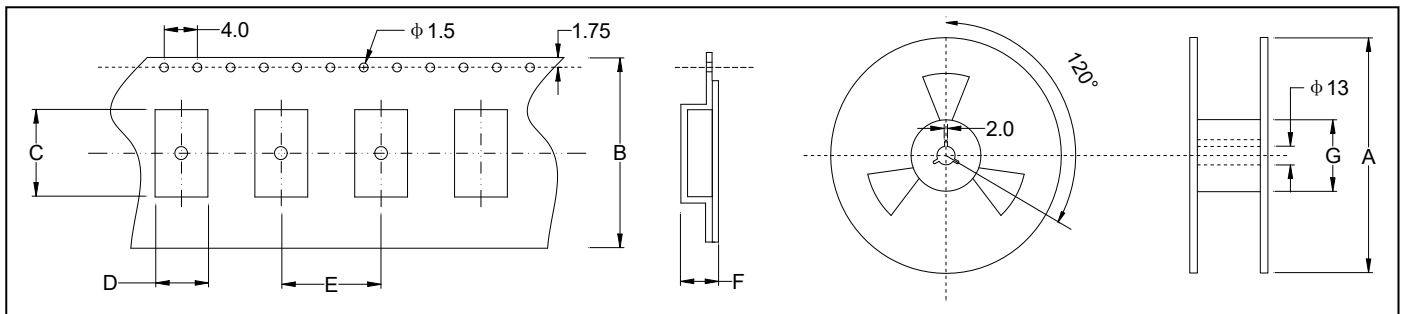

	A	B	C	D	E	F	G
SMD1210	178 ± 2.0	8.0 ± 0.3	1.5 ± 0.05	1.3 ± 0.05	4.0 ± 0.1	0.45 ± 0.05	60 ± 1.0
3000 pcs per reel							

★ REFLOW SOLDERING PROFILE

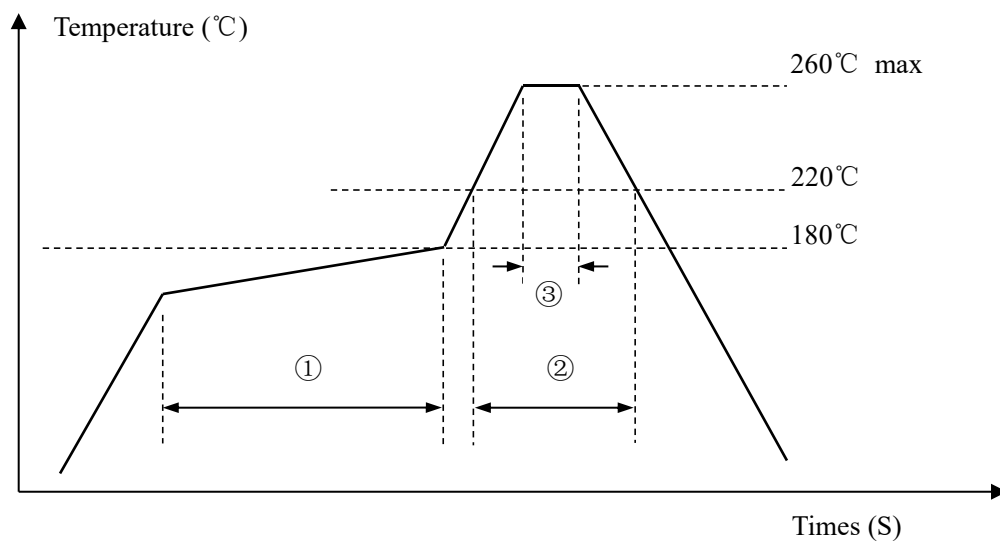

Pb free reflow A	①	Preheat	160~180℃	120sec. max
	②	Primary heat	220℃	60sec. max
	③	Peak	260℃	10sec. max.