

DIP QUARTZ CRYSTAL RESONATOR



DIP Tuning Fork 3.0×8.0 mm

- Tuning fork crystal in 3 x 8 mm cylinder type
- 32.768 KHz standard
- ±20 ppm Standard
- Excellent Reliability Performance




RoHS compliant

★ PARAMETERS

PARAMETERS	SPECIFICATION
Frequency Range	32.768KHz (30.00~ 200.00 KHz available)
Loading Capacitance	12.5pF Std. 6 pF~20pF available
Drive Level	1.0 μ W Max
Frequency Tolerance	±5ppm / ±10ppm / ±20ppm (at 25℃)
Equivalent Resistance	30K Ω Max
Temperature coefficient	-0.04×10 ⁻⁶ /℃ ² max, -0.034×10 ⁻⁶ /℃ ² typical
Operating Temp. Range:	-20~+70℃ / -40~+85℃
Storage Temp. Range:	-40~+85℃
Aging (25℃, First Year)	±5ppm max

○ All specification subject change without notice.

★ DIMENSIONS& LAND PATTERN LAYOUT (Unit: mm)

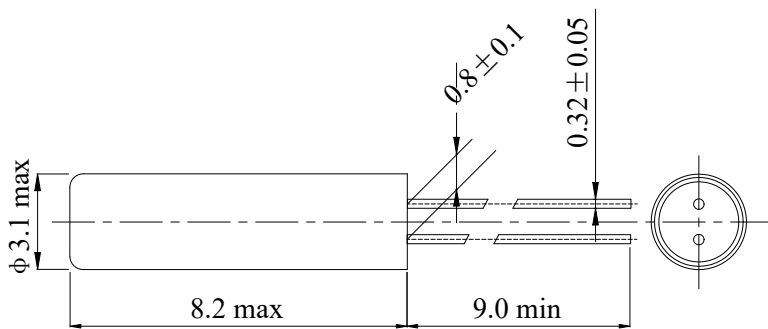

★ Frequency Stability vs. Temperature

Operating Temperature Range	Frequency Stability	
	-80ppm	-160ppm
-10℃~+60℃	●	
-20℃~+70℃		●


● standard ○ available

● Mounting of cylinder type products:

Soldering the body of the cylinder type crystal units with PCB must be avoided due to deteriorate the characteristics or damage the products. Rubber adhesive is recommended.

● Soldering

Lead wires should be soldered within 3 seconds with the soldering iron heated to a temperature no higher than 300℃

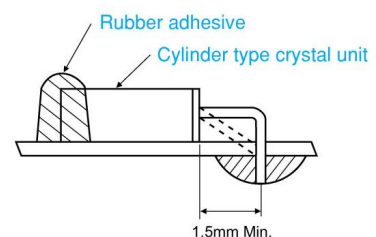

★ PART NUMBER GUIDE *e.g. FTX32.768K12.5D8-20D (*D8=3.0×8.0mm)*

	Quartz Crystal Resonator	Frequency	Load Capacitance	Package	Frequency Tolerance ppm	Operating Temp. Range
FT	X	32.768KHz	12.5	D8	20	D

Definition	Description
Operating Temperature Range	A: -10~+60℃
	B: -20~+70℃
	C: -30~+80℃
	D: -40~+85℃
	E: Customer specified

★ WAVE SOLDERING PROFILE

