


SMD QUARTZ CRYSTAL RESONATOR



2 Pad Version 5.0×3.2 mm

- ±10 ppm type available
- Excellent Reliability Performance
- Reflow soldering temperature: 260℃ max
- Ceramic Seam Weld package

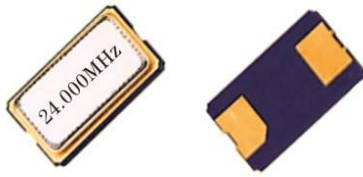

RoHS compliant

★ PARAMETERS

PARAMETERS	SPECIFICATION
Frequency Range	8~50MHz
Operation Mode	Fundamental
Loading Capacitance	20pF Std. 8 to 32pF Series available
Drive Level	100 μ W (300 μ W Max)
Frequency Tolerance	±10ppm~±30ppm (at 25℃)
Equivalent Resistance	100 Ω Max
Frequency Stability	±10ppm~±50ppm
Operating Temp. Range:	-10~+60℃ to -40~+85℃
Storage Temp. Range:	-55~+125℃

○ All specification subject change without notice.

★ FREQUENCY STABILITY VS. TEMPERATURE


Operation Temperature Range	Frequency Stability					
	±5ppm	±10ppm	±15ppm	±20ppm	±30ppm	±50ppm
-10℃~+60℃		●	○	●	○	○
-20℃~+70℃		○	○	●	○	○
-40℃~+85℃				○	●	○

● standard ○ available

★ ESR (SERIES RESISTANCE RS)

Frequency	Vibration Mode	ESR
8-9.999MHz	AT CUT/FUND.	100Ω(MAX)
10-11.999MHz	AT CUT/FUND.	60Ω(MAX)
12-15.999MHz	AT CUT/FUND.	50Ω(MAX)
16-24.999MHz	AT CUT/FUND.	40Ω(MAX)
25-50.000MHz	AT CUT/FUND.	30Ω(MAX)

★ DIMENSIONS& LAND PATTERN LAYOUT (Unit: mm)

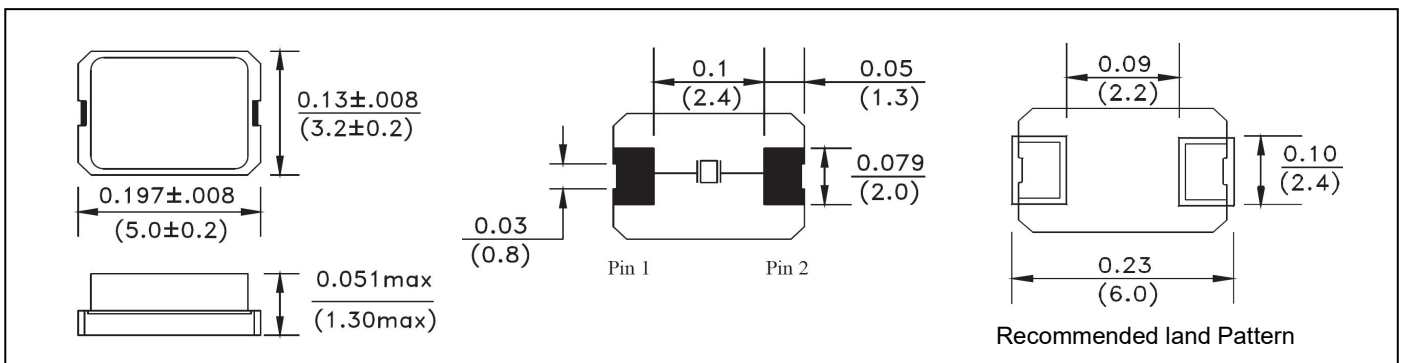

Recommended land Pattern


★ PART NUMBER GUIDE

e.g. FTX12.000M20SM5A-30/30B (*SM5A=5.0×3.2 SMD SEAM 2PAD TYPE)

Logo	Quartz Crystal Resonator	Frequency Hz	Load Capacitance pF	Package	Frequency Tolerance ppm	Frequency Stability ppm	Operating Temp. Range
FT	X	12.000M	20	SM5A	30	30	B


Definition	Description
Operating Temperature Range	A: -10~+60℃
	B: -20~+70℃
	C: -30~+80℃
	D: -40~+85℃
	E: Customer specified

★ TAPING SPECIFICATION (Unit: mm)

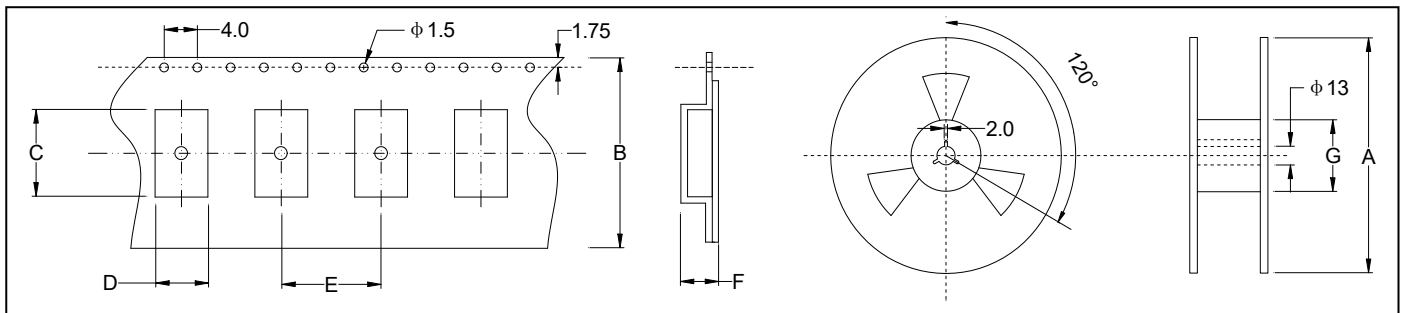

	A	B	C	D	E	F	G
SMD5032-2pad	178 ± 2.0	12.0 ± 0.3	5.40 ± 0.10	3.60 ± 0.10	8.0 ± 0.1	1.1 ± 0.1	60.5 ± 1.0
1000 pcs per reel							

★ REFLOW SOLDERING PROFILE

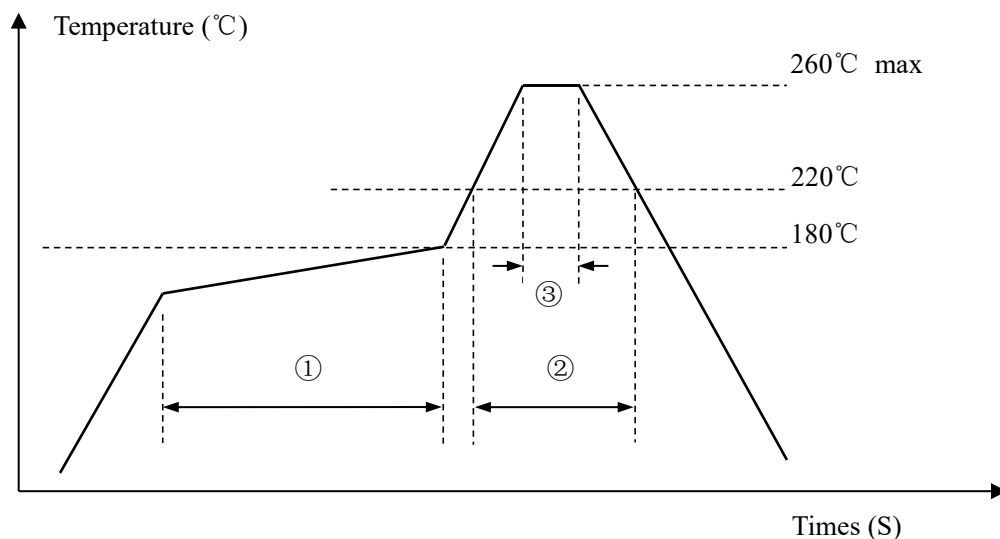

Pb free reflow A	①	Preheat	160~180℃	120sec. max
	②	Primary heat	220℃	60sec. max
	③	Peak	260℃	10sec. max.