


SMD QUARTZ CRYSTAL OSCILLATOR



4 Pad Version 2.0×1.6 mm

- ±20 ppm type available
- Excellent Reliability Performance
- EMI shielding possible by grounded lid
- Reflow soldering temperature: 260℃ max
- Ceramic Seam Weld package

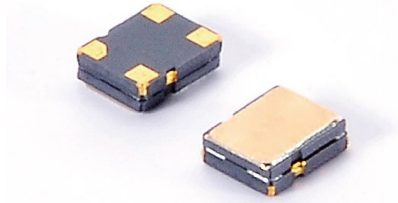

RoHS compliant

★ PARAMETERS

PARAMETERS	SPECIFICATION
Frequency Range	1.5~50MHz
Supply voltage	1.8V、2.5V、2.8V、3.3V
Input Current	See Below
Frequency Stability Overall	±20ppm~±50ppm
Operating Temp. Range	-10~+60℃ to -40~+85℃
Storage Temp. Range	-55~+125℃
Output Load	HCMOS/TTL (15pF~30pF/10TTL)
Symmetry	45% ~ 55% typ. (40% ~ 60% max.) at 0.5×Vdc
Start-up time	10mS max
Enable/ Disable Function	O/E or E/D

○ All specification subject change without notice.

★ FREQUENCY STABILITY VS. TEMPERATURE


Operation Temperature Range	Frequency Stability			
	±20ppm	±25ppm	±30ppm	±50ppm
-10℃~+60℃	○	●	○	○
-20℃~+70℃		○	●	○
-40℃~+85℃				●

● standard ○ available

★ Rise & Fall TIME MAX.

Frequency	Rise & Fall Time	V _{DC}	Rise & Fall Time	V _{DC}
1.5~9.9 MHz	4nS max	3.3V	5nS max	1.8V
10.0~19.9 MHz	4nS max		5nS max	
20.0~31.9 MHz	3nS max		4nS max	
32.0~50 MHz	3nS max		4nS max	

★ DIMENSIONS& LAND PATTERN LAYOUT (Unit: mm)

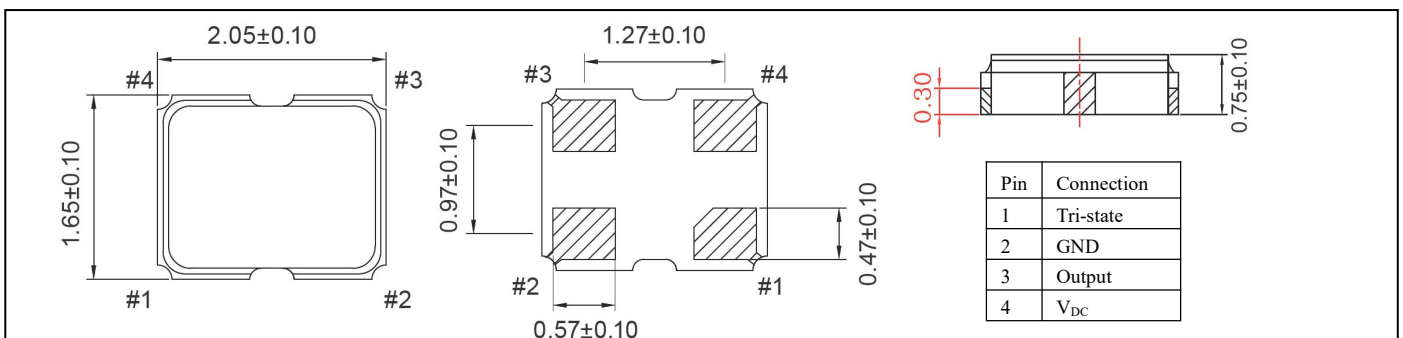

★ PART NUMBER GUIDE

e.g. FXO12.000M3.3SM2A-50D (*SM2A=2.0×1.6 SMD TYPE)


Logo	Quartz Crystal Oscillator	Frequency Hz	Supply voltage V	Package	Frequency Stability ppm	Operating Temp. Range
F	XO	12.000M	3.3	SM2A	50	D

Definition	Description
Operating Temperature Range	A: -10~+60℃
	B: -20~+70℃
	C: -30~+85℃
	D: -40~+85℃
	E: Customer specified

★ INPUT CURRENT

Vdc=3.3V		Vdc=2.5V		Vdc=1.8V	
1.5 ~ 9.9 MHz	7 mA	1.5 ~ 9.9 MHz	6 mA	1.5 ~ 9.9 MHz	4 mA
10.0 ~ 19.9 MHz	7 mA	10.0 ~ 19.9 MHz	6 mA	10.0 ~ 19.9 MHz	4 mA
20.0 ~ 31.9 MHz	10 mA	20.0 ~ 31.9 MHz	8 mA	20.0 ~ 31.9 MHz	5 mA
32.0 ~ 50.0 MHz	15 mA	32.0 ~ 50.0 MHz	10 mA	32.0 ~ 50.0 MHz	7 mA

★ TAPING SPECIFICATION (Unit: mm)

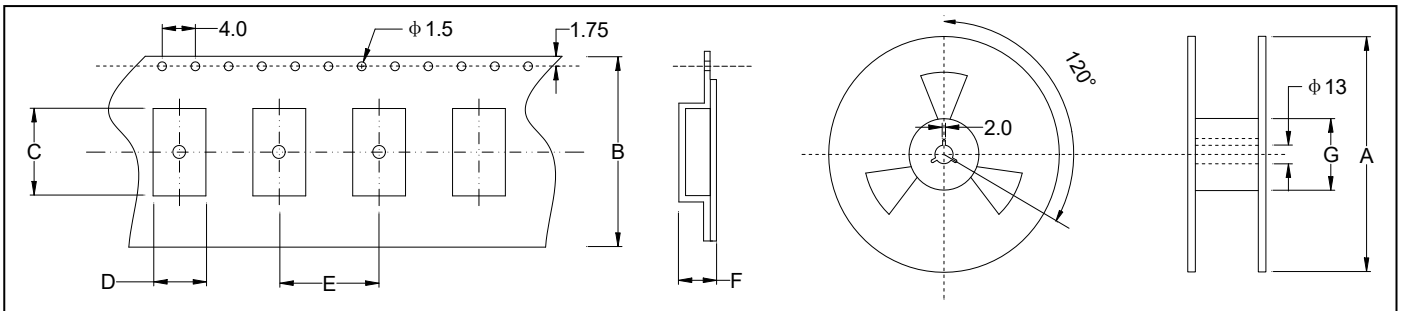

	A	B	C	D	E	F	G
OSC-SMD2016	180±2.0	8.0±0.3	2.25±0.10	1.85±0.10	4.0±0.1	0.95±0.1	60.5±1.0
3000 pcs per reel							

★ REFLOW SOLDERING PROFILE

