



T12*6*4 Specification document


1. OUTLINE DIMENSION: (UNIT:mm)

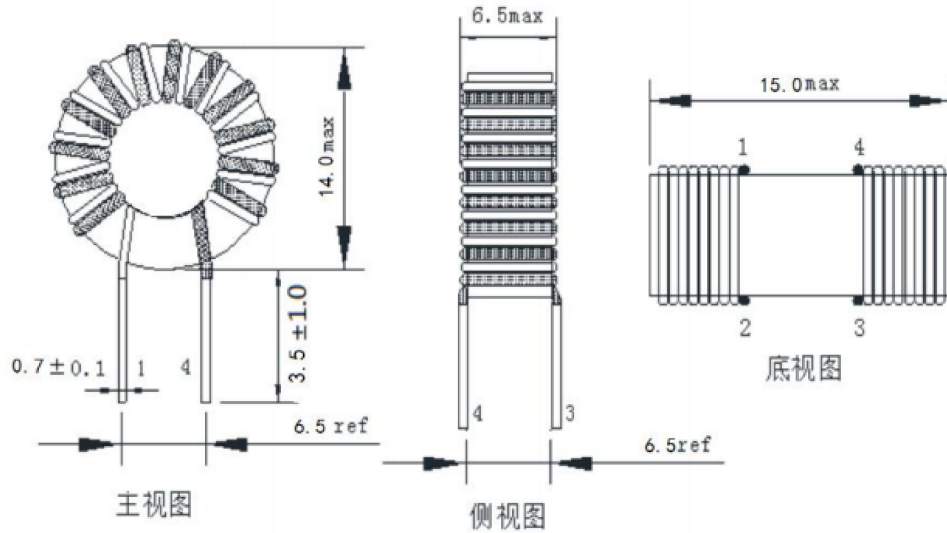

2. SCHEMATIC:



3. WINDING CONSTRUCTION:



4. WINDING CONSTRUCTION:

Process	Barricade tape		Phase	Wire diameter /number of	Number of turns	Tape 16.5mm	Insulating sleeve		Remark
	PIN	TOP					Starting	ending	
N1			1--4	0.70mm*1 C (2UEW-	10.5TS REF				Double-winding
N2			2--3	0.70mm*1 C (2UEW-	10.5TS REF				

5. ELECTRICAL CHARACTERISTICS: (Temperature:25°C±5°C ;Humidity:65±25%)

1). Inductance:: L (1--4/2--3):1mH min (1KHz, 0.30V 30 Ω , According to the sensitivity, the number of turns can be adjusted.)

2). Hi-Pot Test:AC50/60Hz (CS2670AX)

COIL TO CORE. 500VAC/5mA/3S

6. Material List

Number	Name	Specification and Material	Certification	Temperature characteristics
1	磁芯	T1264	N/A	
2	铜线	xUEW/155, QA-x/155	E239508	155°C
3	凡立水	E962	E335405	130°C
4	锡条	锡/铜	N/A	