



DR6*12 Specification document

1. OUTLINE DIMENSION: (UNIT:mm)

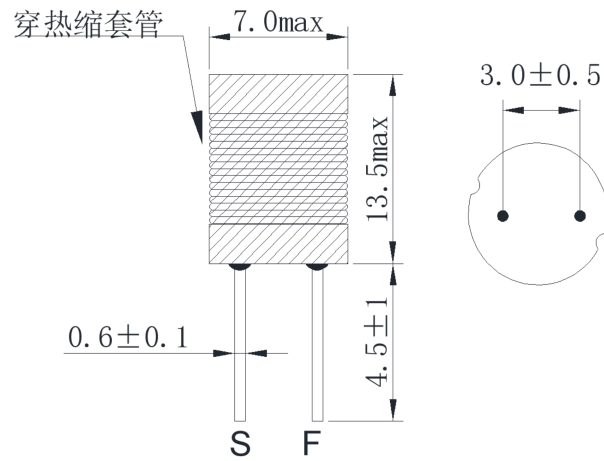

2. SCHEMATIC:



3. WINDING CONSTRUCTION:

4. WINDING CONSTRUCTION:

Process	Barricade tape		Phase	Wire diameter/number of strands	Number of turns	Tape	Insulating sleeve		Remark
	PIN	TOP					Starting	ending	
N1	/	/	S--F	0.20mm*1C(2UEW)	30.0TS	/	/	/	

5. ELECTRICAL CHARACTERISTICS: (Temperature:25 °C ±5°C ;Humidity:65 ±25%)				
1). Inductance:: L (S--F) :1120uH ±15% (1KHz, 0. 30V)				
Lk (3-1) : 70uH MAX (10KHz, 0. 25V)				
3). Hi-Pot Test:AC50/60Hz (CS2670AX)				
6. Material List				
Number	Name	Specification and Material	Certification	Temperature characteristics
1	Magnetic core	DR6*12	N/A	
2	Copper wire	xUEW/155, QA-x/155	E239508	155℃
3	Tin bar	Tin/Copper	N/A	
4	Fanlishui	E962	E335405	130℃