



T050125 Specification document

1. OUTLINE DIMENSION: (UNIT:mm)

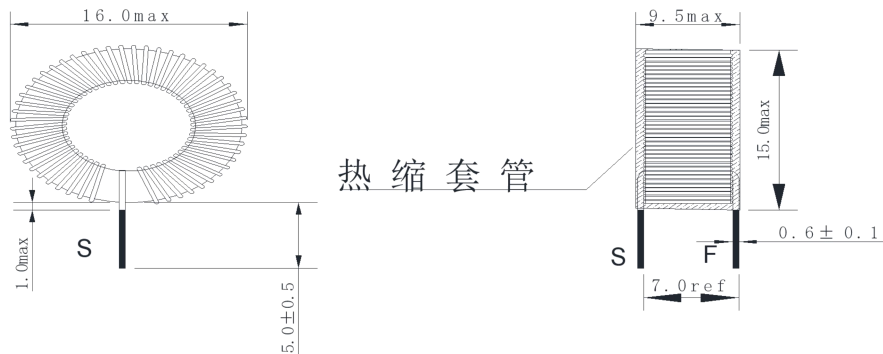

2. SCHEMATIC:



3. WINDING CONSTRUCTION:



4. WINDING CONSTRUCTION:

Process	Barricade tape		Phase	Wire diameter /number of	Number of turns	Tape	Insulating sleeve		Remark
	PIN1-2	PIN3-4					Starting	ending	
N1			S--F	0.6mm*1C (xUEW)	53.5TS REF				

5. ELECTRICAL CHARACTERISTICS: (Temperature:25°C ± 5°C ;Humidity:65±25%)

1). Inductance:: L (S--F) :200uH±20% (10KHz, 0.30V)

2). Hi-Pot Test:AC50/60Hz (CS2670AX)

COIL TO CORE. 500VAC/5mA/3S

6. Material List

Number	Name	Specification and Material	Certification	Temperature characteristics
1	Magnetic core	T050-125 Iron silicon aluminum	N/A	
2	Copper wire	xUEW/155, QA-x/155	E239508	155°C

3	Fanlishui	E962	E335405	130℃
4	Tin bar	Tin/Copper	N/A	