



T044125 Specification document

1. OUTLINE DIMENSION: (UNIT:mm)

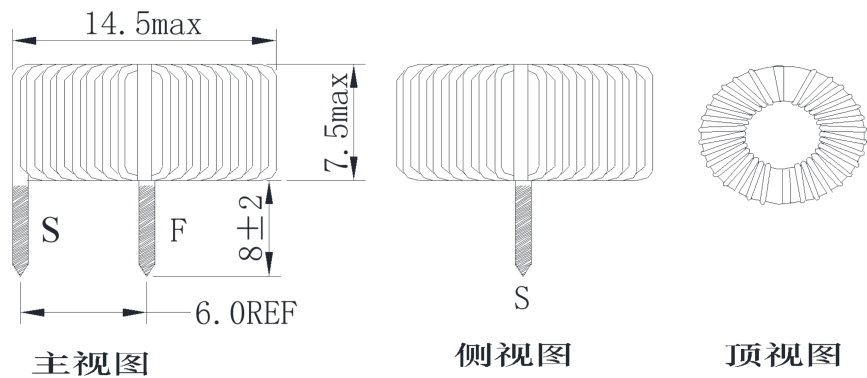

2. SCHEMATIC:

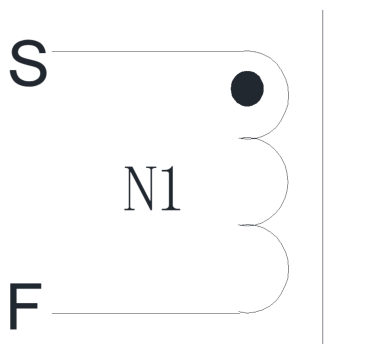

3. WINDING CONSTRUCTION:

4. WINDING CONSTRUCTION:

Process	Barricade tape		Phase	Wire diameter/number of strands	Number of turns	Tape	Insulating sleeve		Remark
	PIN1-2	PIN3-4					Starting	ending	
N1			S--F	0.7mm*1C(xUEW)	25.5TS REF				

5. ELECTRICAL CHARACTERISTICS: (Temperature:25℃±5℃;Humidity:65±25%)

1). Inductance:: L (S--F) :48uH±15% (1KHz, 0.30V)

2). Hi-Pot Test:AC50/60Hz (CS2670AX)

COIL TO CORE. 500VAC/5mA/3S

6. Material List

Number	Name	Specification and Material	Certification	Temperature characteristics
1	Magnetic core	044125	N/A	

2	Copper wire	xUEW/155, QA-x/155	E239508	155℃
3	Fanlishui	E962	E335405	130℃
4	Tin bar	Tin/Copper	N/A	

