



T22148 Specification document

1. OUTLINE DIMENSION: (UNIT:mm)

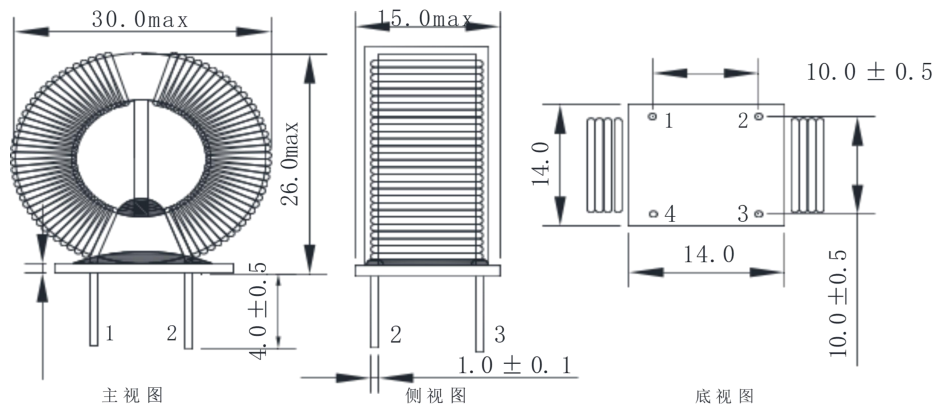

2. SCHEMATIC:

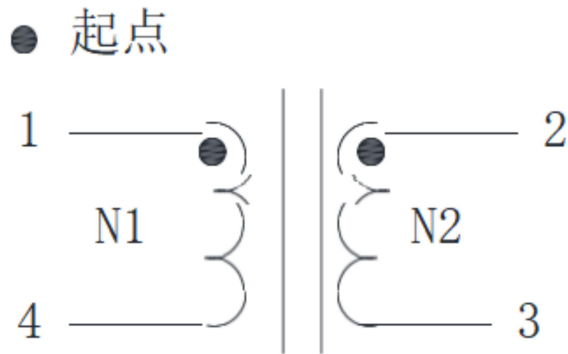

3. CONSTRUCTION DIAGRAM:

4. WINDING CONSTRUCTION:

Process	Barricade tape		Phase	Wire diameter /number of	Number of turns	Tape	Insulating sleeve		Remark
	PIN	TOP					Starting	ending	
N1	/	/	1--4	1.0mm*1C (2UEW)	30TS REF	/	/	/	Tightly wrapped
N2	/	/	2--3	1.0mm*1C (2UEW)	30TS REF	/	/	/	Tightly wrapped

5. ELECTRICAL CHARACTERISTICS: (Temperature:25℃±5℃ ;Humidity:65±25%)

1). Inductance:: L (1-4/2--3) : 7mH MIN (1KHz, 0.25V)

2). Hi-Pot Test:AC50/60Hz (CS2670AX)

PRI.TO SEC. 500VAC/1mA/60S

PRI.SEC TO CORE. 500VAC/1mA/60S

6. Material List				
Number	Name	Specification and Material	Certification	Temperature characteristics
1	Magnetic core	T22*14*8CR12K	N/A	
2	Copper wire	2UEW	E239508	155℃
3	Insulating paint	T1148-1	E235951	130℃
4	Tin bar	Tin/Copper	N/A	