



T20107 Specification document

1. OUTLINE DIMENSION: (UNIT:mm)

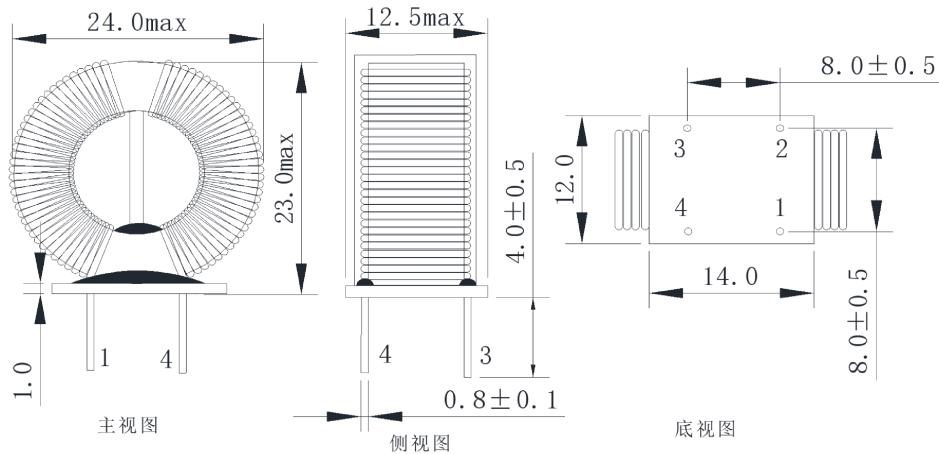

2. SCHEMATIC:

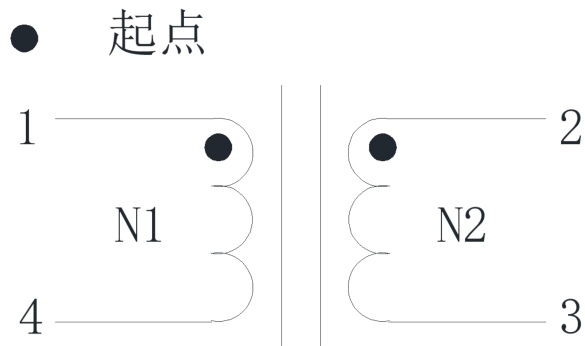

3. WINDING CONSTRUCTION:

4. WINDING CONSTRUCTION:

Process	Barricade tape		Phase	Wire diameter /number of	Number of turns	Tape	Insulating sleeve		Remark
	PIN	TOP					Starting	ending	
N1	/	/	1--4	8mm*1C(2U)	22TS REF	/	/	/	Tightly wrapped
N2	/	/	2--3	8mm*1C(2U)	22TS REF	/	/	/	Tightly wrapped

5. ELECTRICAL CHARACTERISTICS: (Temperature:25℃±5℃;Humidity:65±25%)				
1). Inductance:: L (1-4/2--3) : 5mH MIN (1KHz, 0. 25V)				
2). Hi-Pot Test:AC50/60Hz (CS2670AX)				
PRI.TO SEC. 500VAC/1mA/60S				
PRI.SEC TO CORE. 500VAC/1mA/60S				
6. Material List				
Number	Name	Specification and Material	Certification	Temperature characteristics
1	Magnetic core	TT20*10*7	N/A	
2	Copper wire	2UEW	E239508	155℃
3	Insulated wire	T1148-1	E235951	130℃
4	Tin bar	Sn/Cu	N/A	