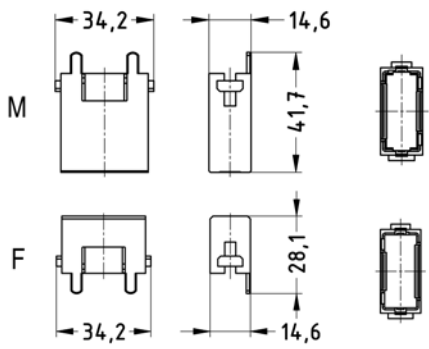
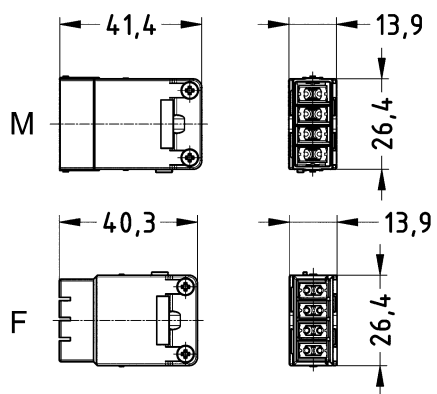
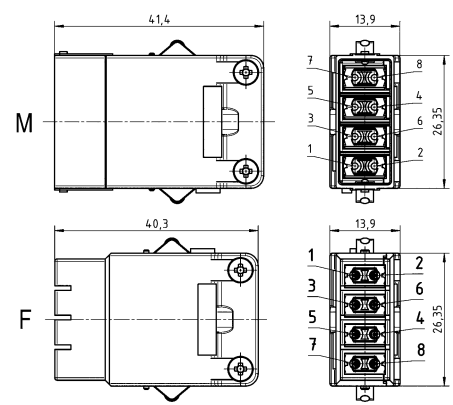


Number of contacts

8

5 A 50 V 0.8 kV 3
+ shielding

Modu-
lar

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Adapter module, Han® Gigabit module, Han® Shielded module, Han® Megabit module 		09 14 001 3011	09 14 001 3111	
Han® Gigabit insert, Crimp termination, Cat. 6A  Please order crimp contacts separately. Please order adapter module separately. Please order cable clamp or crimp flange separately.	0.09 ... 0.52	09 14 008 3011	09 14 008 3111	 Cable outer diameter ≤ 14 mm
Han® Gigabit insert, Crimp termination, Cat. 6A  With additional shield connection to the hinged frame Please order crimp contacts separately. Please order adapter module separately.	0.09 ... 0.52	09 14 008 3012	09 14 008 3112	 Cable outer diameter ≤ 14 mm