

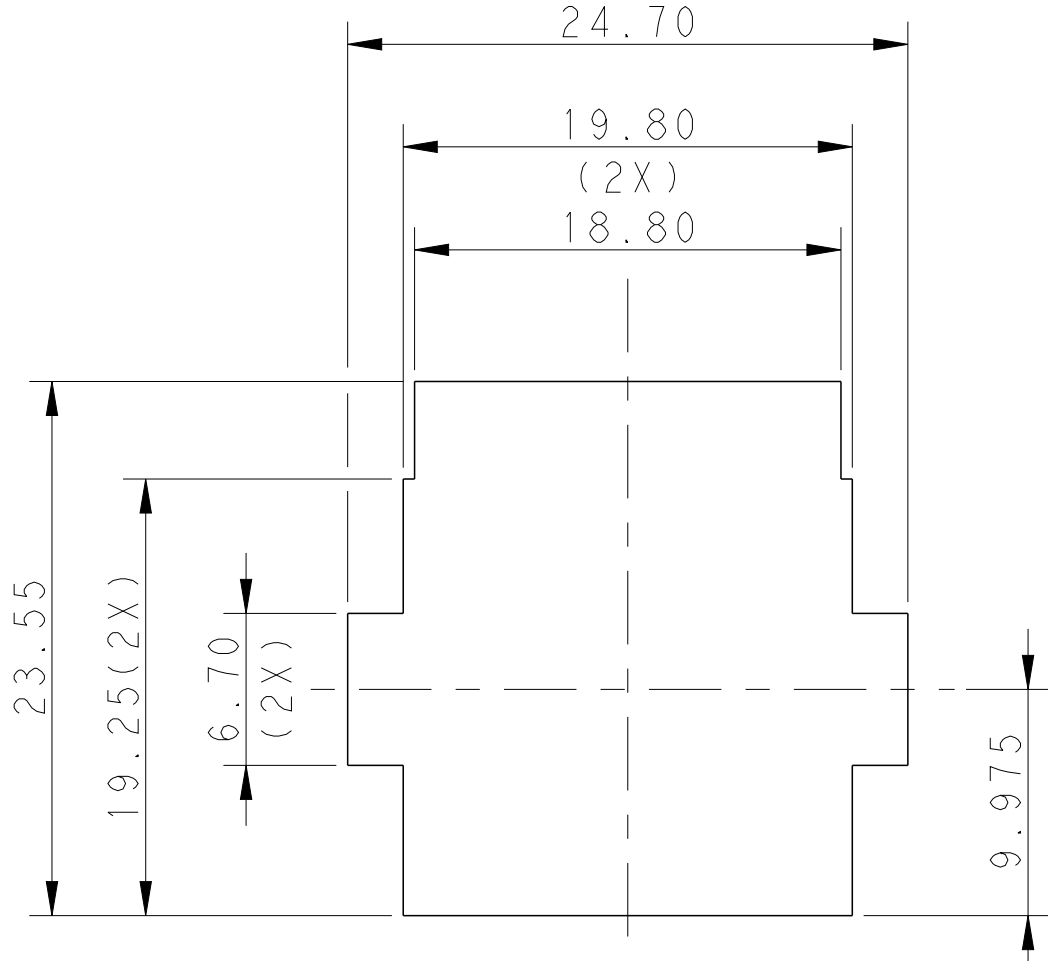
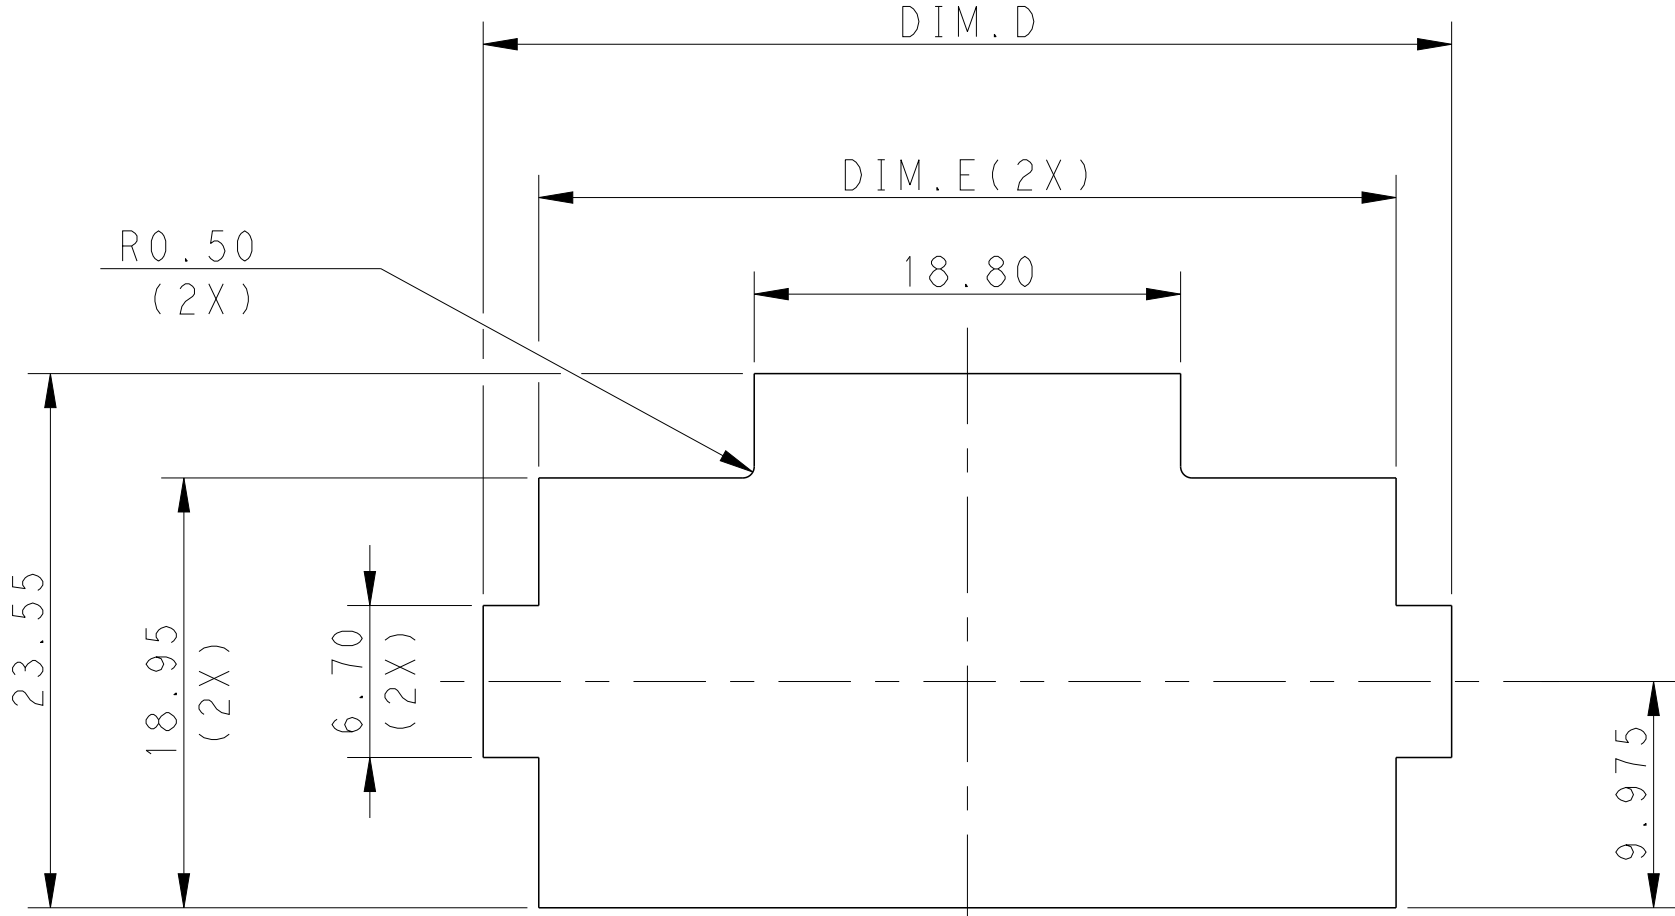
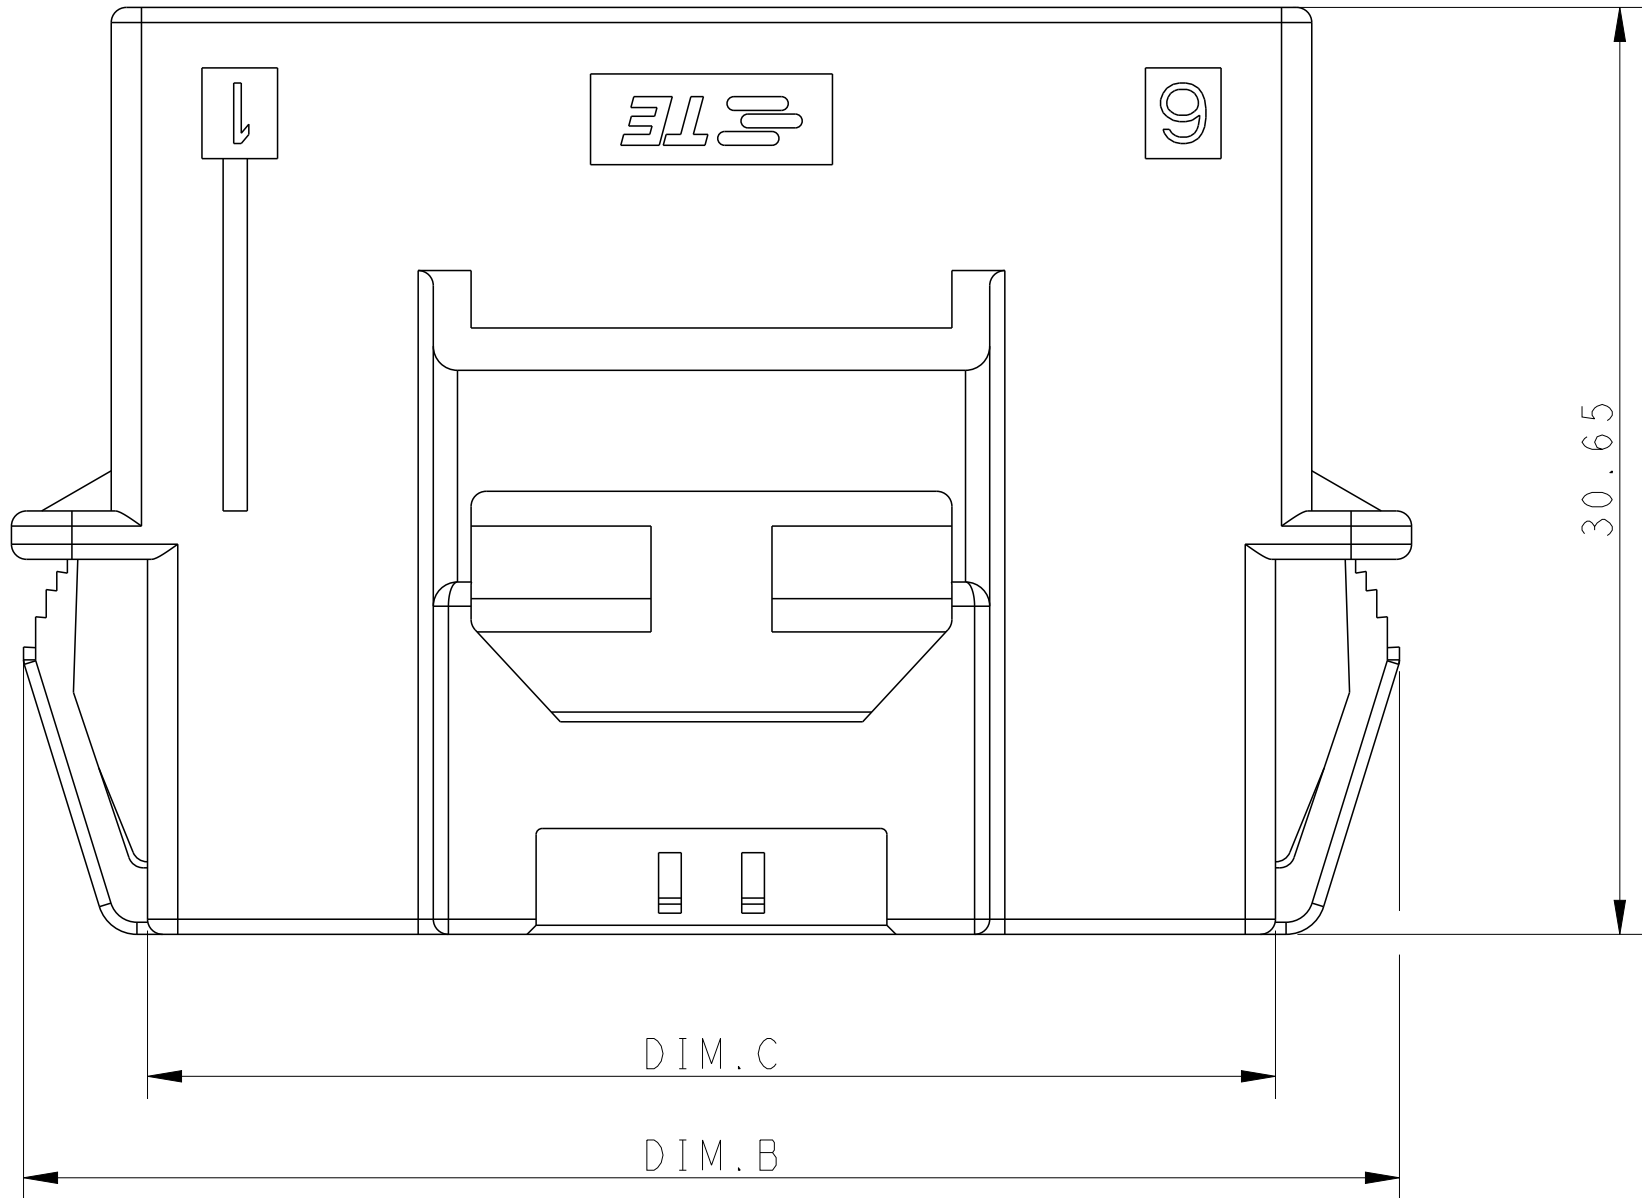
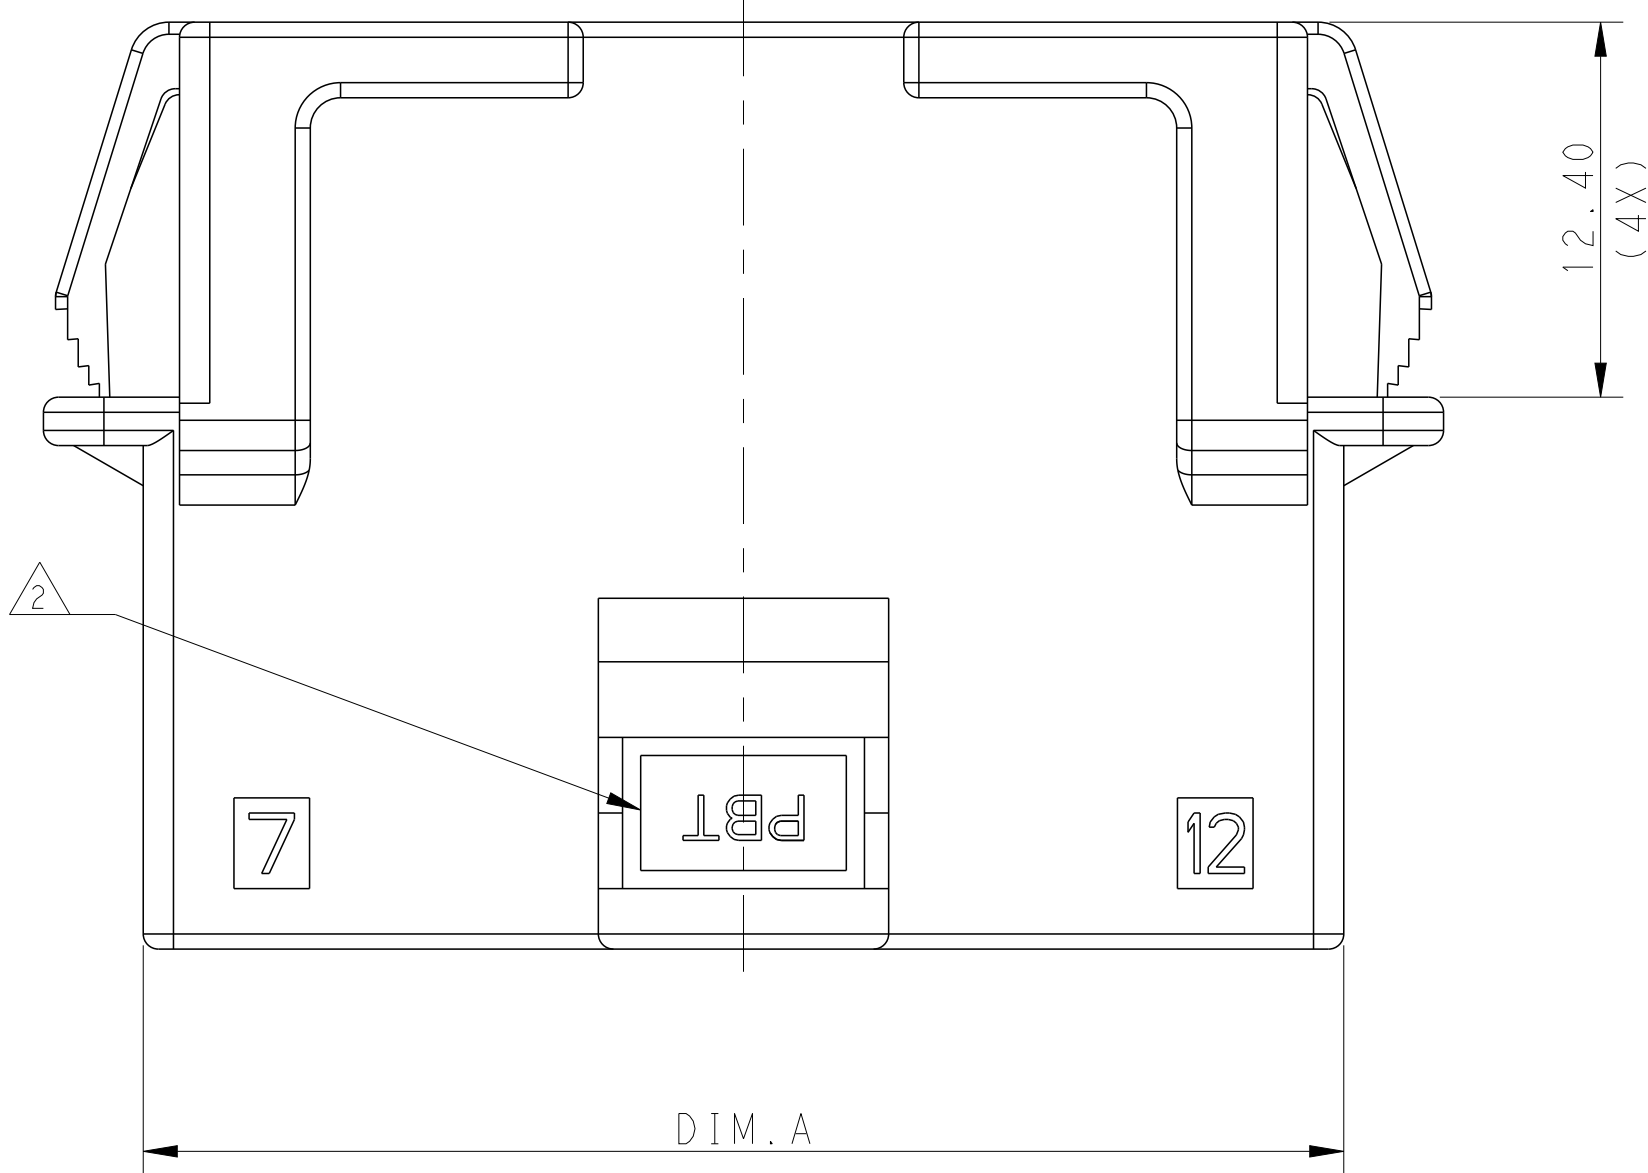
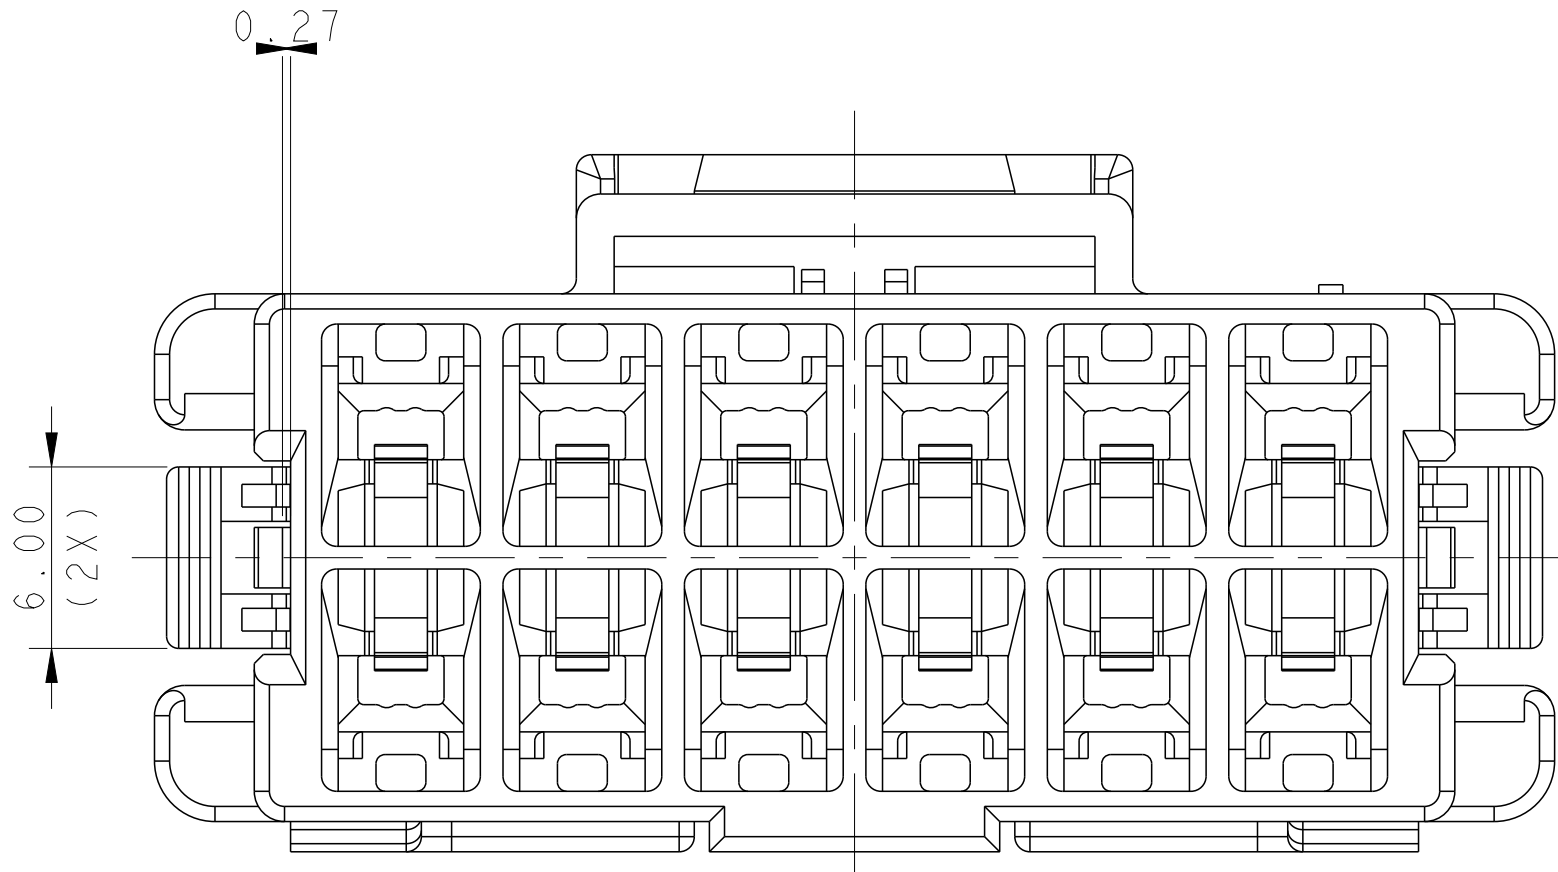


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
E		REVISED PER ECR-21-10067	08APR2021	SS	VS
F		REVISED PER ECR-20-100915	28APR2021	JP	VS
G		REVISED PER ECR-22-130081	12OCT2022	SKR	DS

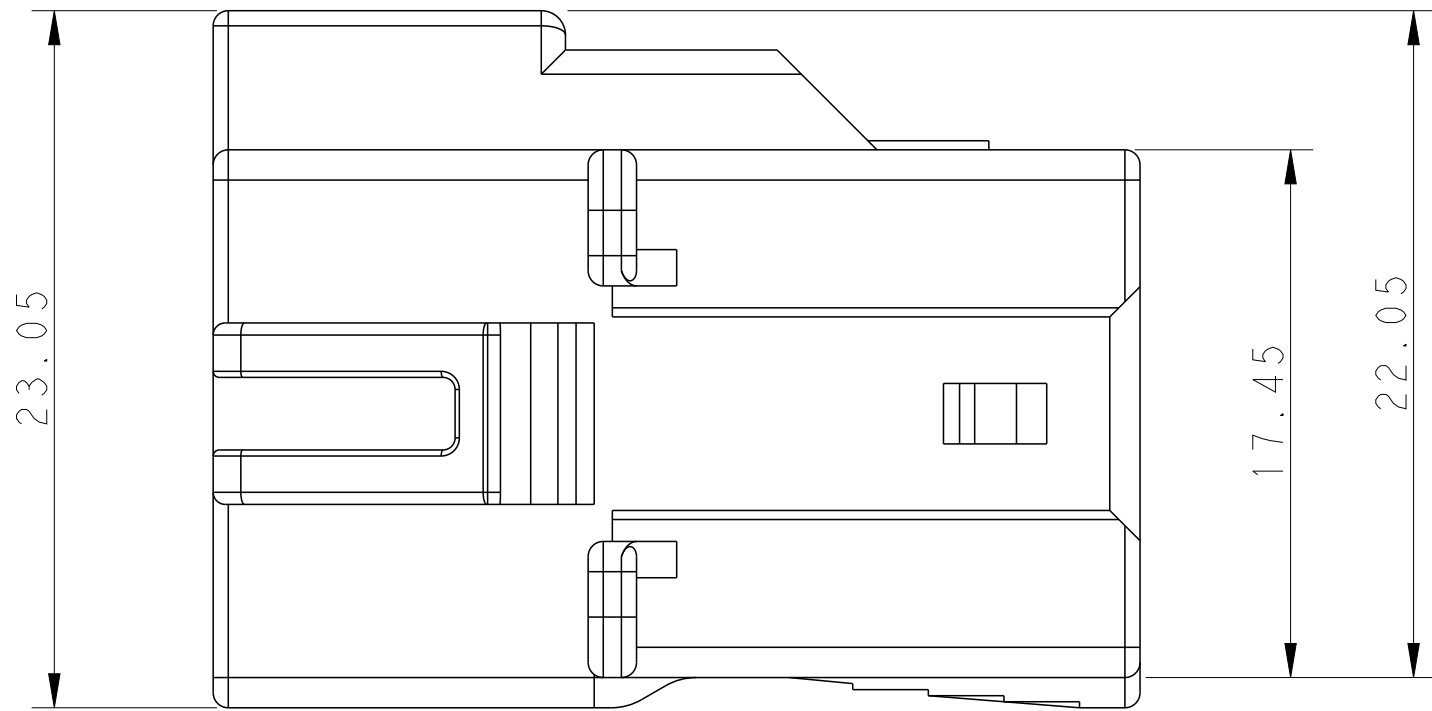

RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 2*6 AND 2*5 AND 2*4 POSITIONS
(TOLERANCE: ±0.15mm)

RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 2*3 POSITION
(TOLERANCE: ±0.15mm)

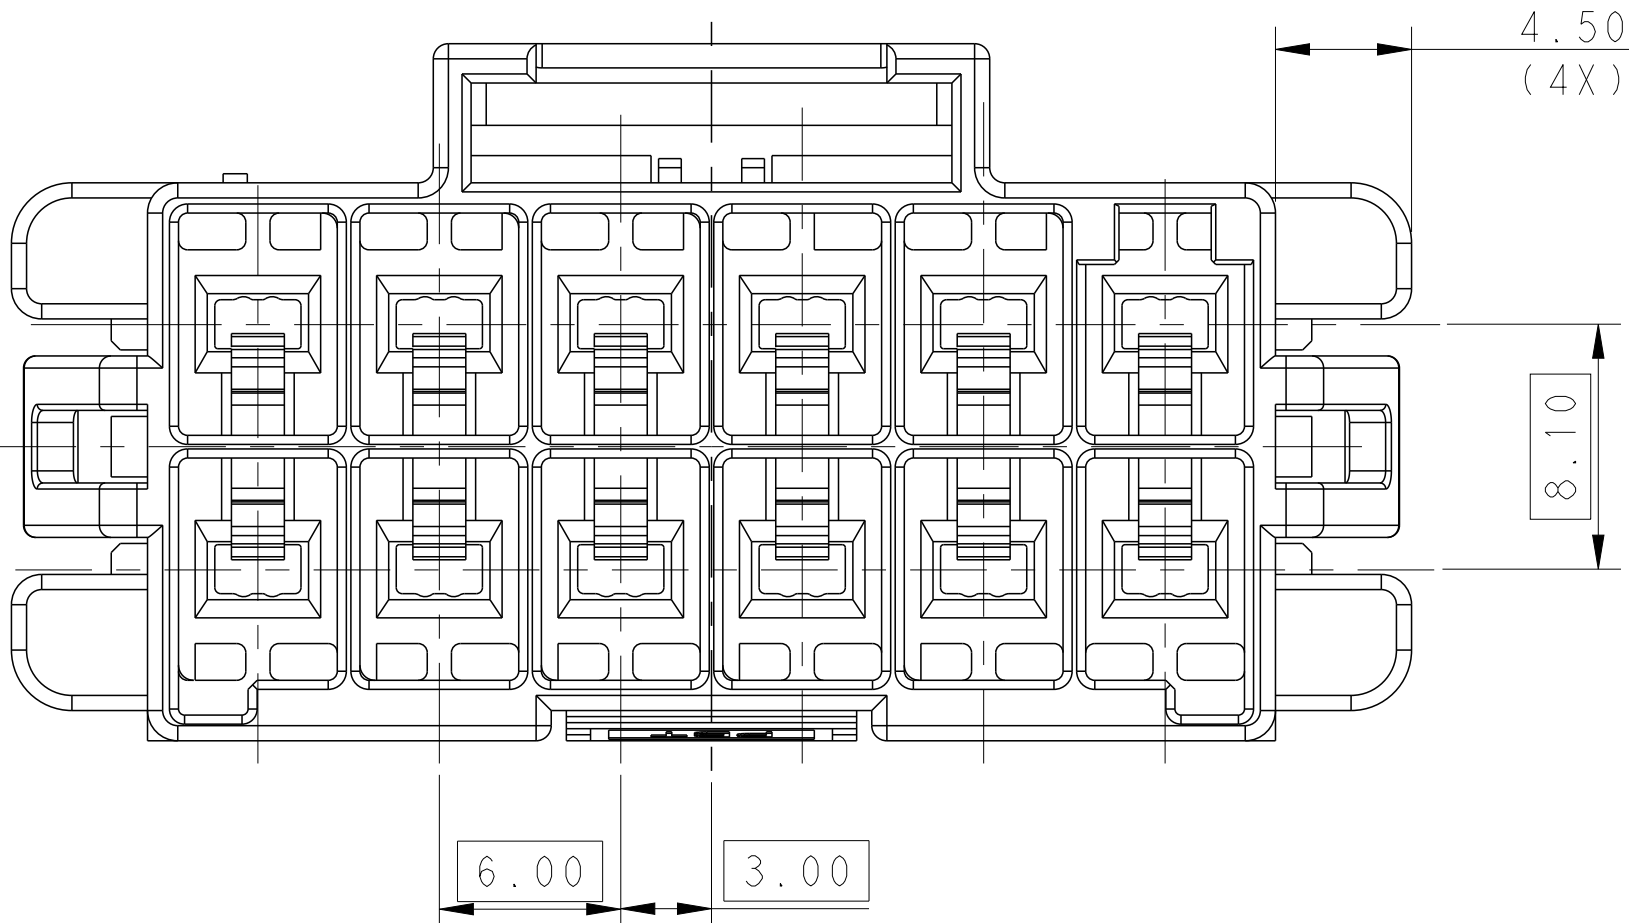

- ⚠ MATERIAL:
LEVEL 1: PBT, STANDARD TEMPERATURE 105°C
KEY A:NATRUAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW

LEVEL 2: PA66, HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL

- ⚠ MATERIAL MARK:
LEVEL 1:PBT, LEVEL 2:HDT



3. APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*
4. MATING CONN, P/N
PLUG HSG: *-1971776-
TPA(LOCK PLATE): *-1971778-*
5. RECOMMENDED PANEL THICKNESS:1.0-2.0mm

- ⚠ GLOW WIRE COMPLIANT IN ACCORDANCE WITH IEC 60335-1. THIS IS
BASED ON THE PRODUCT MEETING A GWEPT 850°C TEST AND RESIN GWIT
GREATER THAN OR EQUAL TO 775°C.





POS	A	B	C	D	E
2*6	39.70	45.5	37.30	42.70	37.80
2*5	33.70	39.5	31.30	36.70	31.80
2*4	27.70	33.5	25.30	30.70	25.80
2*3	21.70	27.5	19.30		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY_WU		06JUL2012		 TE Connectivity	
		CHK	HAPYE_WU		06JUL2012			
DIMENSIONS:		APVD	YUHONG_MAO		06JUL2012		NAME	
mm		PRODUCT SPEC						
		108-106118					SIZE	
		APPLICATION SPEC						
		114-106118						
		FINISH						
MATERIAL		WEIGHT					CAGE CODE	
							DRAWING NO	
		Customer Drawing					RESTRICTED TO	
							A100779C-1971775	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	
							-	



LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION			DATE	OWN	APVD
-	-	SEE SHEET 1			-	-	-

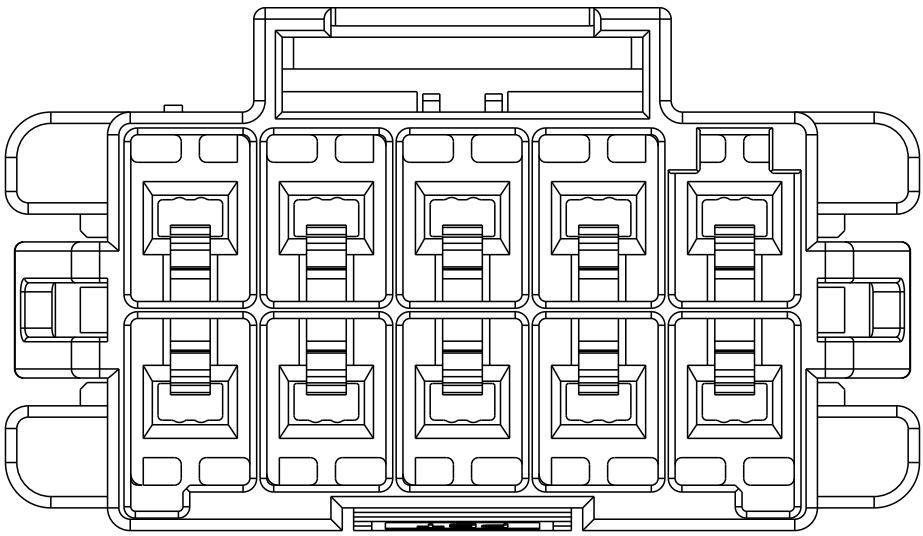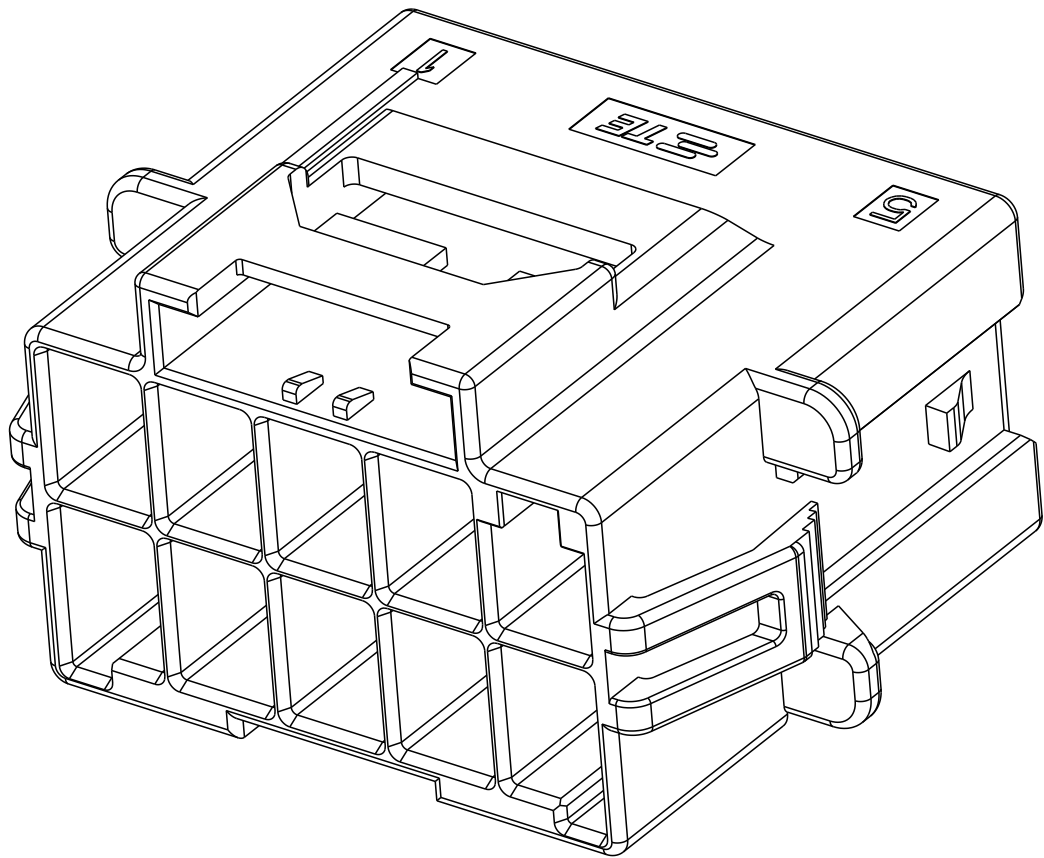





2*5 POSITIONS

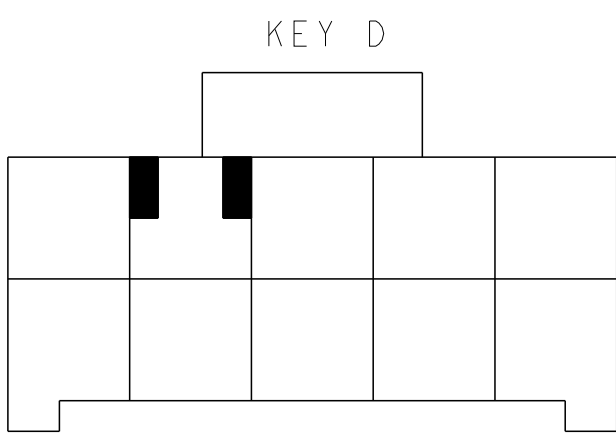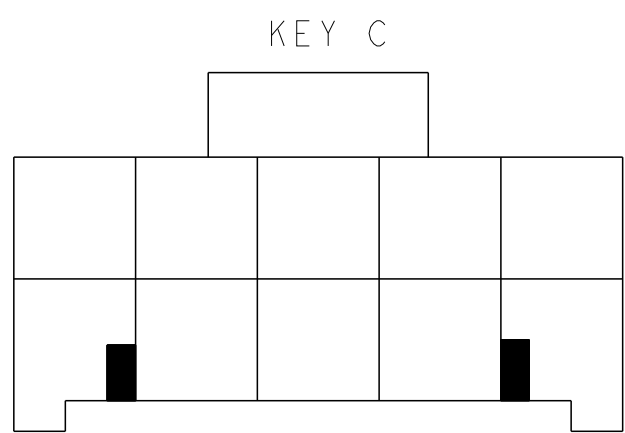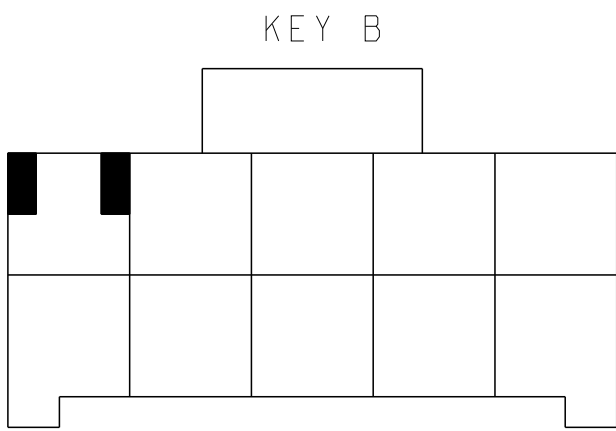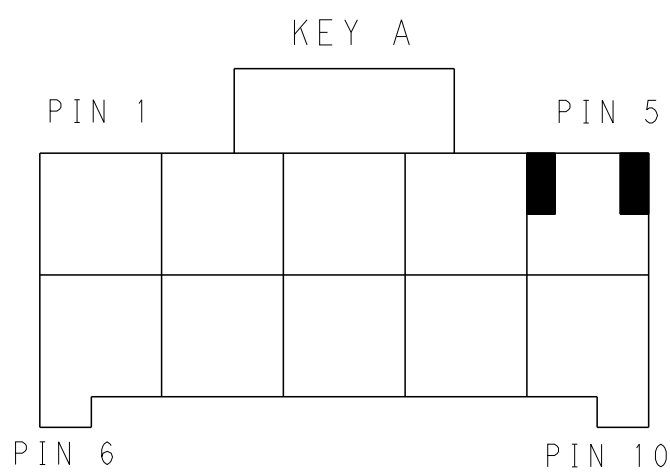



KEYING FOR 2*5 POS.

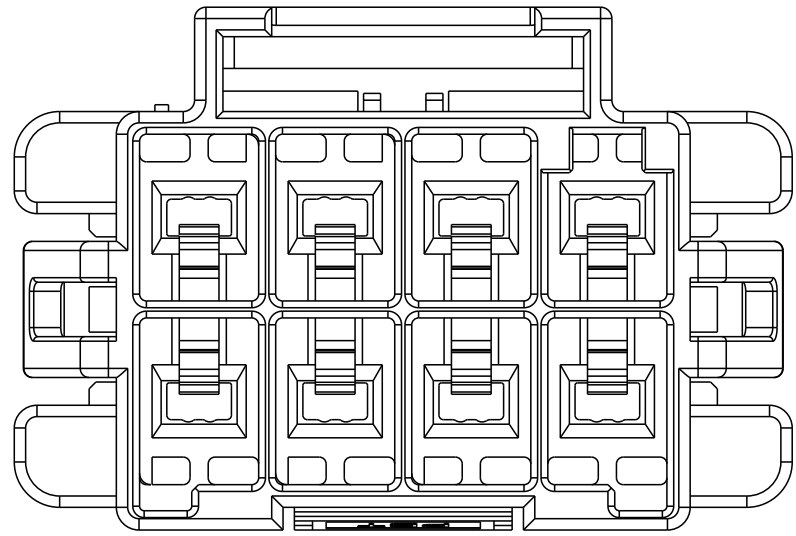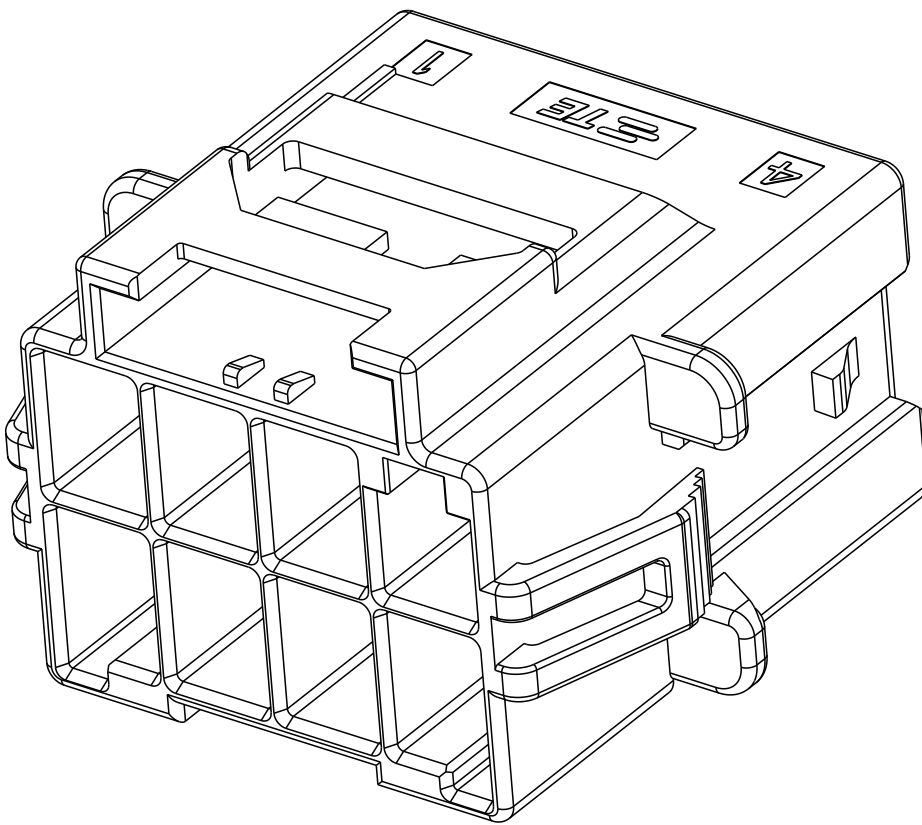





2*4 POSITIONS

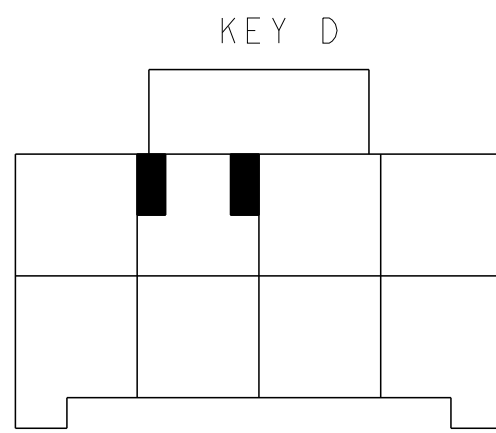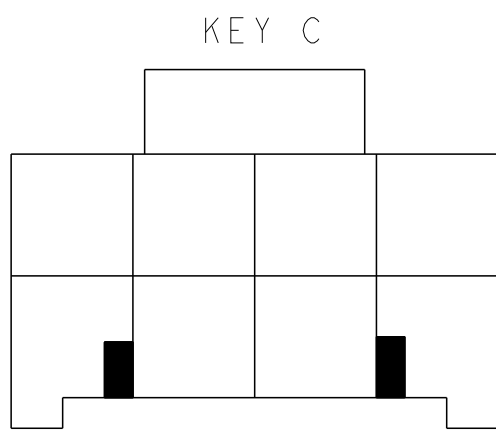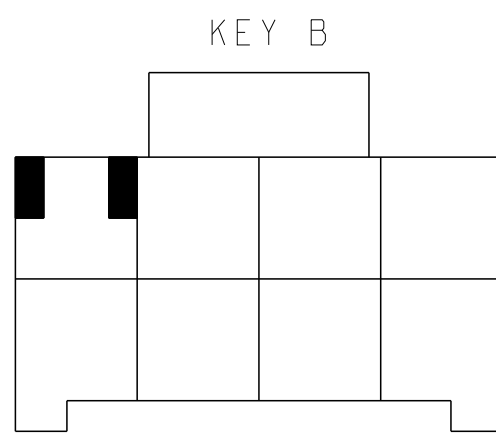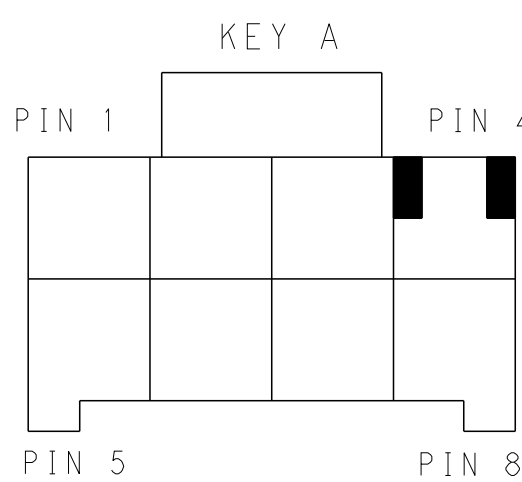



KEYING FOR 2*4 POS.

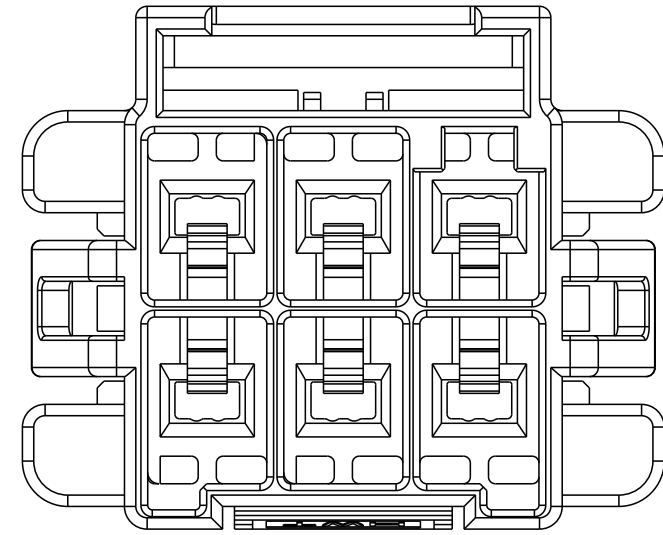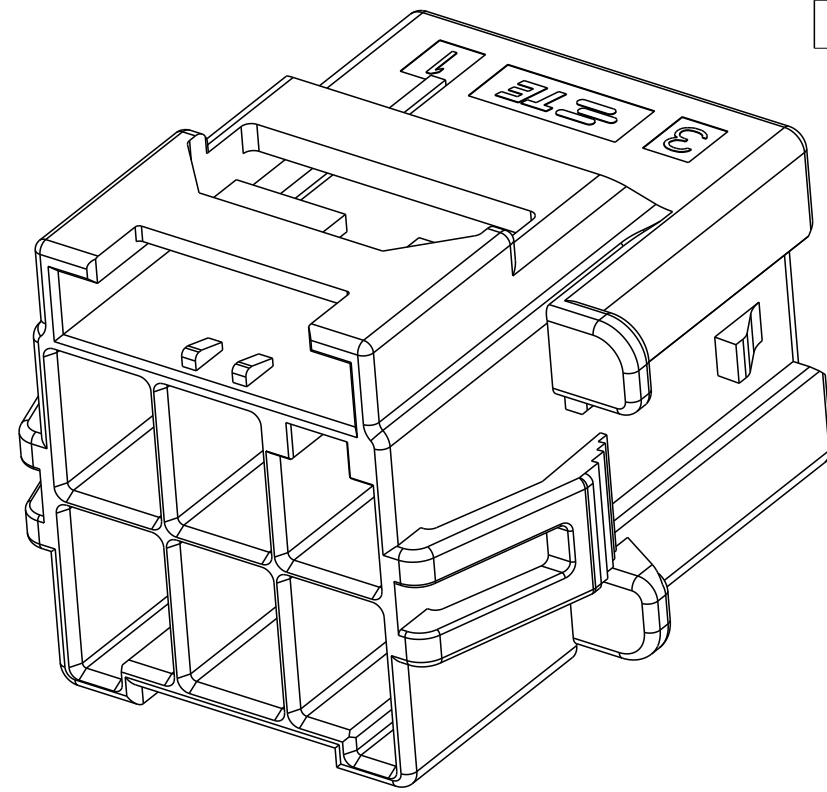





2*3 POSITIONS

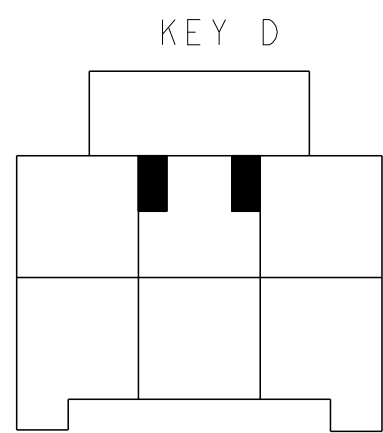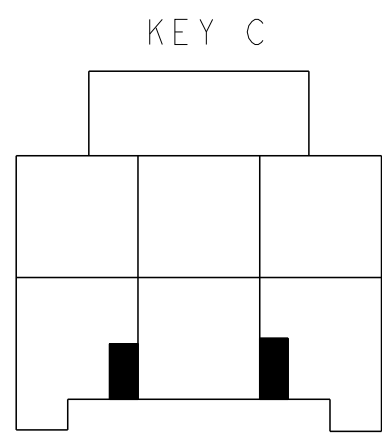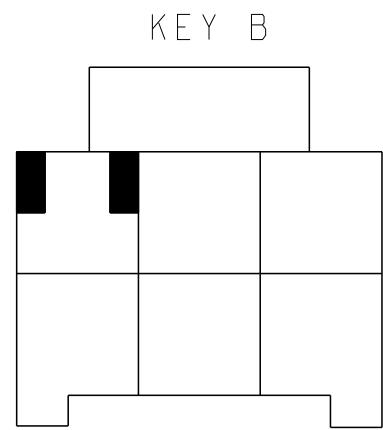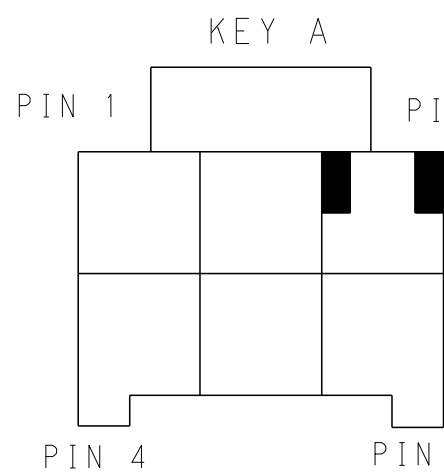

KEYING FOR 2*3 POS.

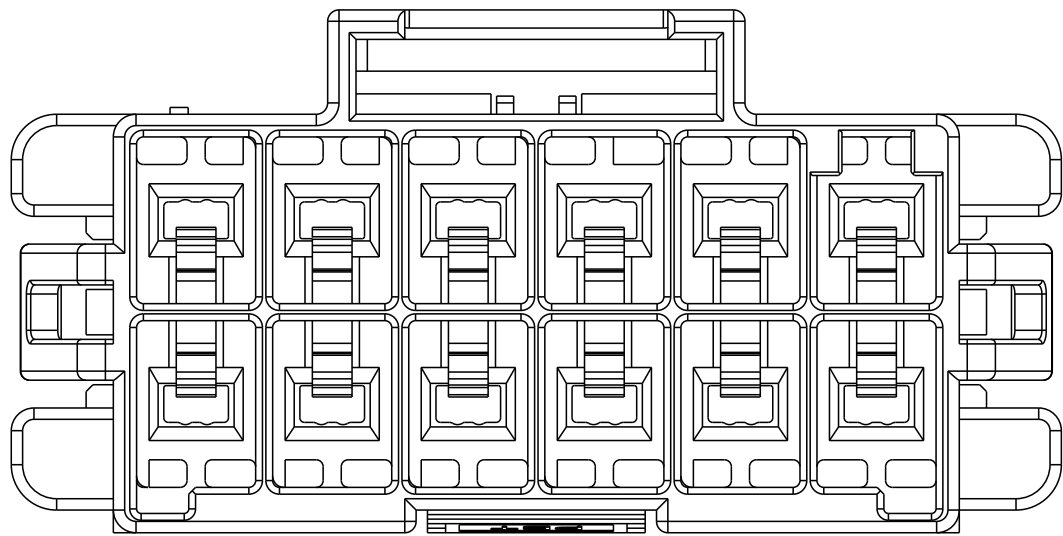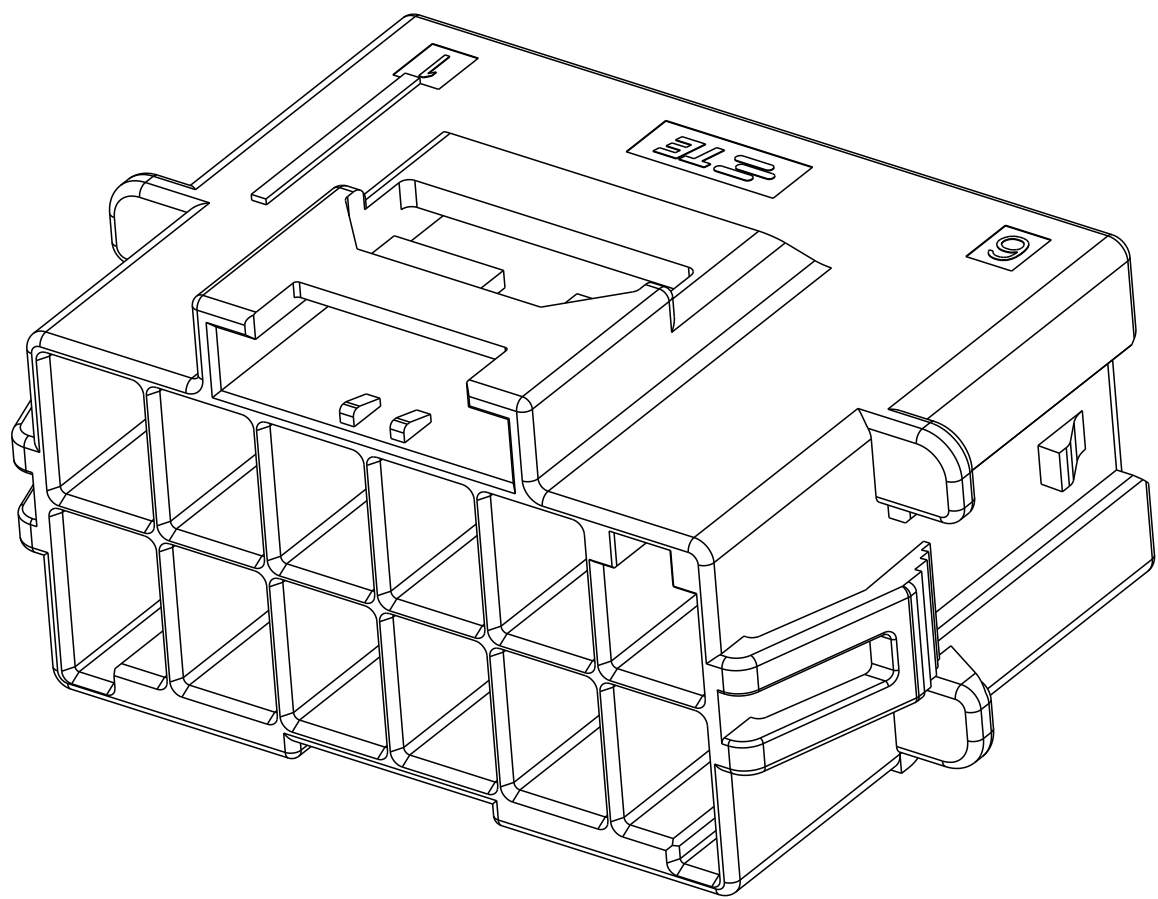

2*6 POSITIONS

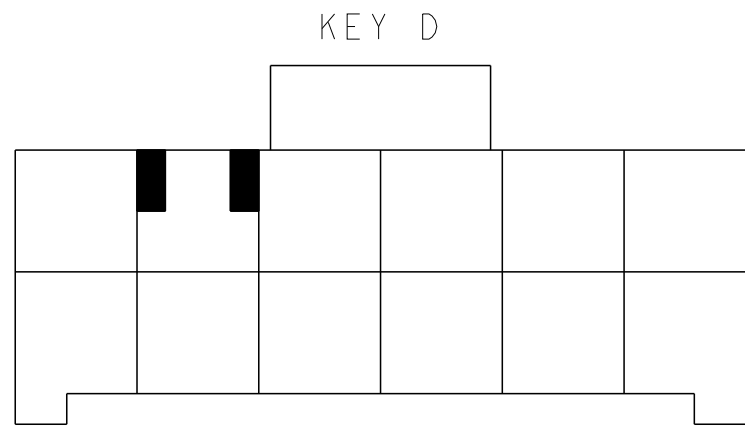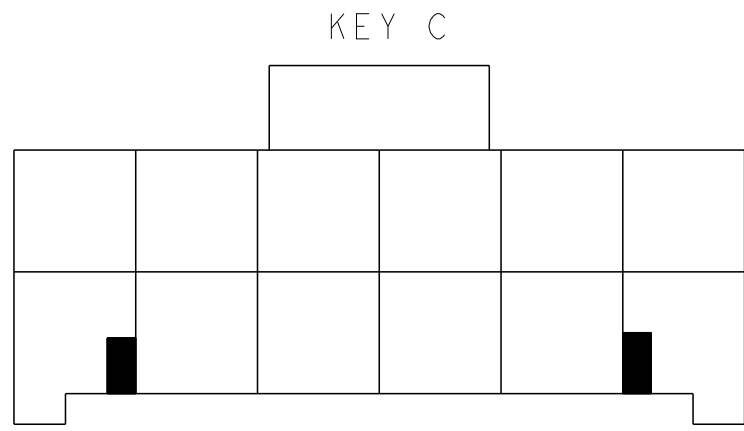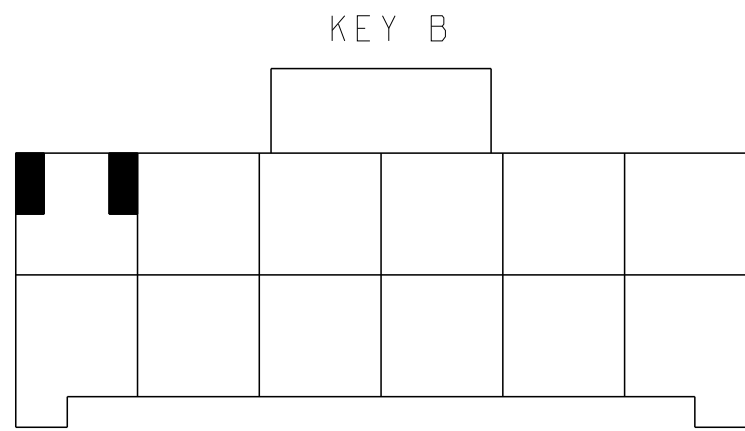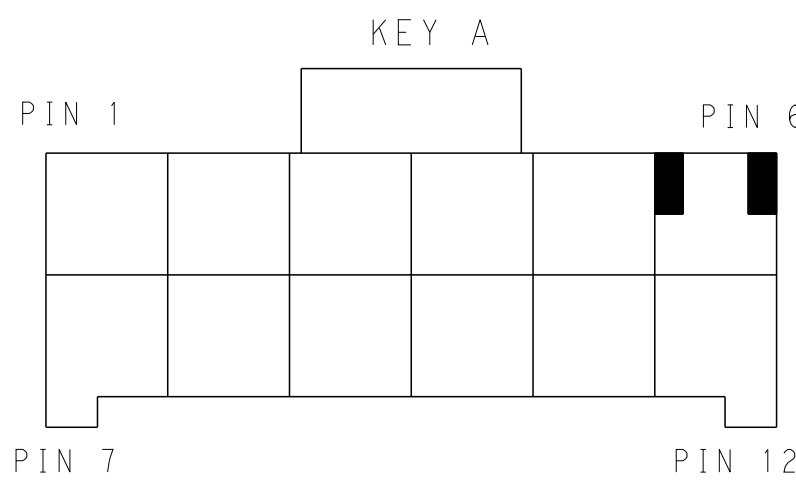

KEYING FOR 2*6 POS.

2*6	LEVEL 1	KEY A	1-1971775-6
		KEY B	2-1971775-6
2*5	LEVEL 2	KEY C	3-1971775-6
		KEY D	4-1971775-6
2*4	LEVEL 1	KEY A	5-1971775-6
		KEY B	6-1971775-6
2*3	LEVEL 2	KEY C	7-1971775-6
		KEY D	8-1971775-6
POS.	MATERIAL	KEY	P/N

2*6	LEVEL 1	KEY A	1-1971775-4
		KEY B	2-1971775-4
2*5	LEVEL 2	KEY C	3-1971775-4
		KEY D	4-1971775-4
2*4	LEVEL 1	KEY A	5-1971775-4
		KEY B	6-1971775-4
2*3	LEVEL 2	KEY C	7-1971775-4
		KEY D	8-1971775-4
POS.	MATERIAL	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN TOMMY WU 06JUL2012

CHK HAPYE WU 06JUL2012

APVD YUHONG MAO 06JUL2012

DIMENSIONS:

mm

0 PLC ±.01

1 PLC ±0.35

2 PLC ±0.25

3 PLC ±.01

4 PLC ±.01

ANGLES ±.01

FINISH -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC 108-106118

APPLICATION SPEC 114-106118

WEIGHT -

Customer Drawing

NAME CAP HOUSING, PANEL MOUNT, DOUBLE ROW POWER TRIPLE LOCK

SIZE A1

CAGE CODE 00779

DRAWING NO. C=1971775

RESTRICTED TO -

TE Connectivity

SCALE -

SHEET 2 OF 2

REV G