
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


LOC	DIST
-	-


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REVISED PER ECR-21-100678	08APR2021	SS	VS
	F	REVISED PER ECR-20-100915	28APR2021	JP	VS
	G	REVISED PER ECR-22-130081	12OCT2022	SKR	DS

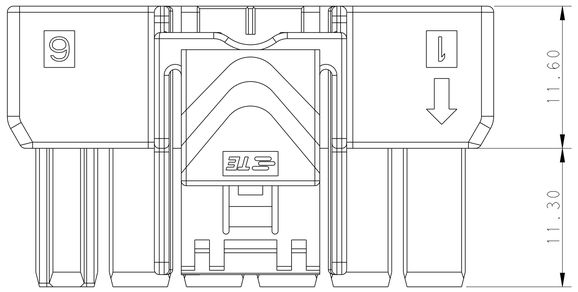


POS.	DIM.A
2*6	39.70
2*5	33.70
2*4	27.70
2*3	21.70

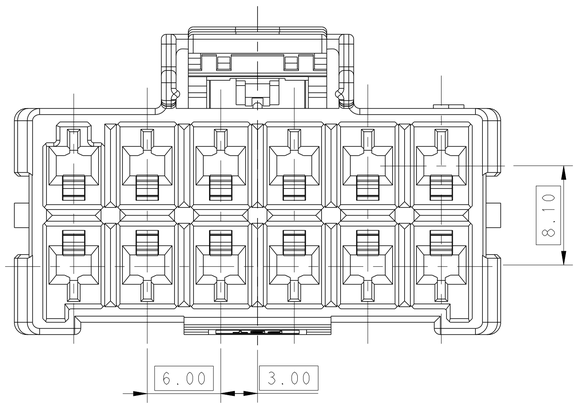

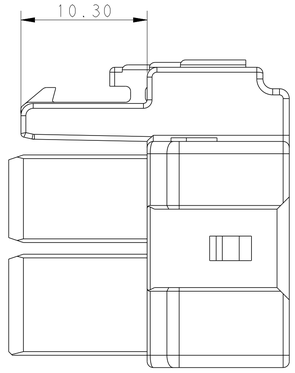

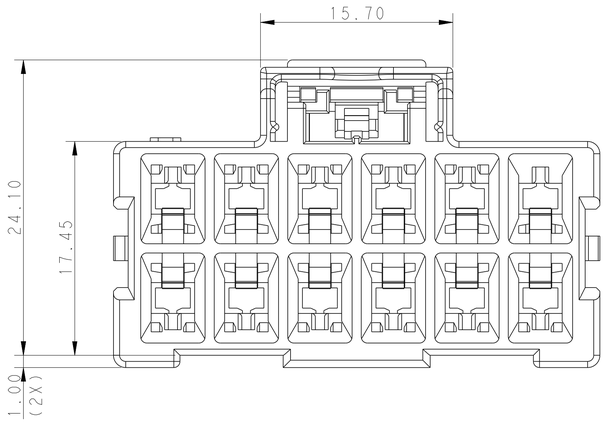

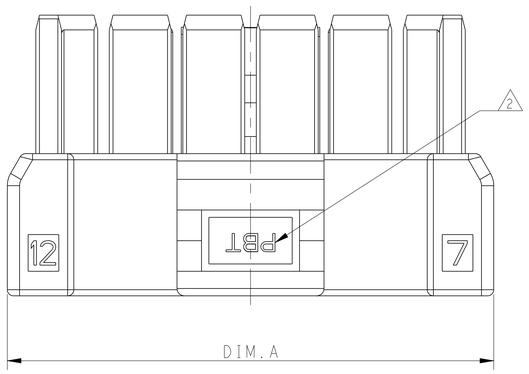

1. MATERIAL:
   LEVEL 1: PBT,STANDARD TEMPERATURE 105°C
   KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW

   LEVEL 2: PA66,HIGH TEMPERATURE 150°C
   KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL

2. MATERIAL MARK:
   LEVEL 1:PBT,LEVEL 2:HDT

3. APPLICABLE CONTACT P/N
   RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-*, 2238066-*

4. MATING CONN, P/N
   CAP HSG:*-1971774/5-*
   TPA (LOCKING PLATE):*-1971778-*

5. GLOW WIRE COMPLIANT IN ACCORDANCE WITH IEC 60335-1. THIS IS BASED ON THE PRODUCT MEETING A GWEPT 850° C TEST AND RESIN GWIT GREATER THAN OR EQUAL TO 775° C.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.35
2 PLC ±0.25
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL 1

FINISH - - -

DWN TOMMY WU 09JUL2012
CHK HAPYE WU 09JUL2012
APVD YUHONG MAO 09JUL2012
PRODUCT SPEC 108-106118
APPLICATION SPEC 114-106118
WEIGHT -

TE Connectivity

NAME PLUG HOUSING,DOUBLE ROW POWER TRIPLE LOCK
-

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-1971776 | RESTRICTED TO -


Customer Drawing | SCALE 4:1 | SHEET 1 OF 2 | REV G

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


LOC	DIST
-	-

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

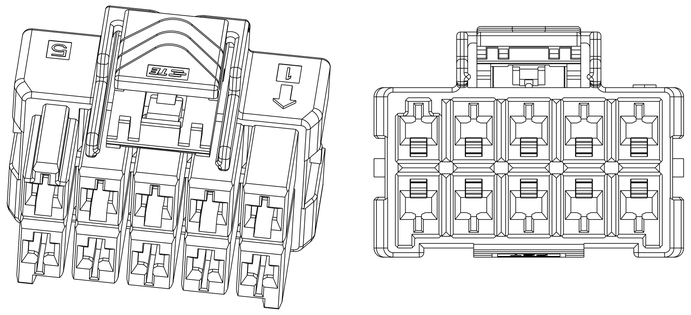


2*5 POSITIONS

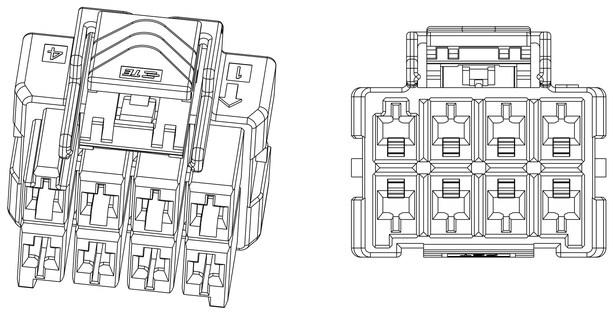


2*4 POSITIONS

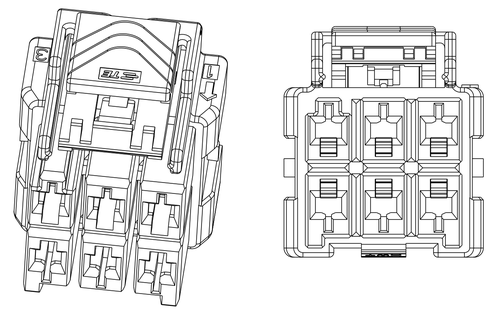


2*3 POSITIONS

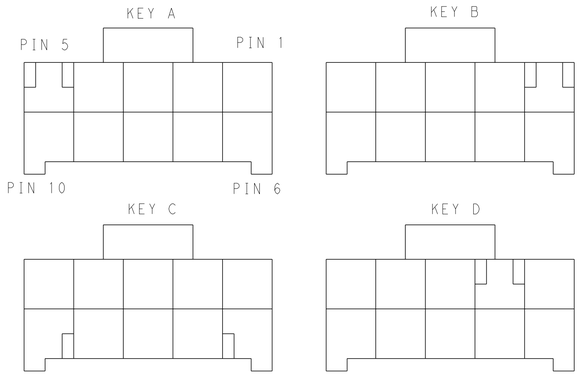

KEYING FOR 2*5 POS.

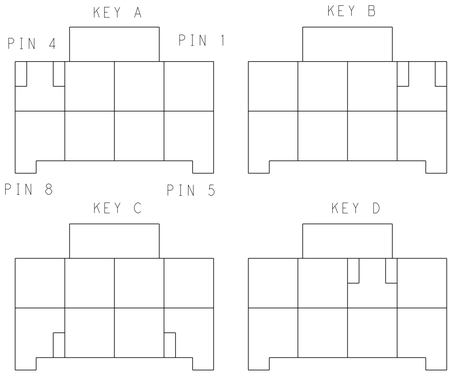


KEYING FOR 2*4 POS.

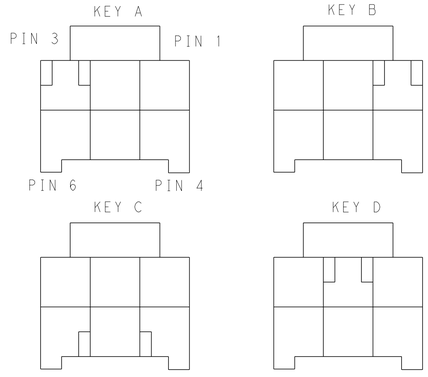


KEYING FOR 2*3 POS.

POS.	MATERIAL	KEY	P/N
2*6	LEVEL 1	KEY A	1-1971776-6
		KEY B	2-1971776-6
		KEY C	3-1971776-6
		KEY D	4-1971776-6
	LEVEL 2 (5)	KEY A	5-1971776-6
		KEY B	6-1971776-6
		KEY C	7-1971776-6
		KEY D	8-1971776-6
2*5	LEVEL 1	KEY A	1-1971776-5
		KEY B	2-1971776-5
		KEY C	3-1971776-5
		KEY D	4-1971776-5
	LEVEL 2 (5)	KEY A	5-1971776-5
		KEY B	6-1971776-5
		KEY C	7-1971776-5
		KEY D	8-1971776-5

POS.	MATERIAL	KEY	P/N
2*4	LEVEL 1	KEY A	1-1971776-4
		KEY B	2-1971776-4
		KEY C	3-1971776-4
		KEY D	4-1971776-4
	LEVEL 2 (5)	KEY A	5-1971776-4
		KEY B	6-1971776-4
		KEY C	7-1971776-4
		KEY D	8-1971776-4
2*3	LEVEL 1	KEY A	1-1971776-3
		KEY B	2-1971776-3
		KEY C	3-1971776-3
		KEY D	4-1971776-3
	LEVEL 2 (5)	KEY A	5-1971776-3
		KEY B	6-1971776-3
		KEY C	7-1971776-3
		KEY D	8-1971776-3

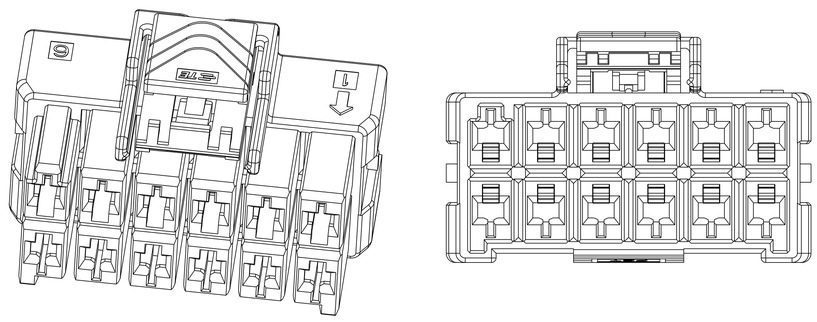

2*6 POSITIONS

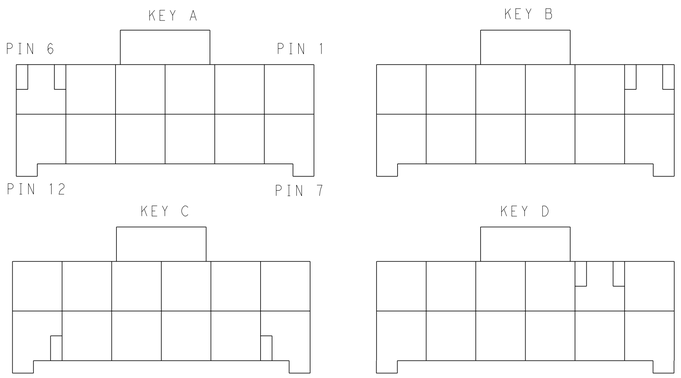

KEYING FOR 2*6 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.35
2 PLC ±0.25
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL - -
FINISH - -

DWN TOMMY WU 09JUL2012
CHK HAPYE WU 09JUL2012
APVD YUHONG MAO 09JUL2012
PRODUCT SPEC 108-106118
APPLICATION SPEC 114-106118
WEIGHT -

TE Connectivity

NAME PLUG HOUSING,DOUBLE ROW POWER TRIPLE LOCK -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1971776	-

Customer Drawing | SCALE 4:1 | SHEET 2 OF 2 | REV G