

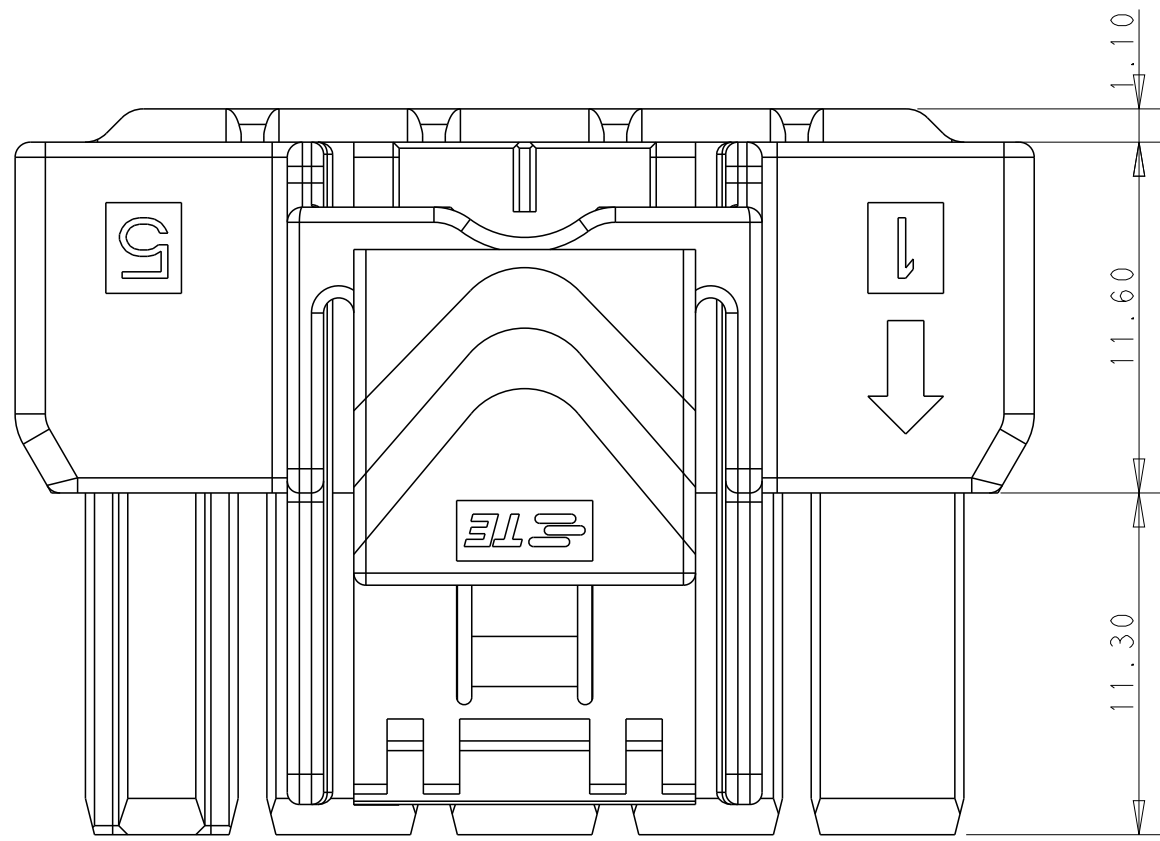
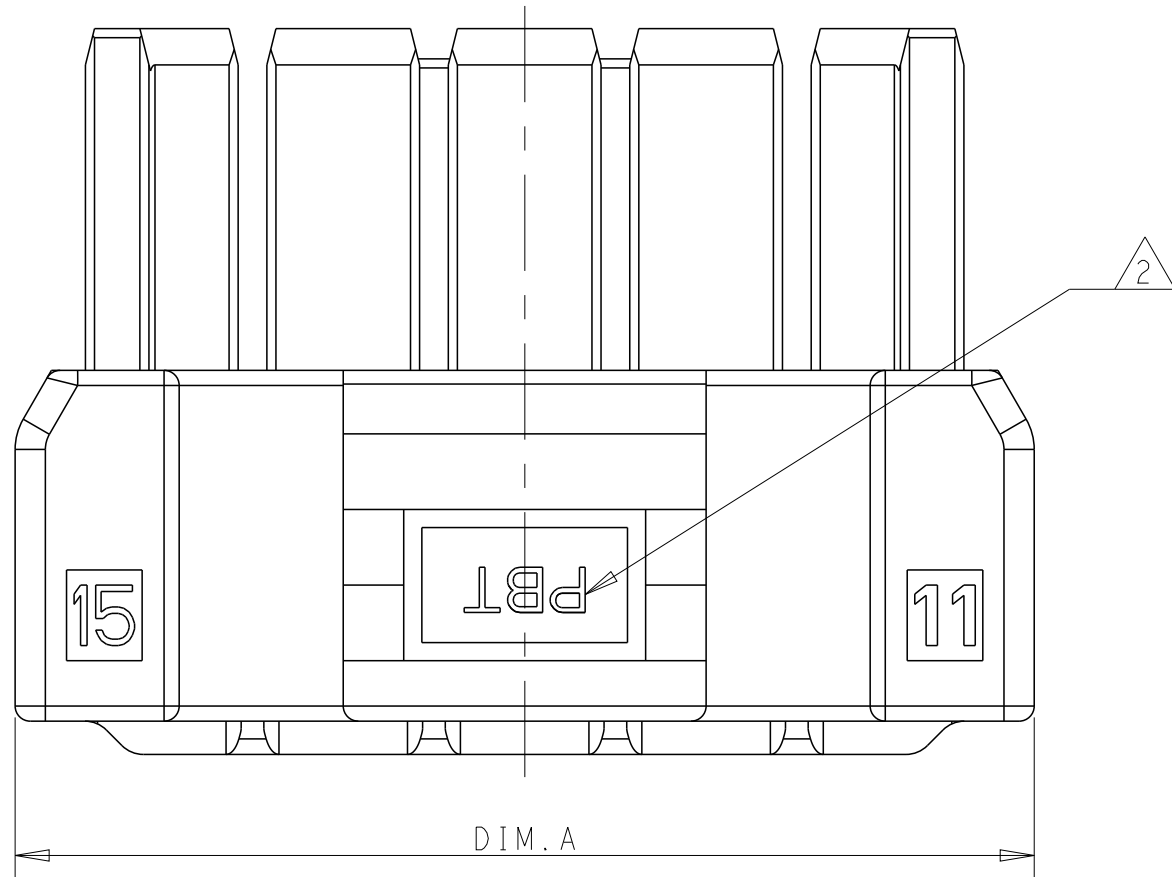
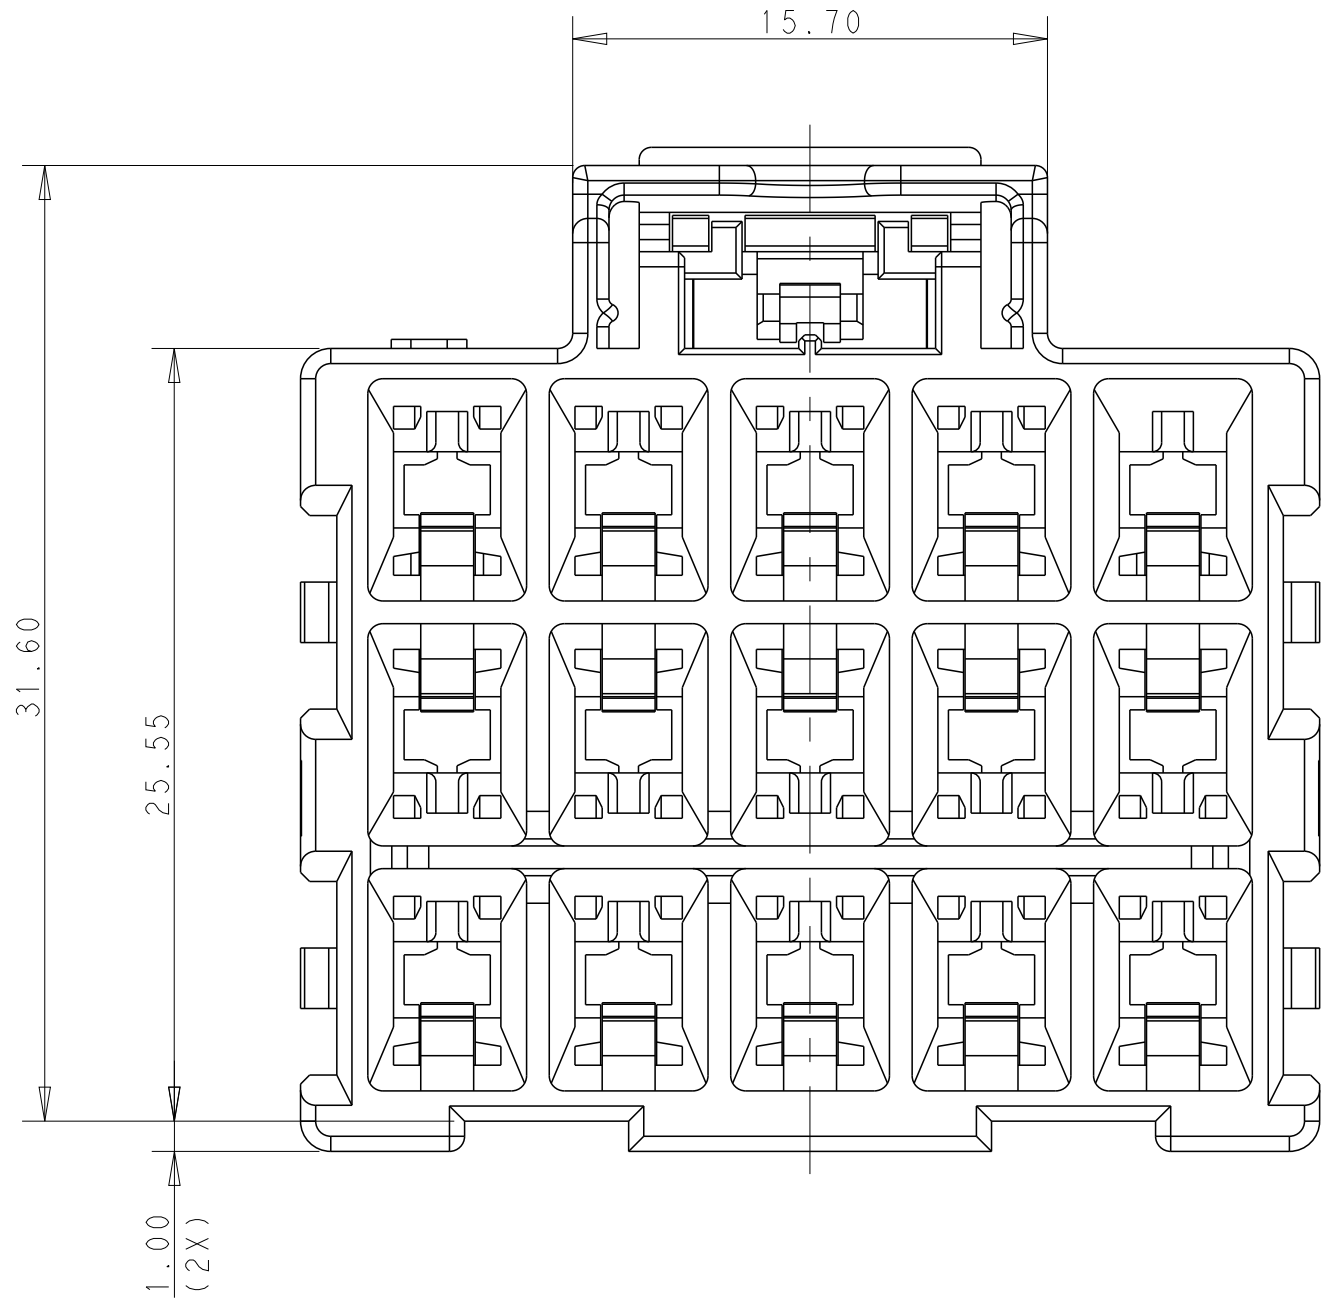


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
E		REVISED PER ECR-21-100678	08APR2021	SS	VS
F		REVISED PER ECR-20-100915	28APR2021	JP	VS
G		REVISED PER ECR-22-130081	12OCT2022	SKR	DS

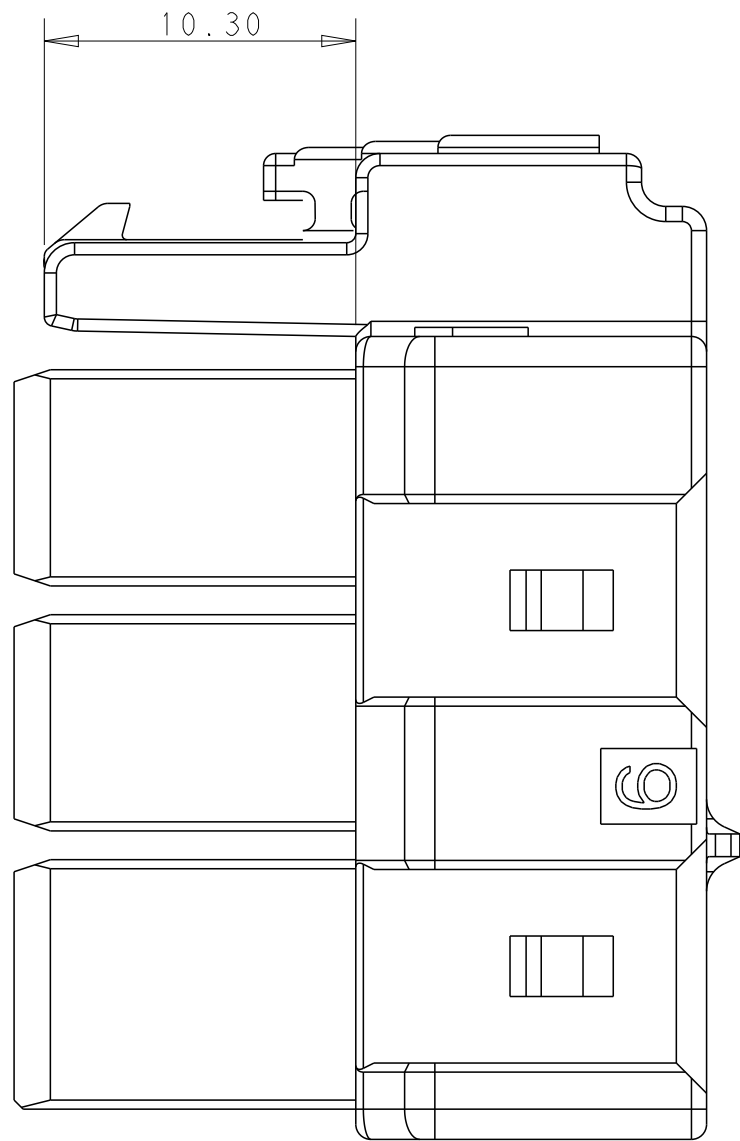







POS.	DIM. A
3*5	33.70
3*4	27.70
3*3	21.70

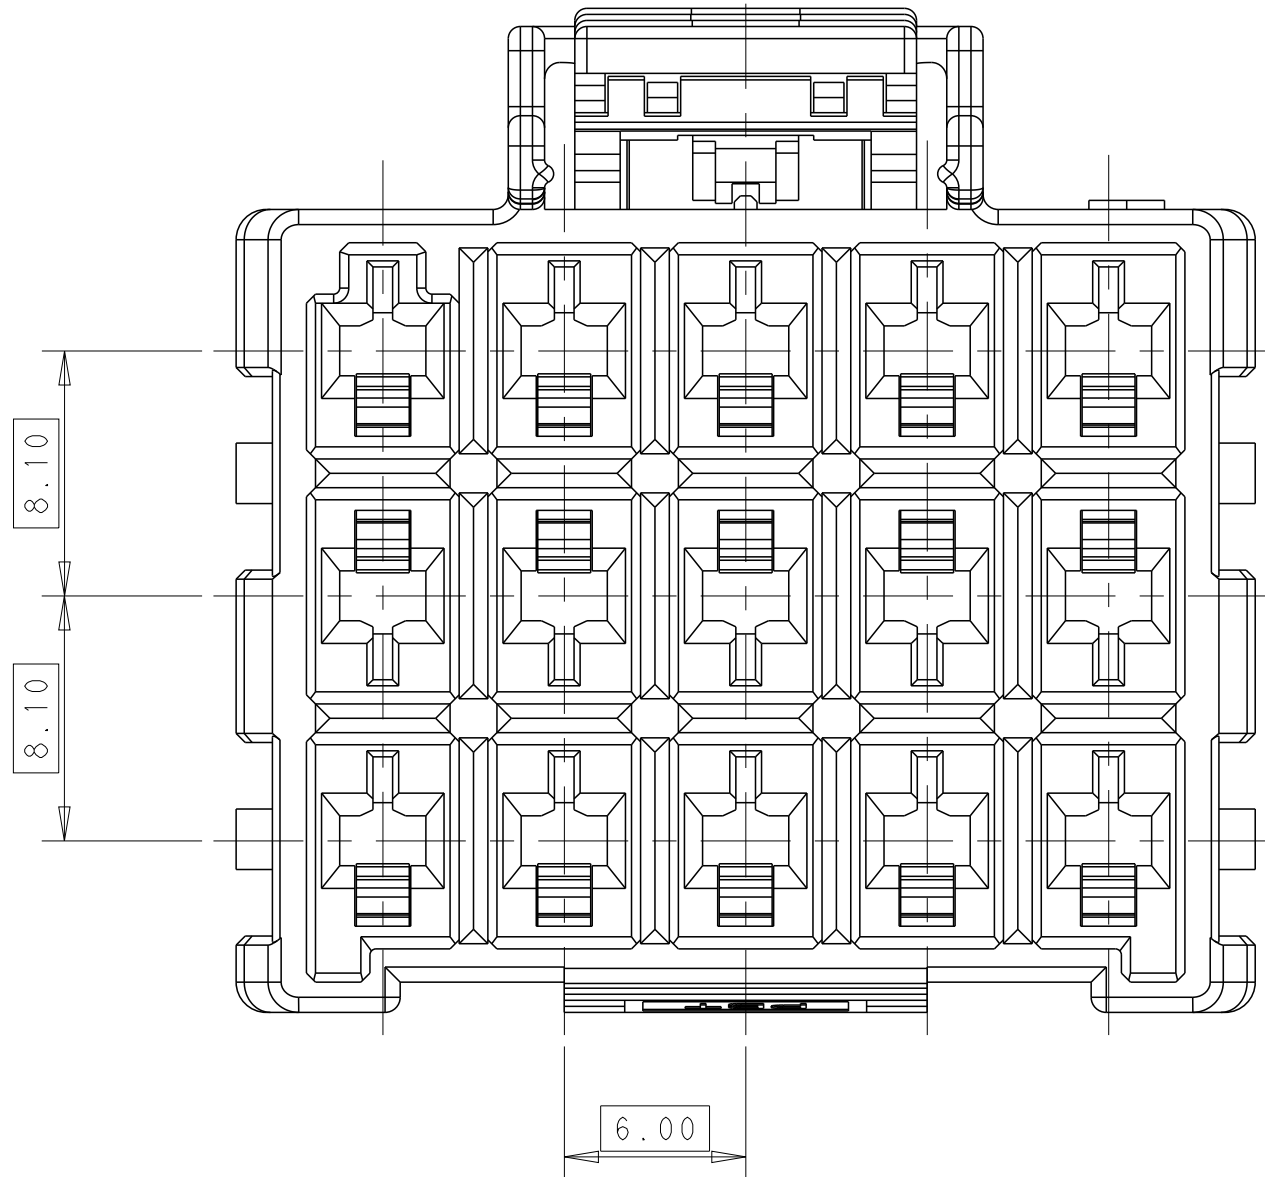

- ⚠ MATERIAL:
LEVEL 1: PBT, STANDARD TEMPERATURE 105°C
KEY A: NATURAL; KEY B: PURPLE; KEY C: BLUE; KEY D: YELLOW
LEVEL 2: PA66, HIGH TEMPERATURE 150°C
KEY A: LIGHT GREY; KEY B: RED; KEY C: BLACK; KEY D: NATURAL
- ⚠ MATERIAL MARK:
LEVEL 1: PBT, LEVEL 2: HDT
3. APPLICABLE CONTACT P/N
RECEPTACLE CONTACT: 1971237/1971779/81/83/85/87-*, 2238066-*
4. MATING CONN, P/N
CAP HSG: *-1971874/5-*,
DOUBLE ROW LOCK PLATE: *-1971778-*, SINGLE ROW LOCK PLATE: *-1971777-*
- ⚠ GLOW WIRE COMPLIANT IN ACCORDANCE WITH IEC 60335-1. THIS IS BASED ON THE PRODUCT MEETING A GWEPT 850°C TEST AND RESIN GWIT GREATER THAN OR EQUAL TO 775°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 09JUL2012	 TE Connectivity			
DIMENSIONS: mm		CHK HAPYE WU 09JUL2012				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD YUZHONG MAO 09JUL2012	NAME	PLUG HOUSING, TRIPLE ROW POWER TRIPLE LOCK		
		PRODUCT SPEC 108-106118	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL		APPLICATION SPEC 114-106118				
		WEIGHT -				
FINISH		Customer Drawing	SCALE 3:1		SHEET 1 OF 2	REV G

REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN
-	-	SEE SHEET 1	-	-

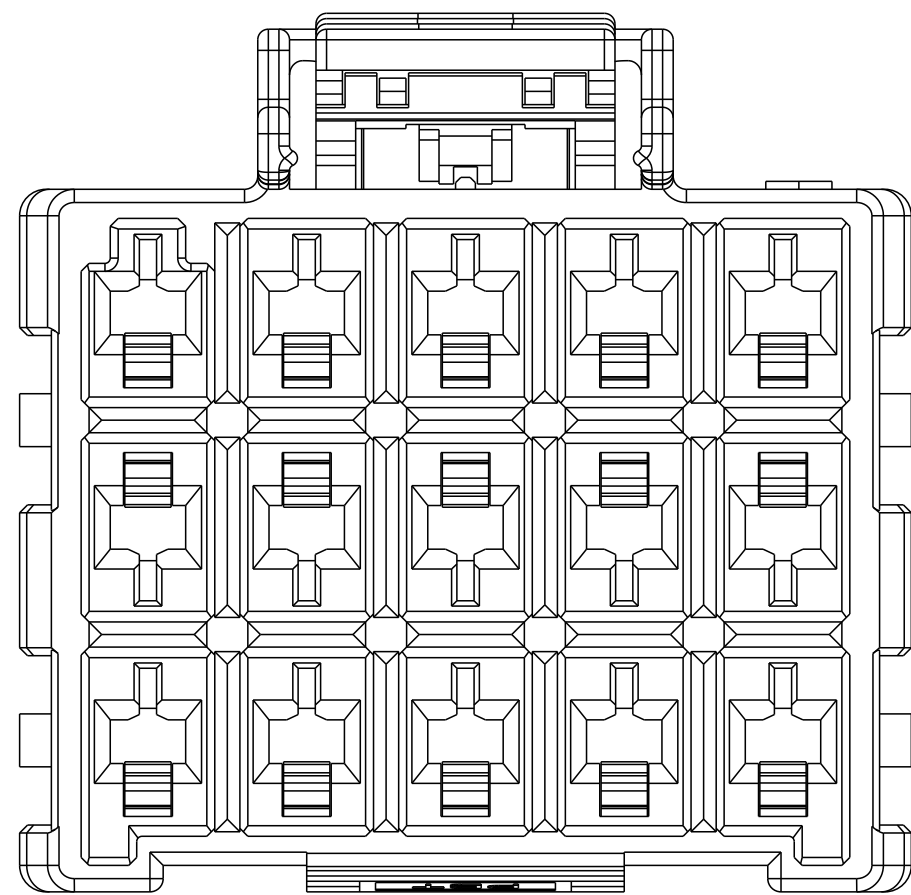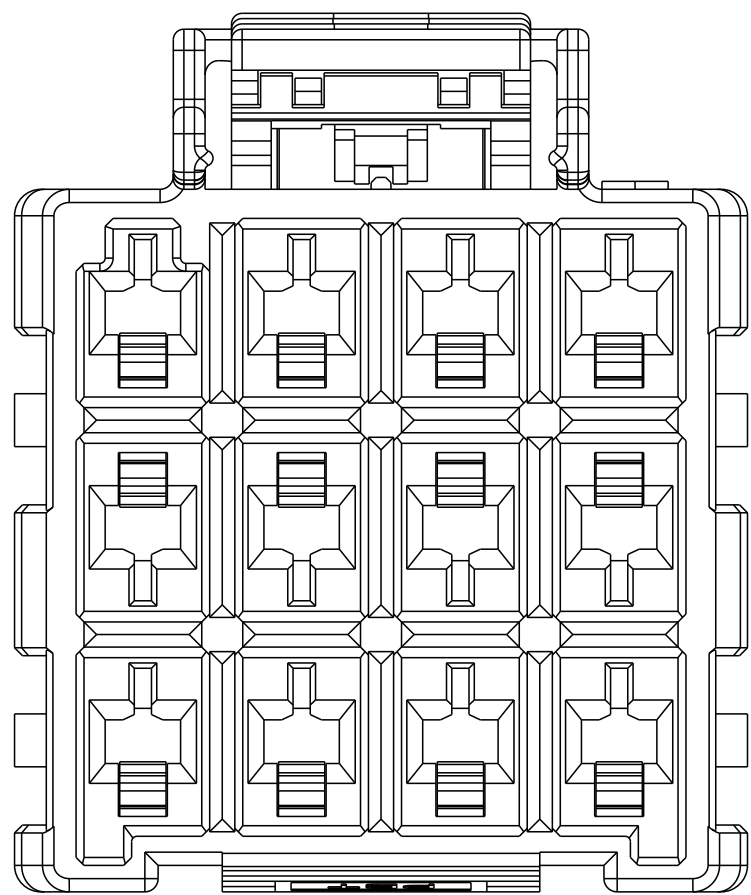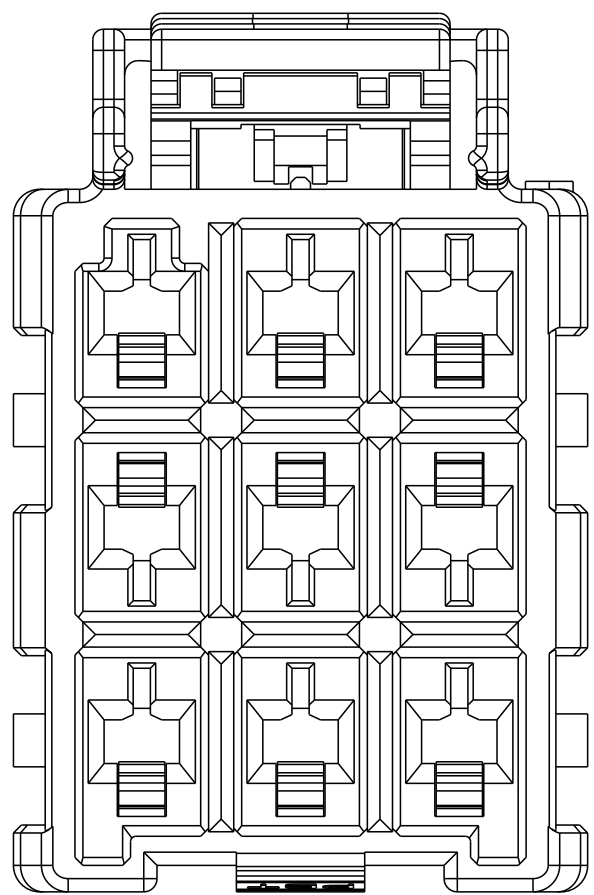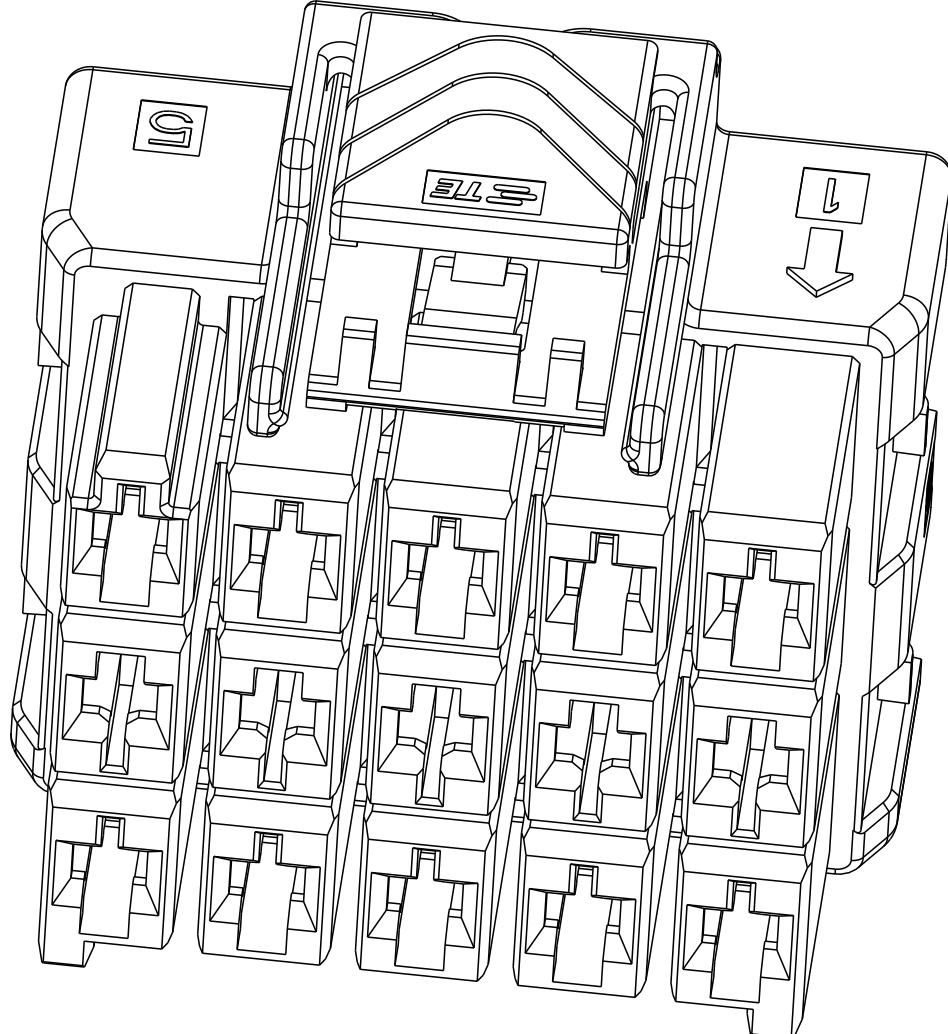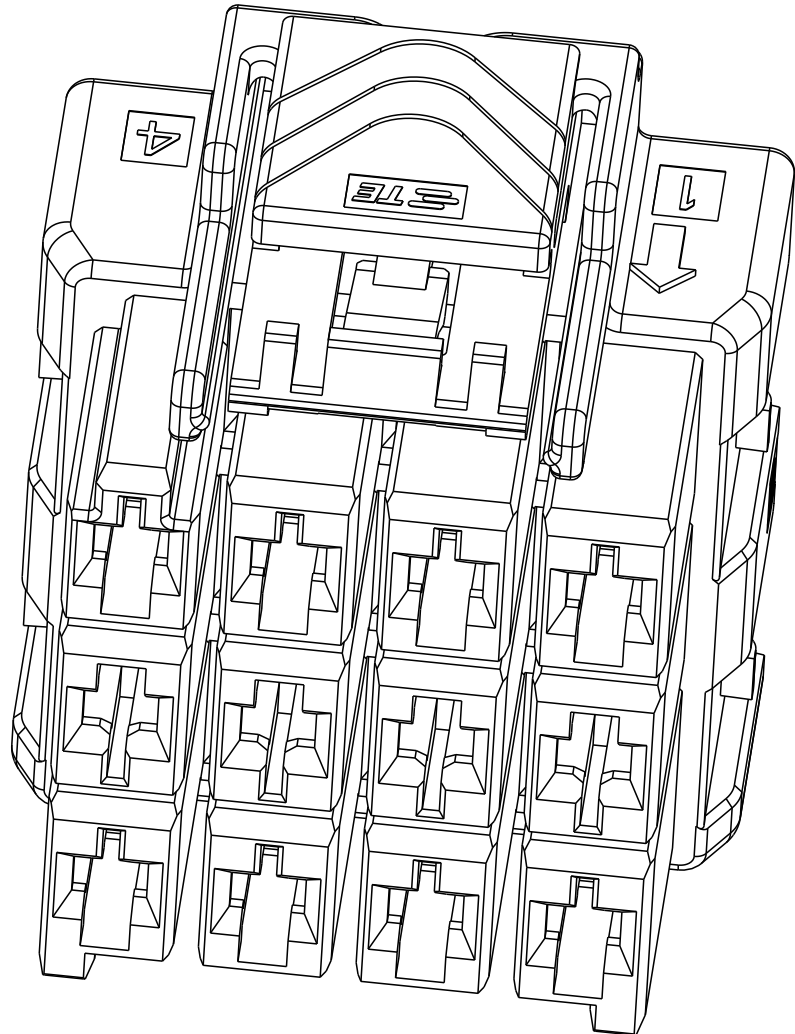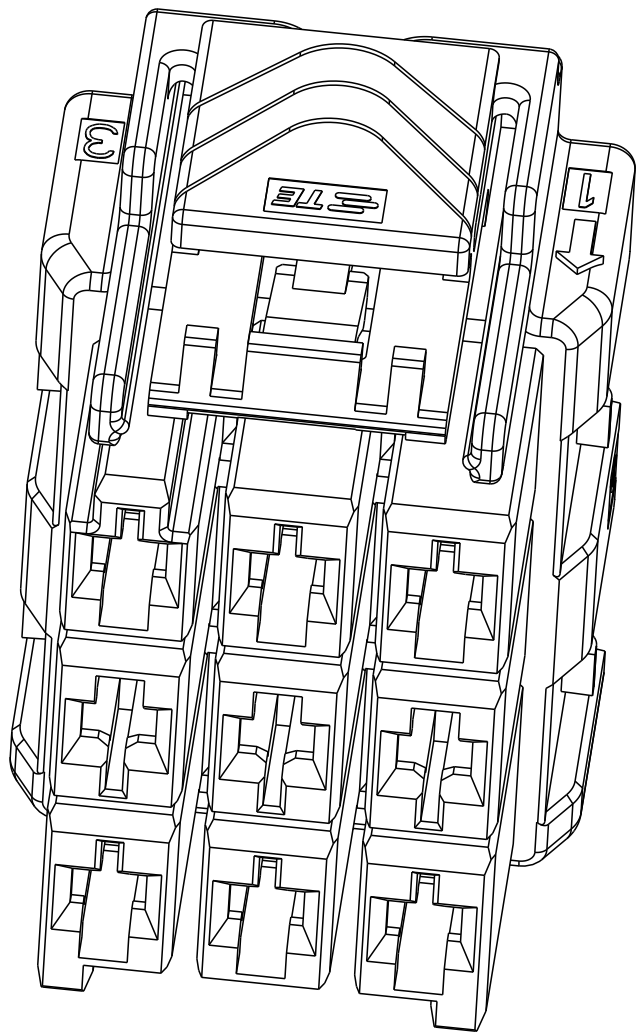


3*5	LEVEL 1	KEY A	1-1971876-7
		KEY B	2-1971876-7
		KEY C	3-1971876-7
		KEY D	4-1971876-7
3*4	LEVEL 2 5	KEY A	5-1971876-7
		KEY B	6-1971876-7
		KEY C	7-1971876-7
		KEY D	8-1971876-7
3*3	LEVEL 1	KEY A	1-1971876-4
		KEY B	2-1971876-4
		KEY C	3-1971876-4
		KEY D	4-1971876-4
3*3	LEVEL 2 5	KEY A	5-1971876-4
		KEY B	6-1971876-4
		KEY C	7-1971876-4
		KEY D	8-1971876-4
3*3	LEVEL 1	KEY A	1-1971876-3
		KEY B	2-1971876-3
		KEY C	3-1971876-3
		KEY D	4-1971876-3
3*3	LEVEL 2 5	KEY A	5-1971876-3
		KEY B	6-1971876-3
		KEY C	7-1971876-3
		KEY D	8-1971876-3
POS.	MATERIAL	KEY	P/N


3*3 POSITIONS

3*4 POSITIONS


3*5 POSITIONS

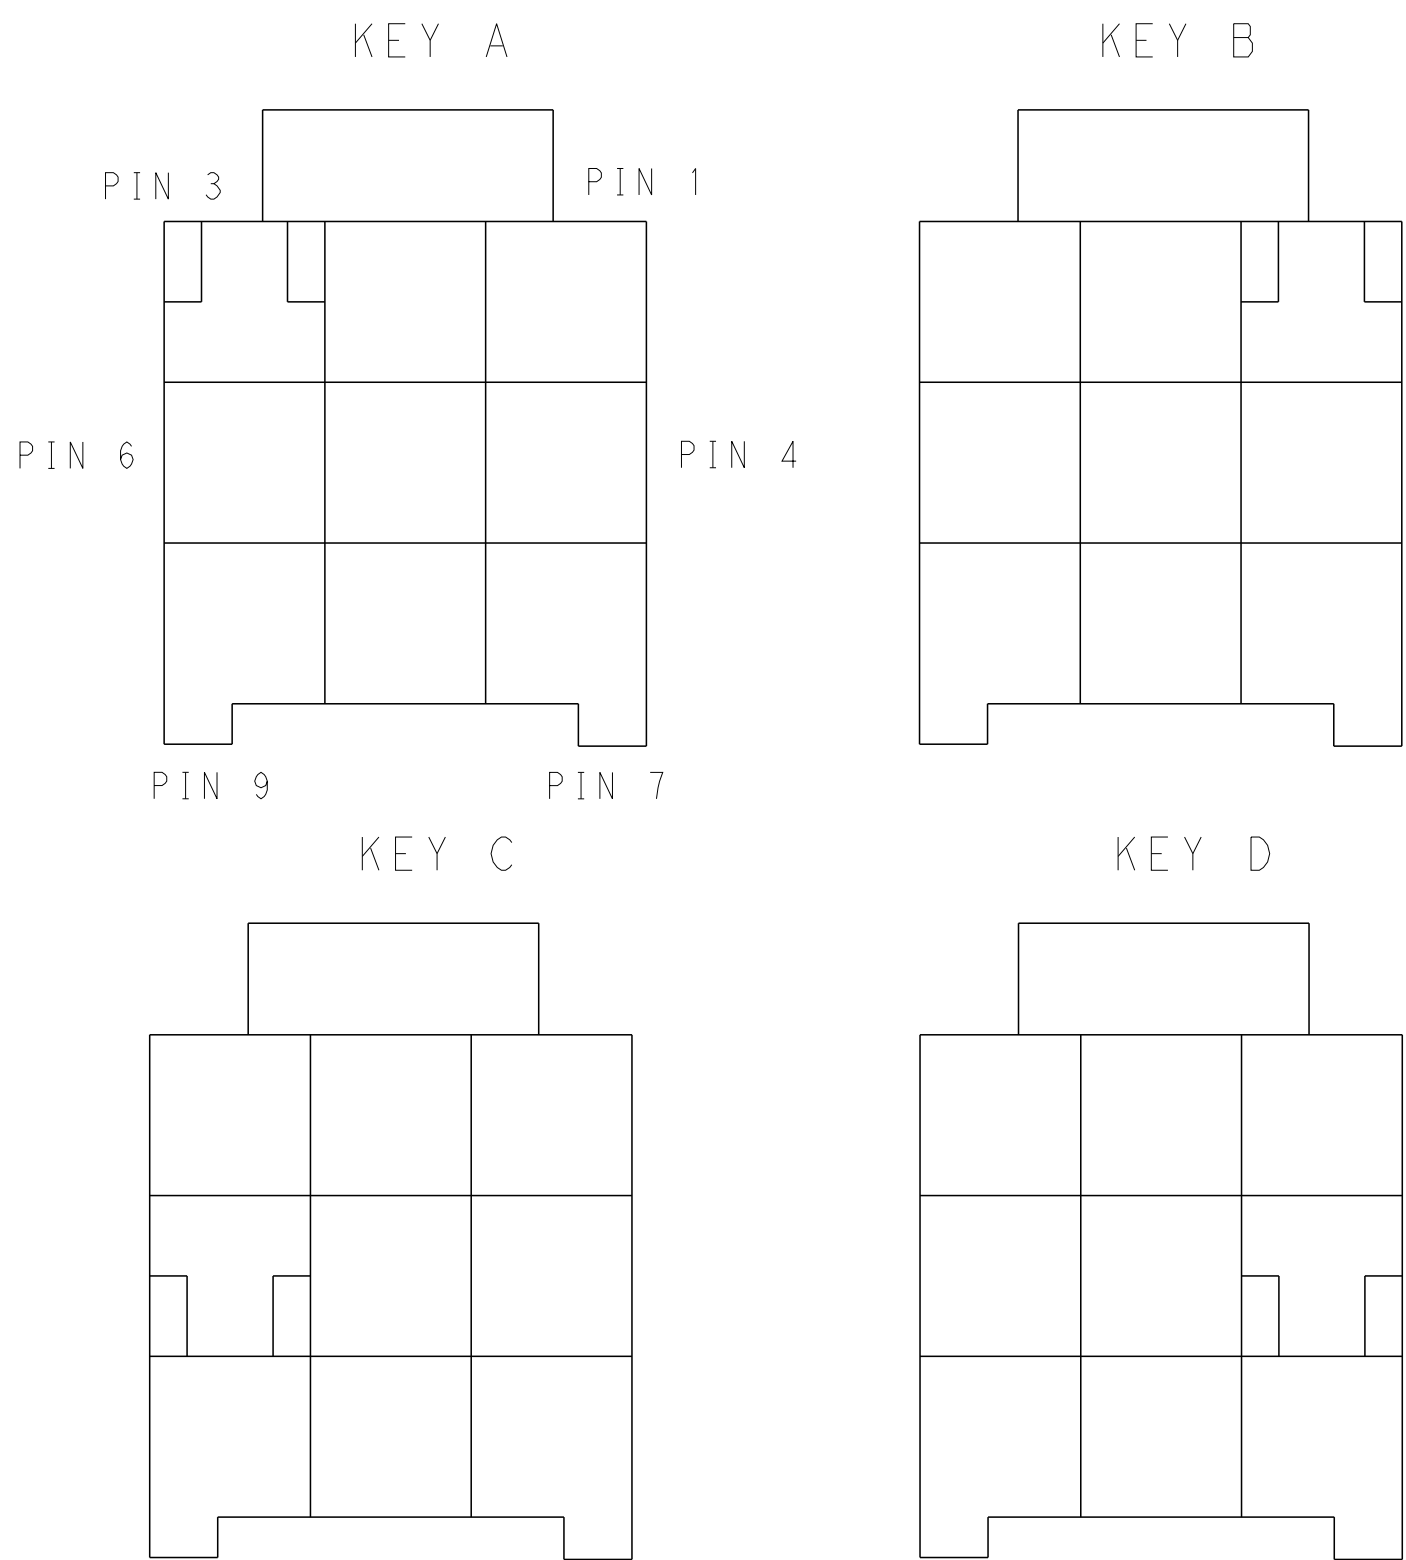

KEYING FOR 3*3 POS.

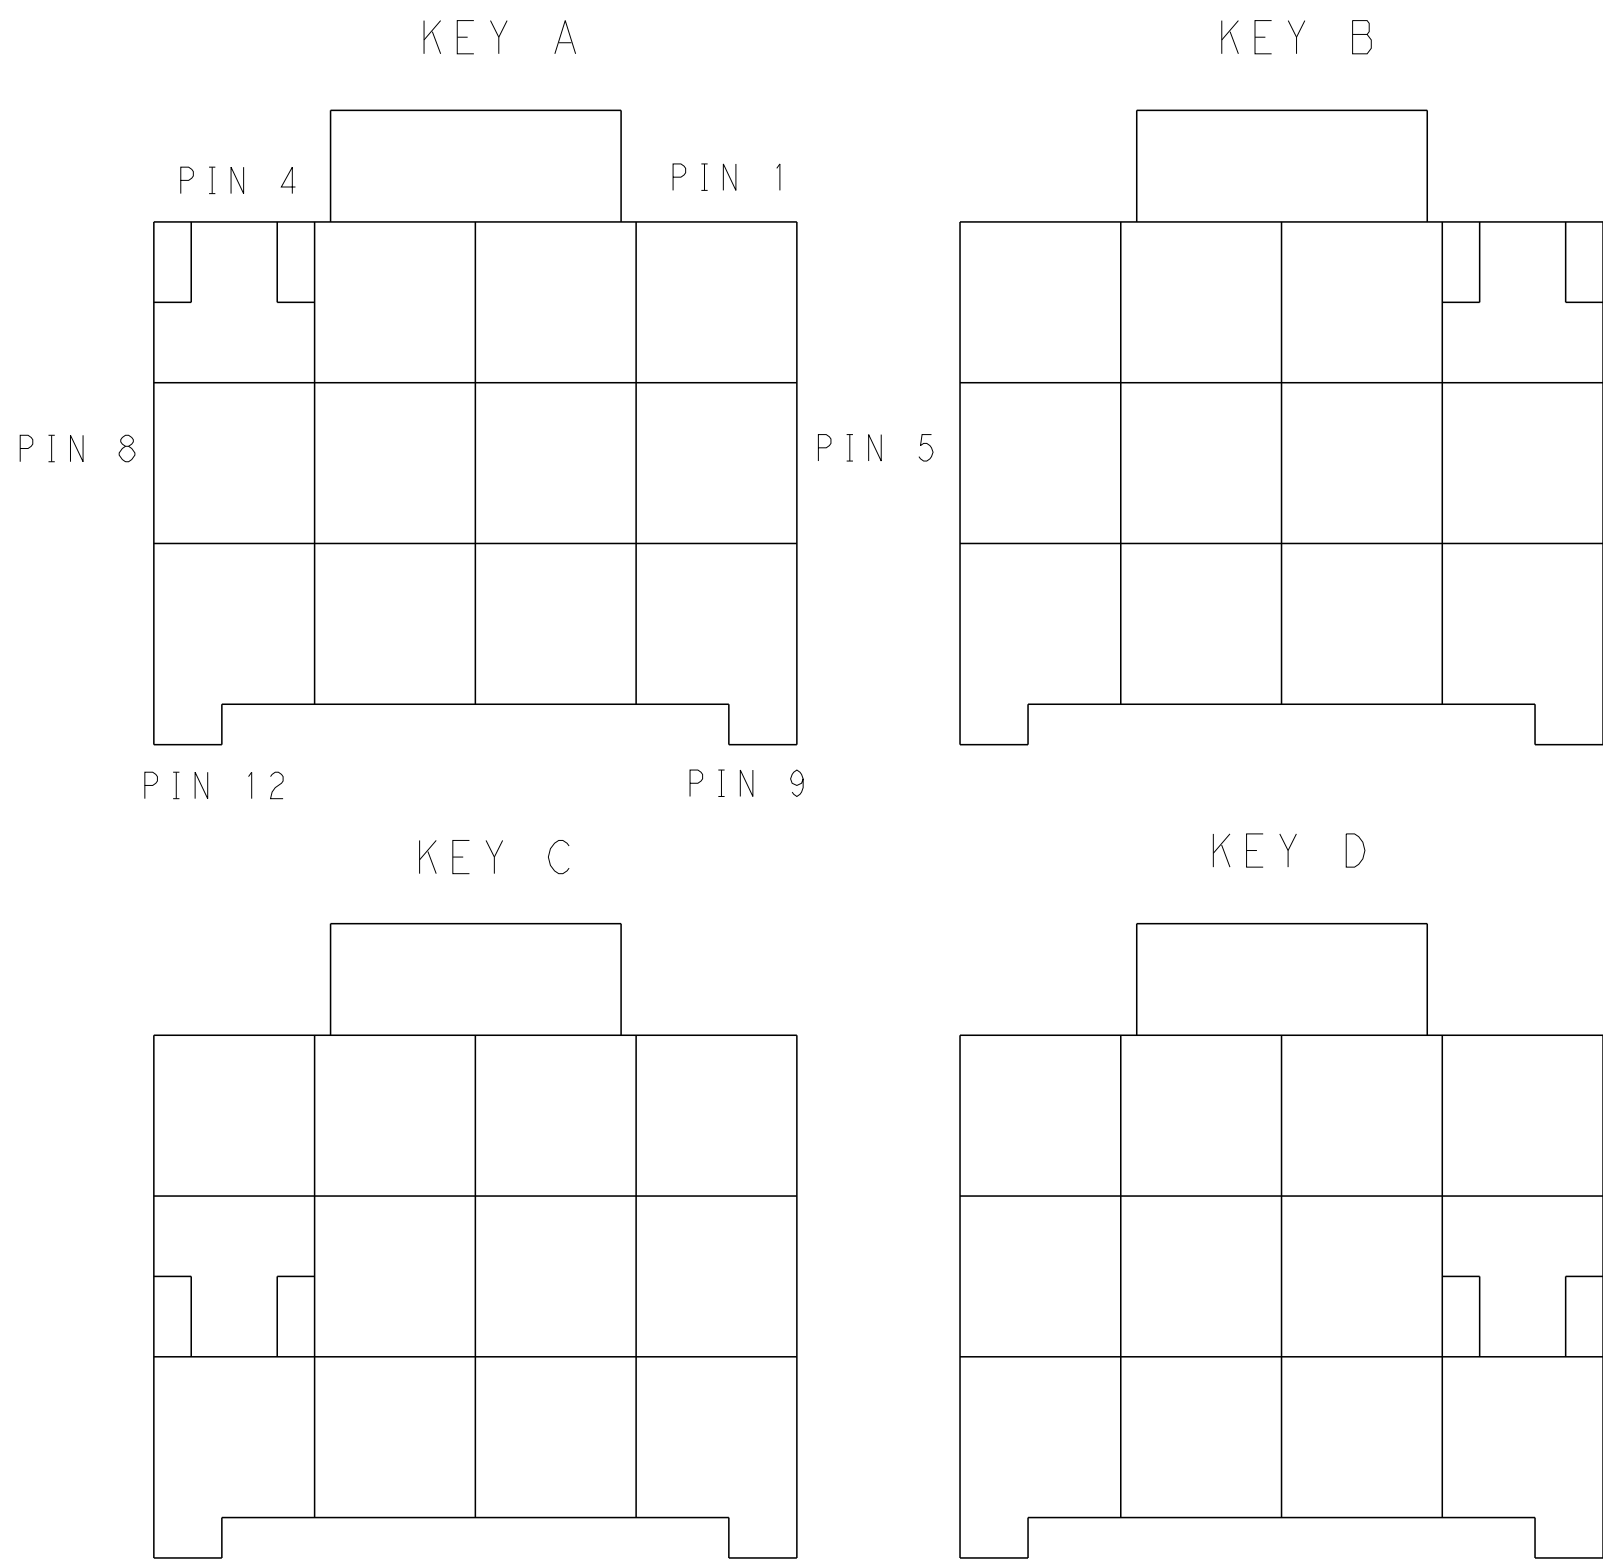

KEYING FOR 3*4 POS.

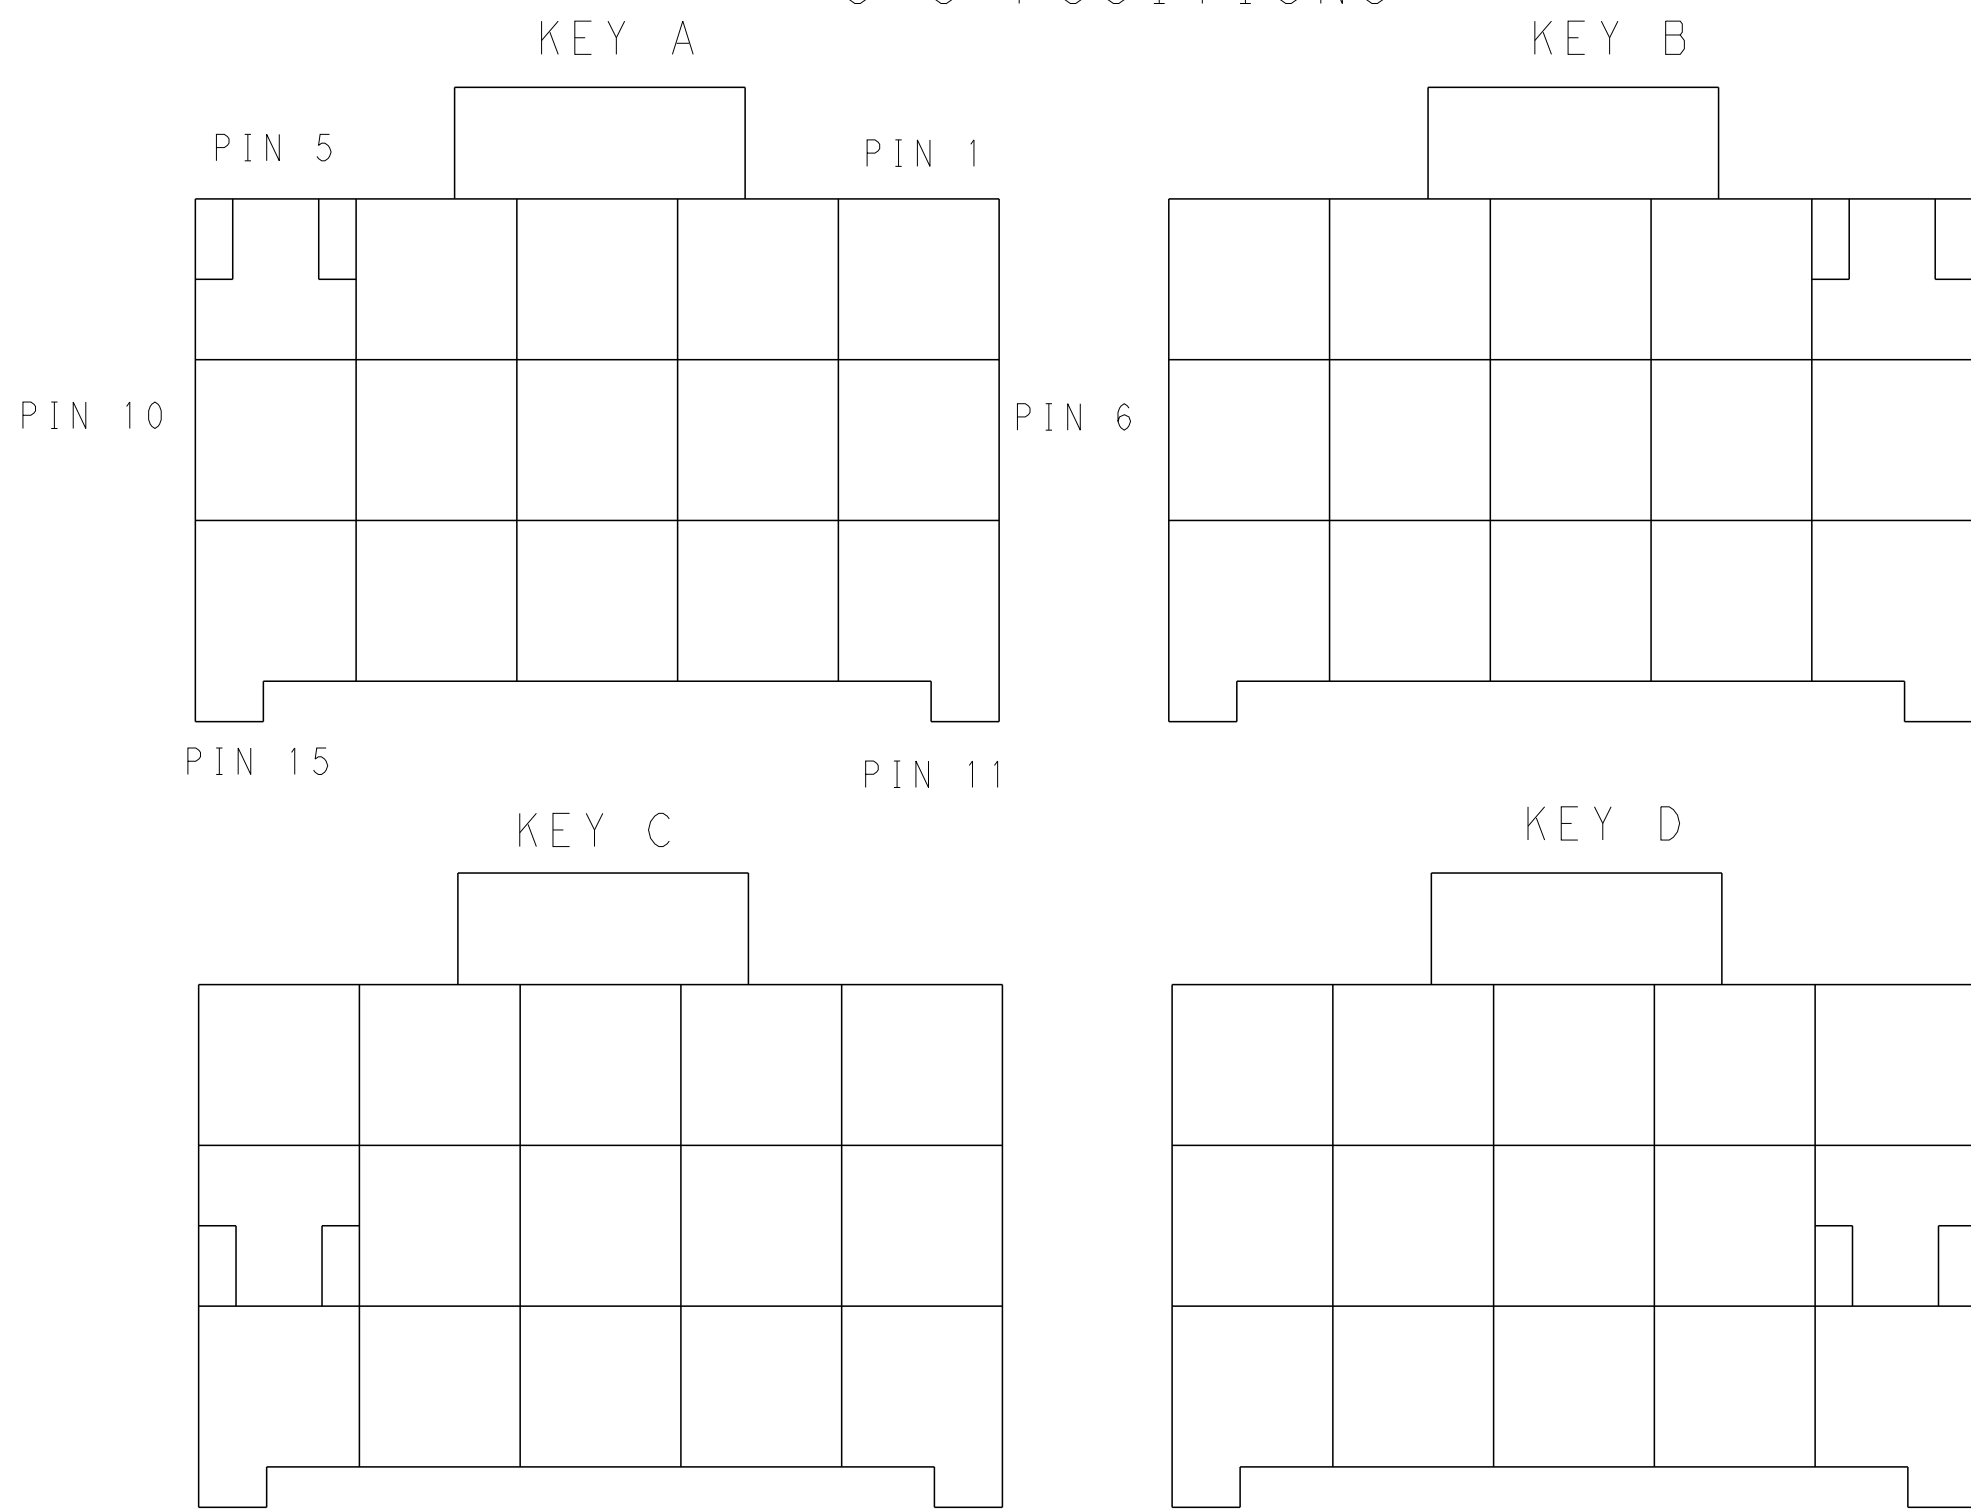

KEYING FOR 3*5 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN	TOMMY_WU	09JUL2012	 TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:			CHK	HAPYE_WU	09JUL2012				
DIMENSIONS:			APVD	YUHHONG_MAO	09JUL2012				
mm			PRODUCT SPEC						
			APPLICATION SPEC						
			108-106118						
			APPLICATION SPEC						
			114-106118						
MATERIAL			SIZE				CAGE CODE	DRAWING NO	RESTRICTED TO
-			A1				100779	C=1971876	-
-			WEIGHT				-		
-			Customer Drawing				SCALE		
-			-				SHEET		
-			-				2 OF 2		
-			-				REV		
-			-				G		