


Data sheet

1200.2 TSK 2,5/T BG

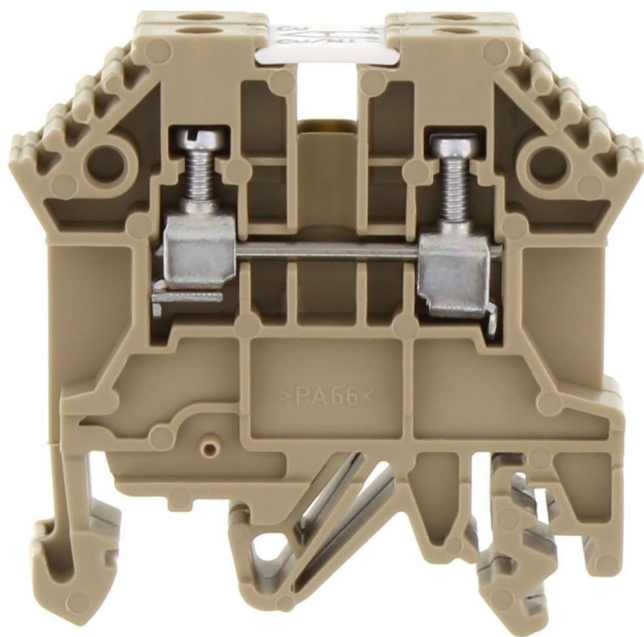

Terminal block for temperature measuring circuits, Screw connection, Mounting type:Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 10 mm, Colour: Beige

Business data

Article number	1200.2
Article name	TSK 2,5/T BG
GTIN (EAN)	4044211027667
Colour	Beige
Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	13 g
Weight per piece (including packaging)	14.56 g
Unit of weight	G
Customs number	85369010
Country of origin	DE
Product description	Terminal block for temperature measuring circuits

Data sheet

1200.2 TSK 2,5/T BG

Technical data

Dimensions

Length	48 mm
Width	10 mm
Height TS 35/7.5	47 mm
Height TS 32	51.5 mm

Ratings

Rated cross-section	2.5 mm ²
Overvoltage category	III
Contamination degree	3

Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	4
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm ²
Wire cross-section single core (rigid)/stranded, max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	12
Stripping length	7 mm
Screw head	Slotted
Screw threading	M 2,5
Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.8 Nm

Data sheet

1200.2 TSK 2,5/T BG

Technical data

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C
Busbar	Copper / Constantan

Further technical data

Mounting type	Mounting rail TS 35/7.5 and TS 32
Gauge plug acc. to EN 60 947-1	A3
End plate required	✓
Type of thermocouple	Cu/CuNi 44

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2022-06-10
REACH Candidate Substance Note	No
RoHS Conform	yes

Data sheet

1200.2 TSK 2,5/T BG




Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
EAC approval granted	yes

Media

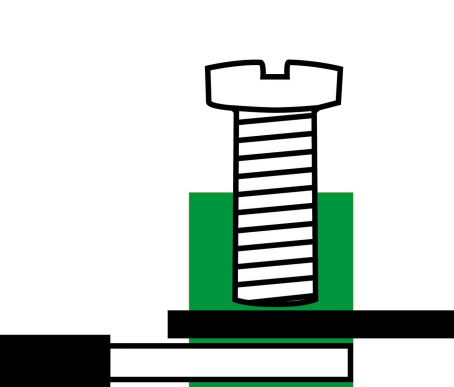

M2.5

A detailed technical drawing of a screw head and thread. The head is shown in a perspective view, and the thread is shown in a cross-section view.

EAC

Data sheet

1200.2 TSK 2,5/T BG

Accessories


End plate



End plate, Width: 1.5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2001.2</u>	AP 2,5-10 BG	4044211047979	50

End stop



End stop, Mounting type: Mounting rail TS 35/7.5, Width: 9.5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2828.0</u>	ES 35/K/ST BG	4044211055547	50

Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 5 mm, Colour: White

Article number	Article name	GTIN (EAN)	Packaging unit
<u>4600.7</u>	PMC SB 5/50 WH	4044211088903	500 ST

Screwdriver



Screwdriver with bare blade, Colour: Black-grey

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1085.0</u>	SDB 0,5x3,0	4044211014643	1 ST

Data sheet

1200.2 TSK 2,5/T BG



Partition plate



Partition plate, Width: 1.5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>2002.2</u>	TW 2,5-10 BG	4044211048044	50