


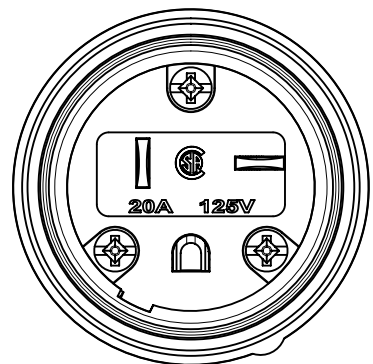


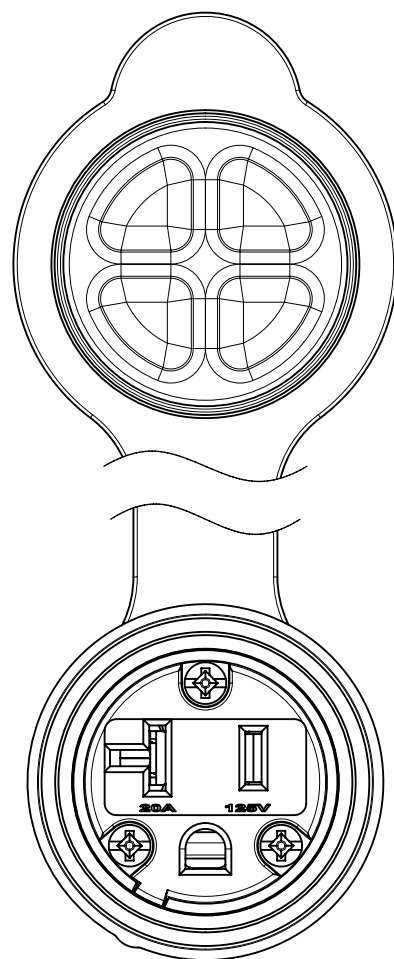

NEMA 5-20P PRIMARY
WOODHEAD #14W33 PLUG

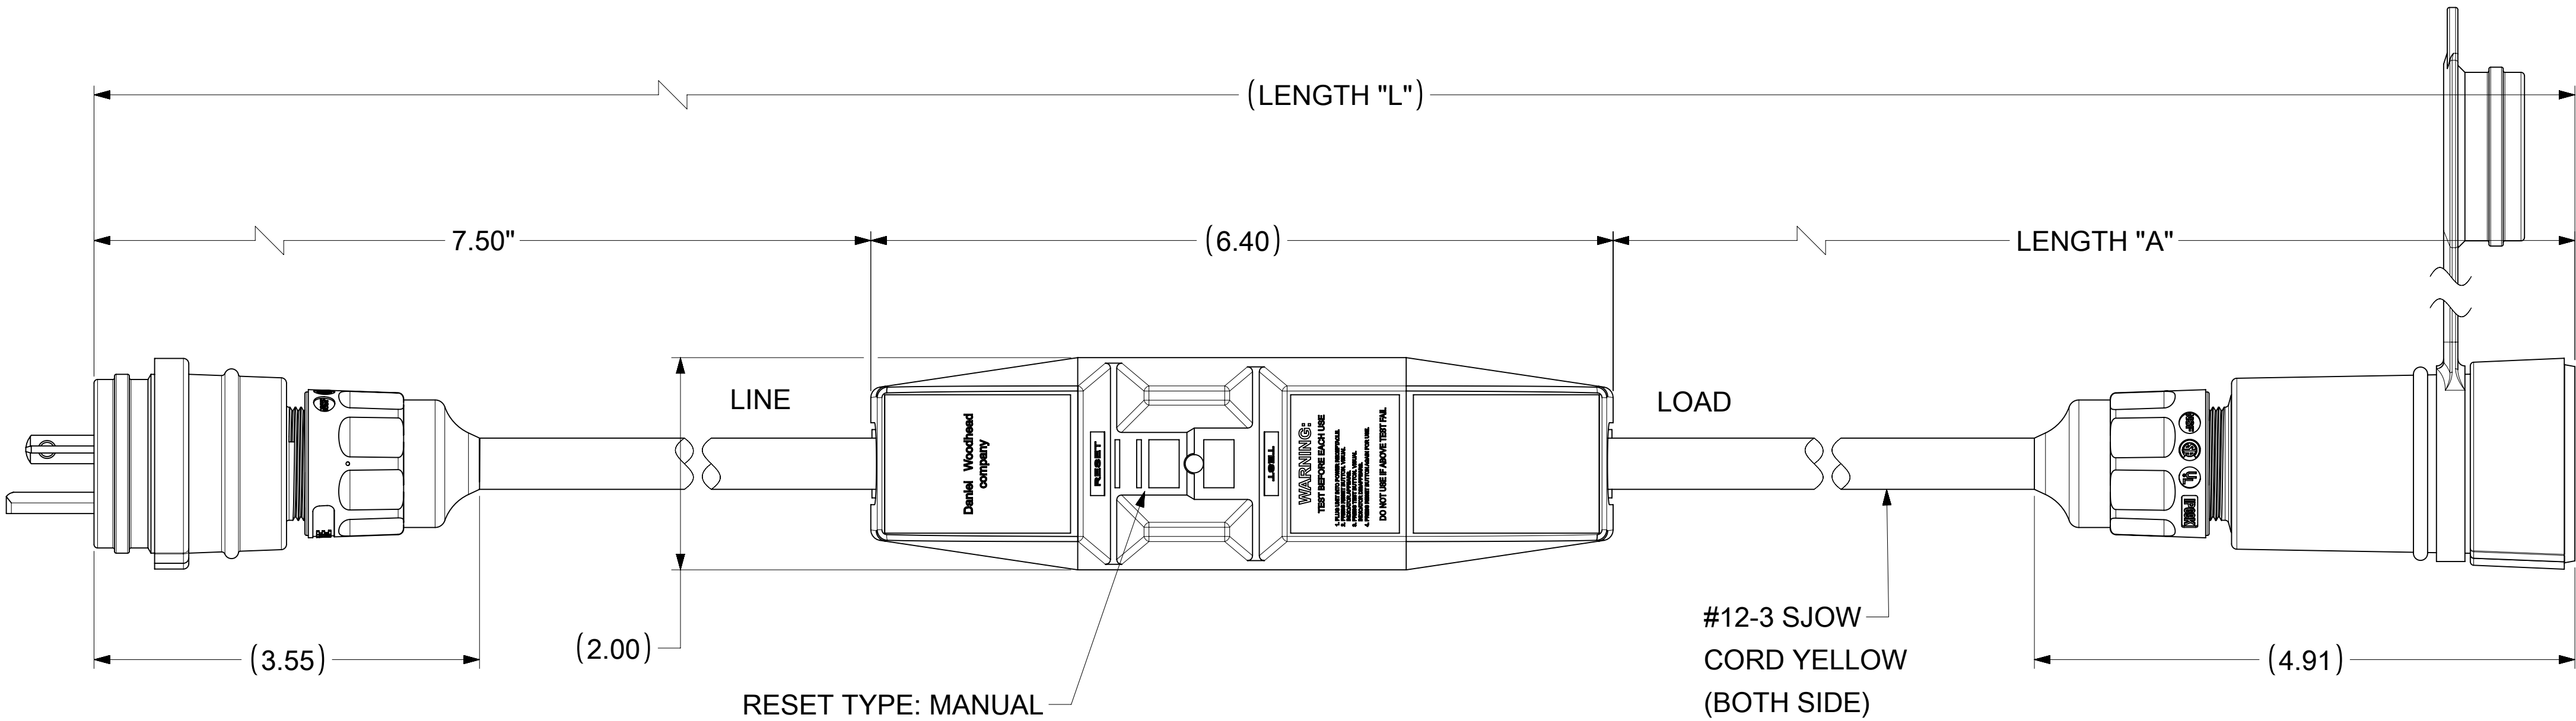

NEMA 5-20R SECONDARY
WOODHEAD #15W33 CONNECTOR

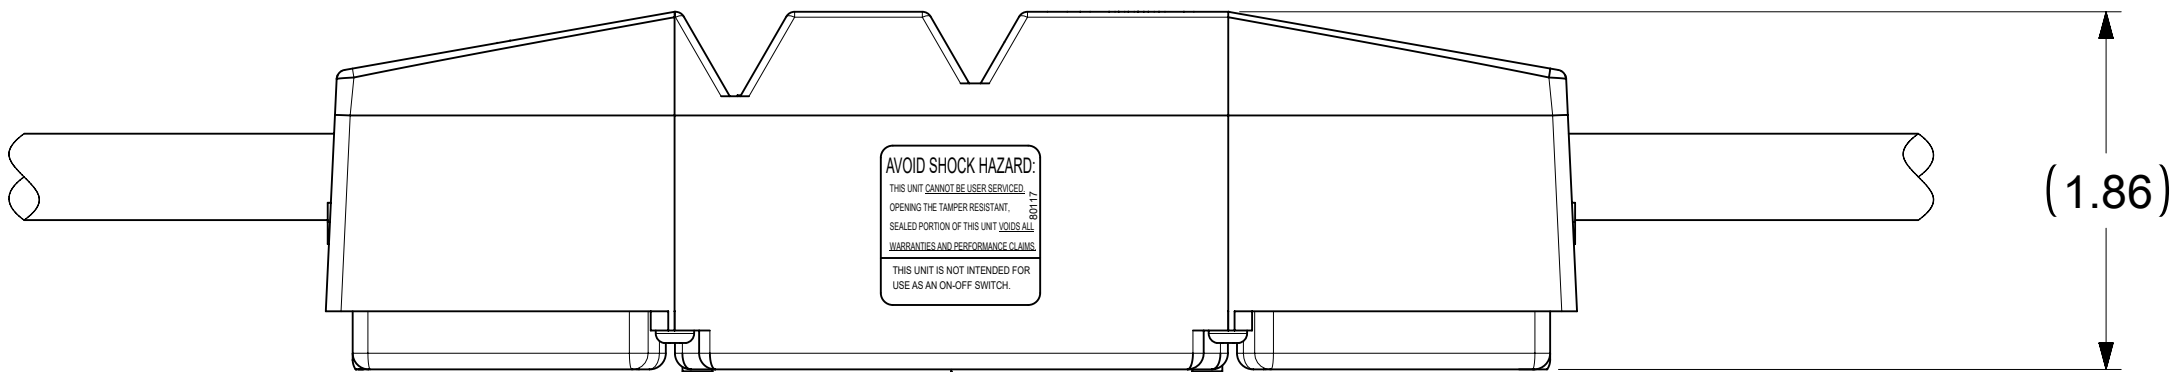

INLINE GFCI

TECHNICAL

LISTED:	cULus
RATED SUPPLY VOLTAGE:	120 VAC
RATED CURRENT:	UP TO 20 AMPS
RESET TYPE:	MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	4-6 mA
OVERLOAD CURRENT:	120 AMP
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	NEMA 3R

MATERIAL NO.	ENGINEERING NO.	LENGTH "A"	LENGTH "L"
1301530122	20052-1	9.50 IN.	1 FT. 11.4 IN
1301530125	20052-1-LSS	9.50 IN.	1 FT. 11.4 IN
1301530127	20052-25	23 FT. 10.5 IN.	25 FT. 0.4 IN.
1301530129	20052-25-LSS	23 FT. 10.5 IN.	25 FT. 0.4 IN.
1301530131	20052-6	4 FT. 10.5 IN.	6 FT. 0.4 IN.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
F A = 0 F C = 0 F P = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC: NEW SALES DRAWING CREATED			molex GFCI INLINE 20A, 120V ATTACHABLE W/PLUG & CONN. WATERTITE PRODUCT CUSTOMER DRAWING					
	INCH		NTS										
	GENERAL TOLERANCES (UNLESS SPECIFIED)												
DIVISIONAL SYMBOLS	ANGULAR TOL		±		°		EC NO: 693149						
	4 PLACES		±				DRWN: PPURSUTANDEL			2021/12/08			
	3 PLACES		±				CHK'D: DNGUYEN62			2022/01/26			
	2 PLACES		±				APPR: HKNEELAND			2022/04/28			
	1 PLACE		±				INITIAL REVISION:						
	0 PLACES		±				DRWN: AL			2003/10/07			
							APPR:						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
				D-SIZE		130153		SEE TABLE		GENERAL MARKET		1 OF 1	

molex

GFCI INLINE 20A, 120V ATTACHABLE
W/PLUG & CONN. WATERTITE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1301530122	PSD	000	A

DOCUMENT STATUS	P1	RELEASE DATE	2022/04/28	15:45:39
-----------------	----	--------------	------------	----------