


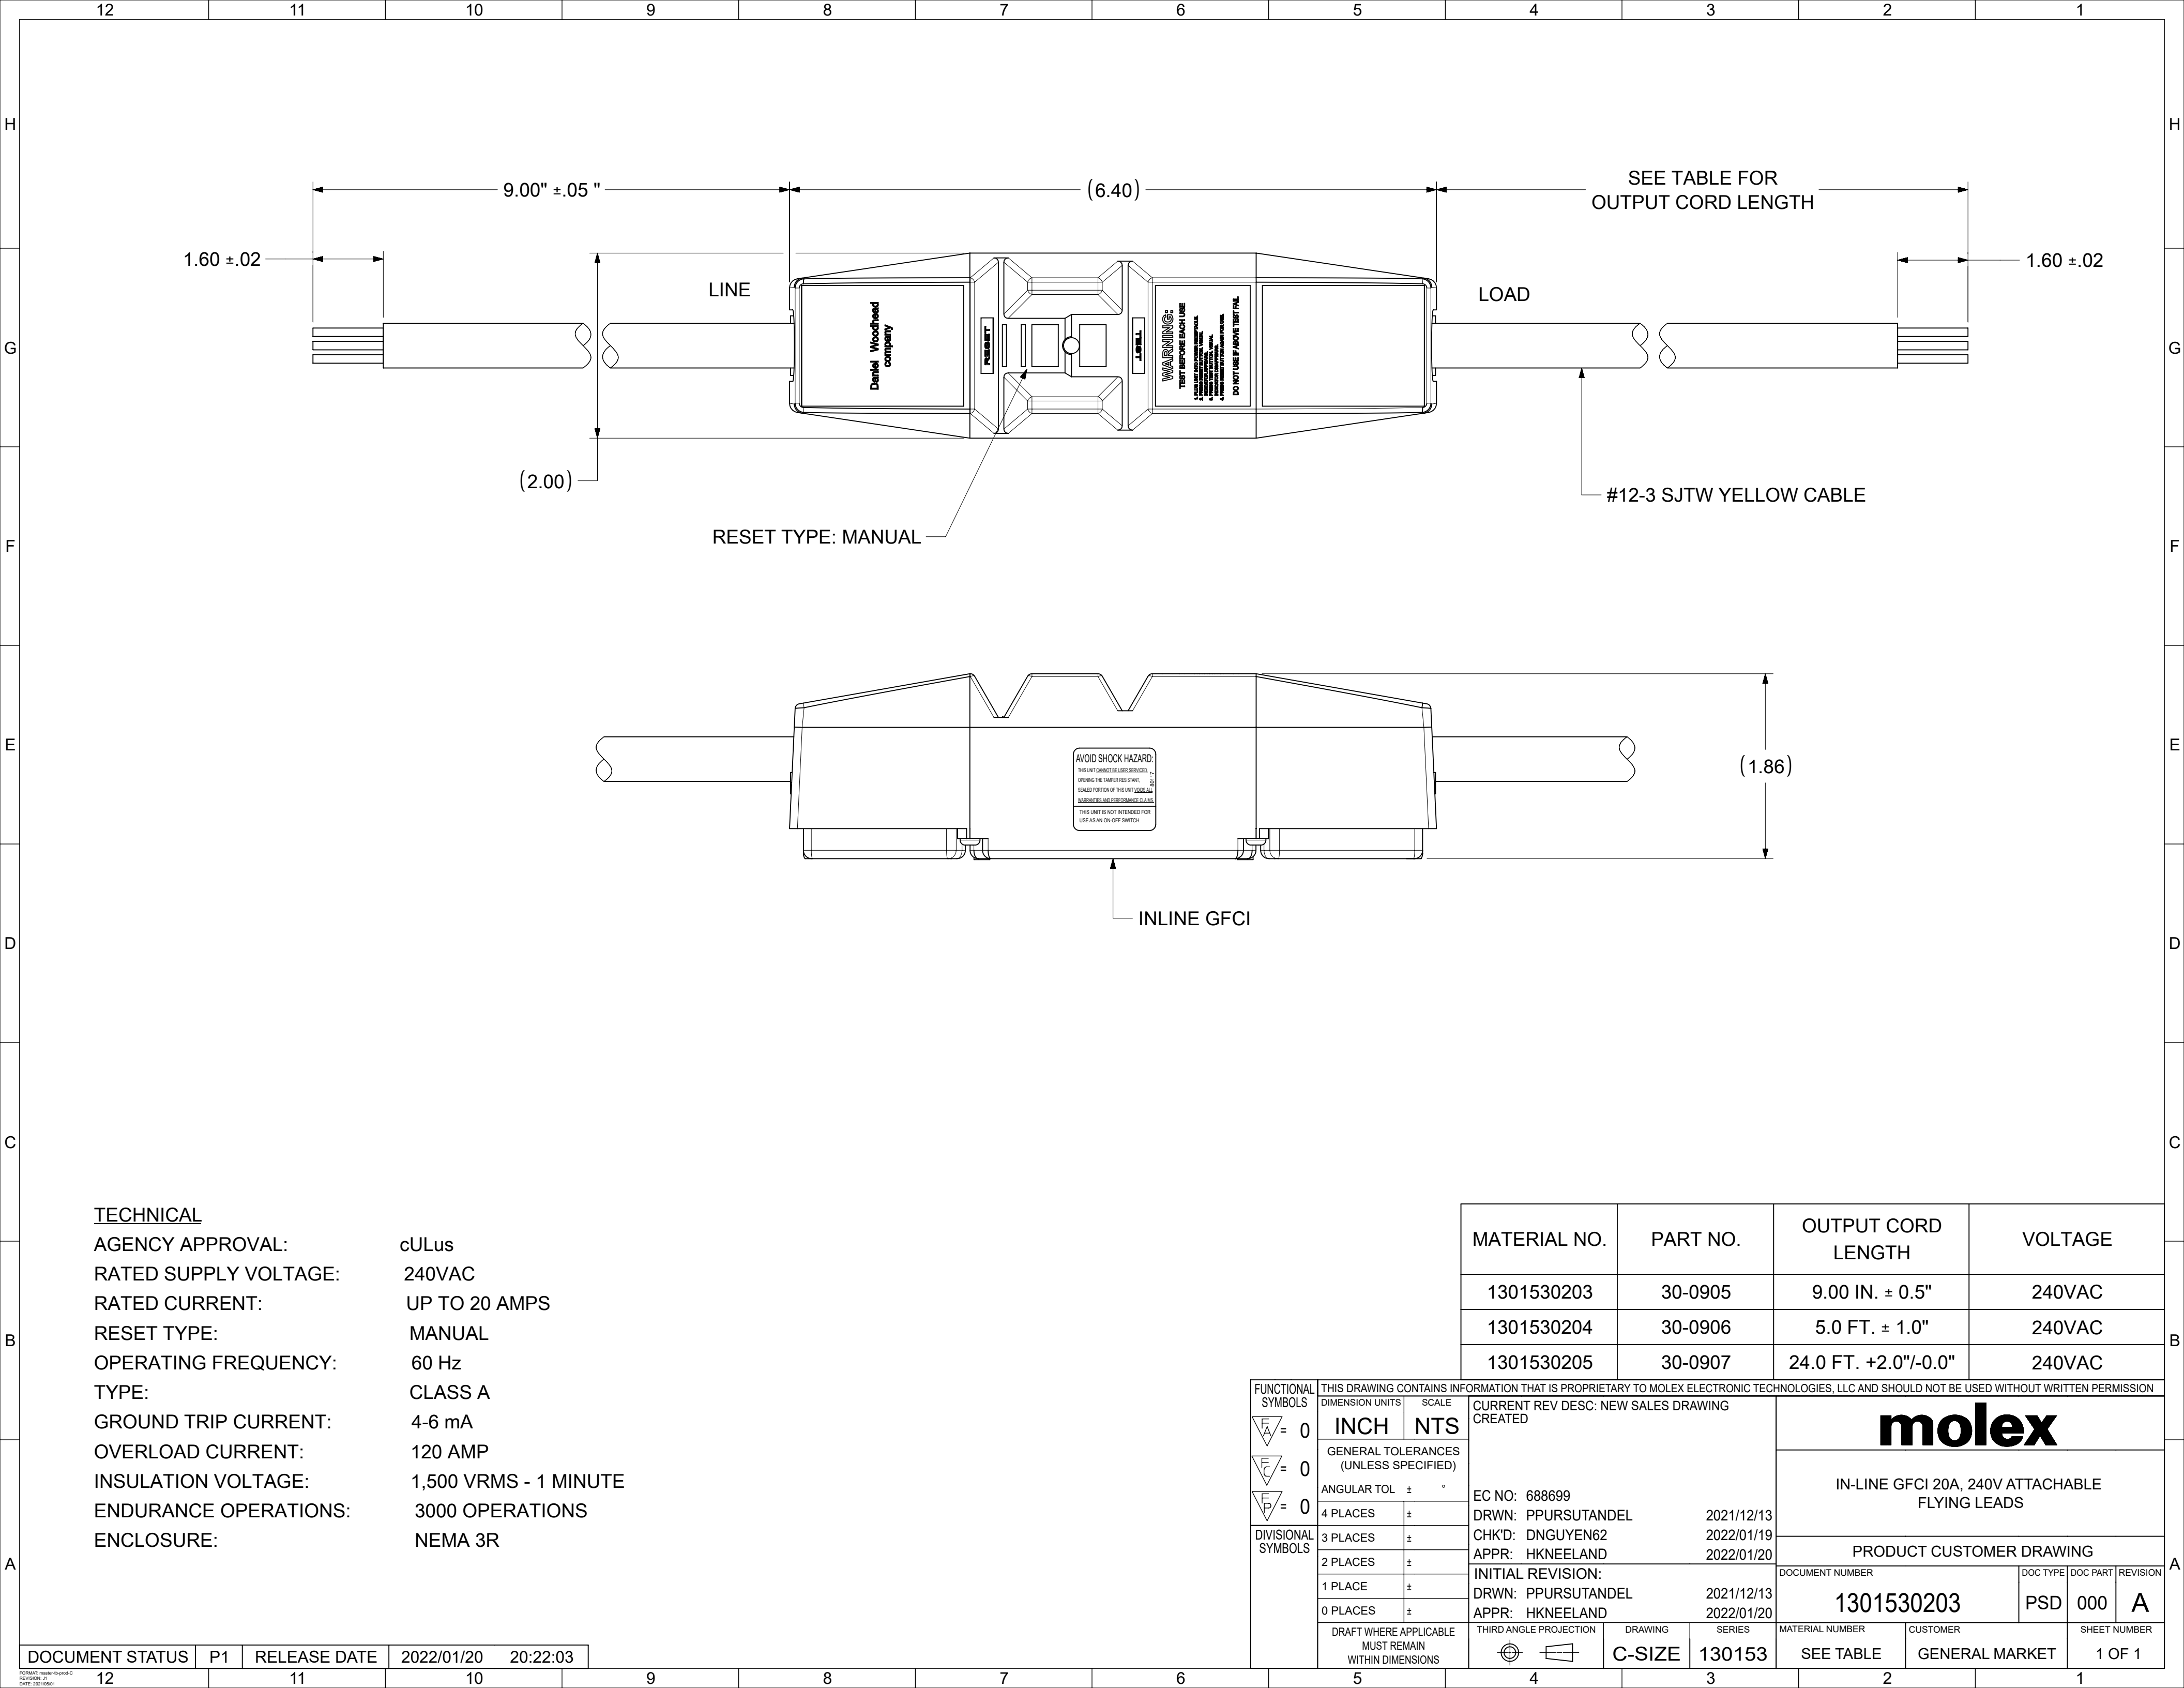

TECHNICAL

AGENCY APPROVAL:	cULus
RATED SUPPLY VOLTAGE:	240VAC
RATED CURRENT:	UP TO 20 AMPS
RESET TYPE:	MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	4-6 mA
OVERLOAD CURRENT:	120 AMP
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	NEMA 3R

MATERIAL NO.	PART NO.	OUTPUT CORD LENGTH	VOLTAGE
1301530203	30-0905	9.00 IN. ± 0.5"	240VAC
1301530204	30-0906	5.0 FT. ± 1.0"	240VAC
1301530205	30-0907	24.0 FT. +2.0"/-0.0"	240VAC

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: NEW SALES DRAWING CREATED				DOCUMENT NUMBER				DOC TYPE		DOC PART		REVISION
	DIMENSION UNITS	SCALE													
$\frac{F}{A} = 0$	INCH	NTS	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 688699				PSD		000		A
$\frac{F}{C} = 0$															
$\frac{F}{P} = 0$			ANGULAR TOL ± °				DRWN: PPURSUTANDEL 2021/12/13				1301530203		GENERAL MARKET		1 OF 1
DIVISIONAL SYMBOLS	4 PLACES	±	DRWN: PPURSUTANDEL 2021/12/13				CHK'D: DNGUYEN62 2022/01/19				SEE TABLE		GENERAL MARKET		1 OF 1
	3 PLACES	±													
	2 PLACES	±													
	1 PLACE	±													
	0 PLACES	±	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION				C-SIZE		130153		1 OF 1