
KIKI-A

~165° wide beam. Assembly with installation tape.

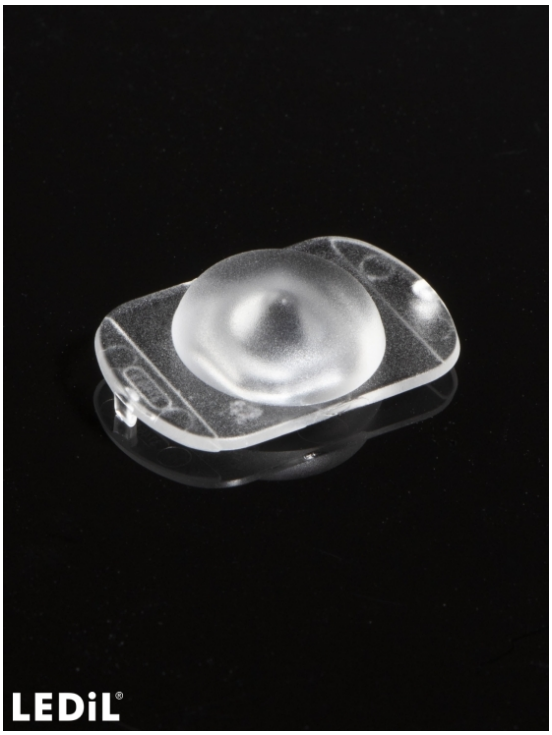

TECHNICAL SPECIFICATIONS:

Dimensions	21.6 x 14.0 mm
Height	5.9 mm
Fastening	tape, pin
ROHS compliant	yes


MATERIAL SPECIFICATIONS:


Component	Type	Material	Colour	Finish
KIKI-A	Single lens	PMMA	clear	
SIRI-TAPE-3	Tape			

ORDERING INFORMATION:


Component		Qty in box	MOQ	MPQ	Box weight (kg)
CA13747_KIKI-A	Single lens	4032	378	126	3.5
» Box size: 451 x 254 x 152 mm					


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

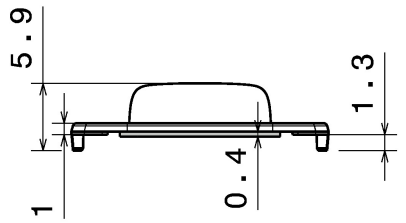



Isometric view

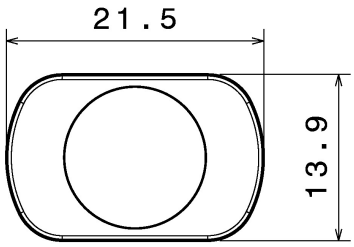

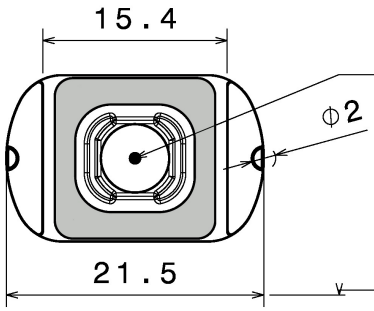

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	C13746	KIKI-A	PMMA	CLEAR
2	C16797	SIRI-TAPE-3	ADHESIVE TAPE	BLACK

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures:
Up to 30mm class M, otherwise class C.
According to DIN ISO 2768-2
Form and position: class L

Ledil Oy
Joensuunkatu 13
FIN 24100 SALO
Finland

THIRD ANGLE PROJECTION:

DRAWING TITLE
CA13747_KIKI-A

This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy."

SIZE A4 | PART NUMBER CA13747

SCALE 2:1 | WEIGHT - | SHEET 1/1


See also our general installation guide: www.ledil.com/installation_guide

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (MEASURED):


LUMILEDS

LED	LUXEON T
FWHM / FWTM	162.0° / 183.0°
Efficiency	91 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

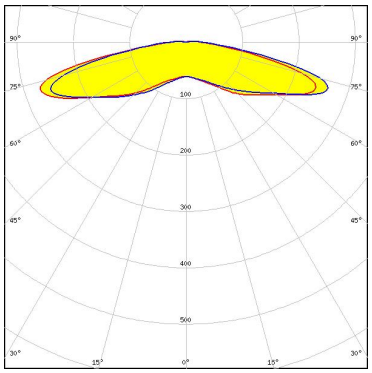


LUMILEDS

LED	LUXEON TX
FWHM / FWTM	162.0° / 185.0°
Efficiency	90 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

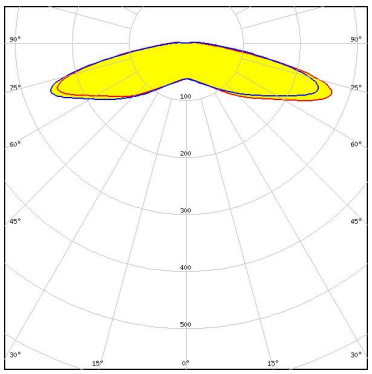


NICHIA

LED	NVSxx19B/NVSxx19C
FWHM / FWTM	161.0° / 181.0°
Efficiency	88 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

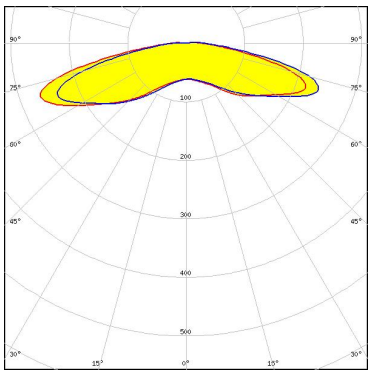

OSRAM
Opto Semiconductors

LED	OSLON Square PC
FWHM / FWTM	161.0° / 180.0°
Efficiency	88 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

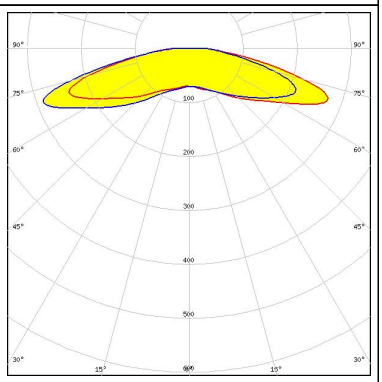


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):


CREE LED

LED	J Series 2835
FWHM / FWTM	158.0° / 171.0°
Efficiency	95 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

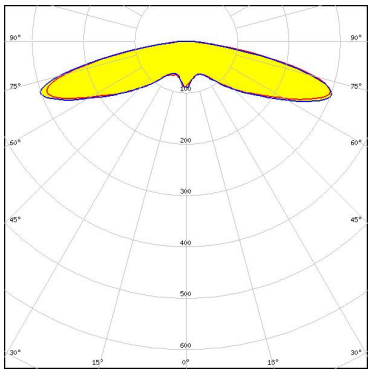


CREE LED

LED	J Series 3030
FWHM / FWTM	155.0° / 167.0°
Efficiency	94 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

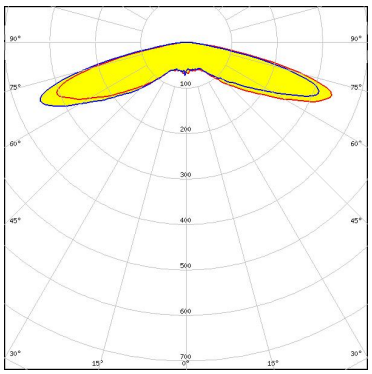


NICHIA

LED	NFSx757G
FWHM / FWTM	158.0° / 170.0°
Efficiency	95 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

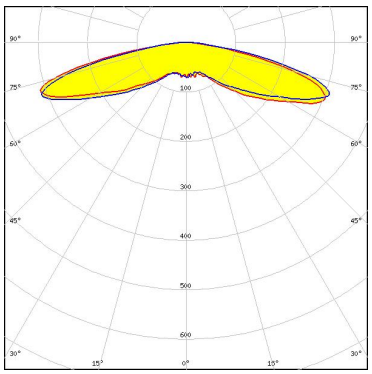

SAMSUNG

LED	LM28xB Series
FWHM / FWTM	157.0° / 172.0°
Efficiency	96 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

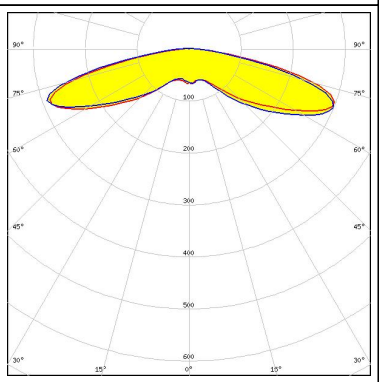


LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):


SAMSUNG

LED	LM301B
FWHM / FWTM	158.0° / 170.0°
Efficiency	94 %
Peak intensity	0.3 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

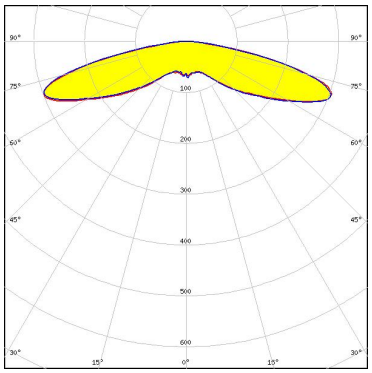

SEOUL SEMICONDUCTOR

LED	Z8Y11
FWHM / FWTM	152.0° / 165.0°
Efficiency	93 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

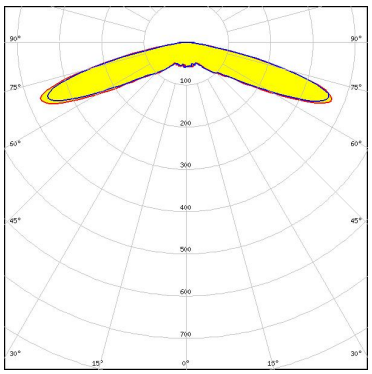

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy
Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.
228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.
405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support
www.ledil.com/
where_to_buy

Shipping locations
Salo, Finland
Hong Kong, China

Distribution Partners
www.ledil.com/
where_to_buy

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.