

Data sheet

15302.2 SD-B25C



Interface module for D-SUB, Screw connection and female D-SUB plug-in connector, Mounting type: Mounting rail TS 35, No. of poles: 25

Business data

Article number	15302.2
Article name	SD-B25C
GTIN (EAN)	4044211047047
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	107.7 g
Weight per piece (including packaging)	171.5 g
Unit of weight	G
Customs number	85369010
Country of origin	NL
Product description	Interface module

Data sheet

15302.2 SD-B25C

Technical data

Dimensions

Length	47 mm
Width	78 mm
Height TS 35/7.5	61 mm

Ratings

Overvoltage category	III
Contamination degree	2

Connection data

Connection principle	Screw connection
Number of connections	1
No. of poles	25
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	2.5 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	7 mm
Torque	0.6 Nm

Input data

Max. operating voltage AC/DC	125 V
Current load per channel, max.	1,5 A

Materials

Working temperature, min.	-20 °C
Working temperature, max.	50 °C

Further technical data

Mounting type	TS 35
Connector type	D-sub female socket block
Test voltage	0.67 kV
Shielded	✓

Data sheet

15302.2 SD-B25C



Technical data

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2022-06-10
REACH Candidate Substance Note	No
RoHS Conform	yes

Data sheet

15302.2 SD-B25C



Approvals


Standards and regulations

Standards / specifications	DIN VDE 0110 / EN 50178
----------------------------	-------------------------

Data sheet

15302.2 SD-B25C

Media

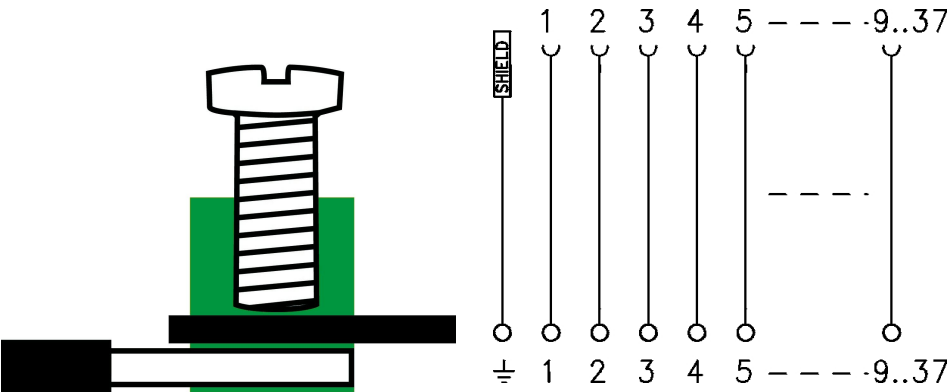

Accessories
