

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.


REVISIONS
変更

P	LTR	DESCRIPTION	DATE	DWN	APVD
	G	REVISED PER ECR-22-142637	16JUN2022	RI	TS

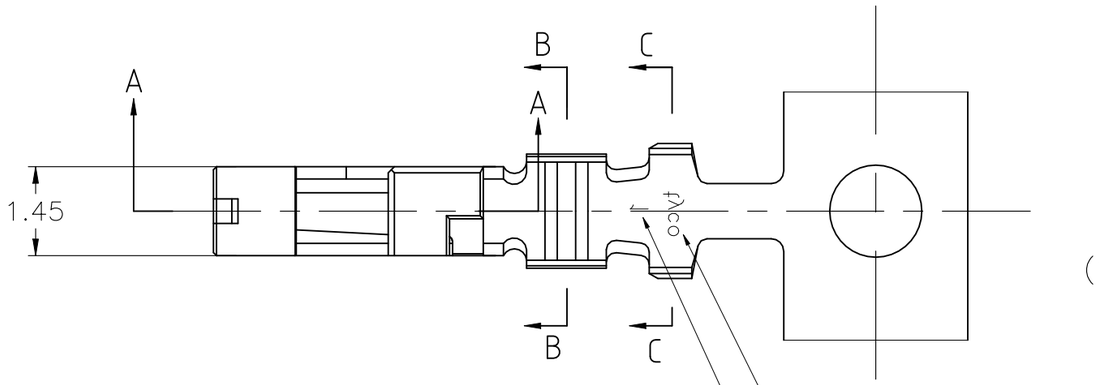






B-B



C-C

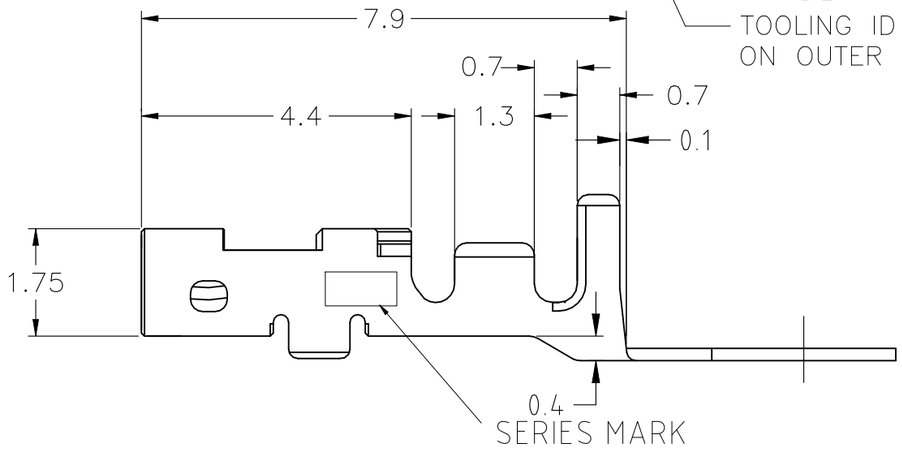



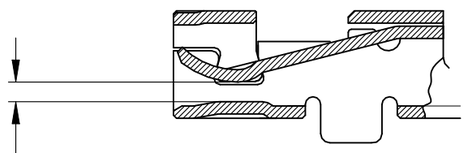

A-A

SERIES MARK	WIRE RANGE	INSULATION DIA	MATERIAL	PART No.
D M 4	AWG#28～#22 0.08～0.38mm²	φ1.08~φ1.6	COPPER ALLOY,FINISH:CONTACT AREA Au 0.2μm MIN,OVER Ni 1.27μm MIN	1827570-4
D M	AWG#28～#22 0.08～0.38mm²	φ1.08~φ1.6	COPPER ALLOY,FINISH:CONTACT AREA Au 0.38μm MIN,OVER Ni 1.27μm MIN	1827570-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位： 耗 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差

0 PLC	± 0.3
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	± 3deg

MATERIAL 材料

FINISH 仕上

DWN T.KUDO 04MAR2005
CHK D.MITSUGI 04MAR2005
APVD D.MITSUGI 04MAR2005
PRODUCT SPEC 製品規格 108-78268
APPLICATION SPEC 取付適用規格 114-5377
WEIGHT —

TE Connectivity

NAME 名称: DYNMIC D1000 SERIES REC CONTACT M TYPE REEL

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3	00779	C-1827570	—

CUSTOMER DRAWING

SCALE 尺度 10:1 | SHEET 1 OF 1 | REV G