

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST
J	-

REVISIONS 変更


P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REVISED PER ECR-22-142637	16JUN2022	RI	TS



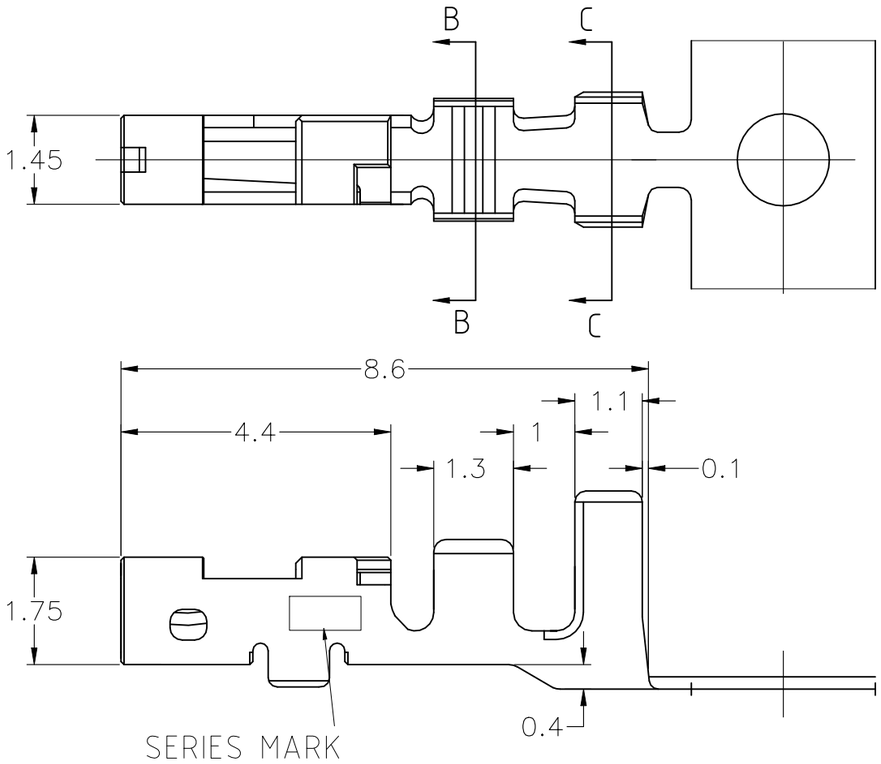




B-B



C-C

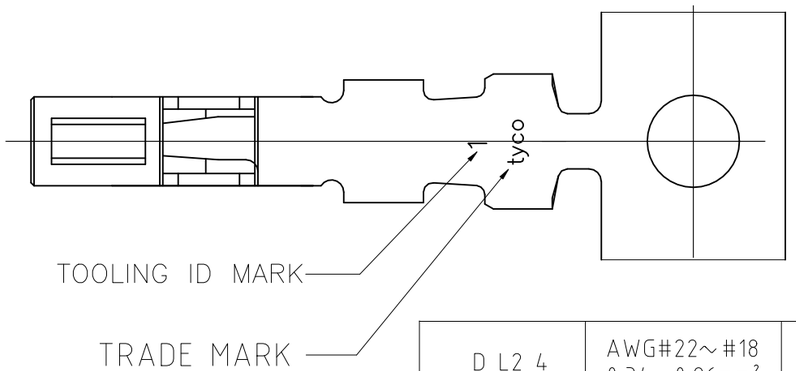

1. APPLICATION REC HSG IS APPLIED TO THE PRODUCT OF 2.5mm PITCH OR MORE OF DYNAMIC D1000 SERIES. 2.0mm PITCH CANNOT BE USED.

SERIES MARK	WIRE RANGE	INSULATION DIA	MATERIAL	PART No.
D L2 4	AWG#22～#18 0.34～0.86mm²	φ1.4~φ2.2	COPPER ALLOY,FINISH:CONTACT AREA Au 0.2μm MIN,OVER Ni 1.27μm MIN	1827570-4
D 2L	AWG#22～#18 0.34～0.86mm²	φ1.4~φ2.2	COPPER ALLOY,FINISH:CONTACT AREA Au 0.38μm MIN,OVER Ni 1.27μm MIN	1827571-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位： 粍 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差
0 PLC ± 0.3
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±3deg

MATERIAL 材料 -
FINISH 仕上 -

DWN T.KUDO 04MAR2005
CHK D.MITSUGI 04MAR2005
APVD D.MITSUGI 04MAR2005
PRODUCT SPEC 製品規格 108-78268
APPLICATION SPEC 取付適用規格 114-5377
WEIGHT 0

TE Connectivity

NAME 名称
DYNAMIC D1000 SERIES
REC CONTACT (2L TYPE) REEL

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3	00779	C-1827572	—

CUSTOMER DRAWING | SCALE 尺度 10:1 | SHEET 1 OF 1 | REV E