
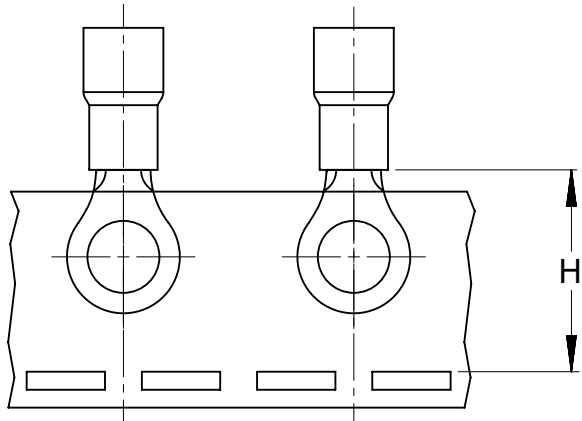


10	9	8	7	6	5	A2	4	3	2	1
MATERIAL NO., LOOSE PC		ENGINEERING P/N	MATERIAL NO. (TAPE)	ENGINEERING P/N	W ±.010	C MIN	"L" MAX	THKNS, REF	S ±.005	H NOMINAL
F	190670001	D-950-06	---- A2	----	.468/11.89	.380/9.65	1.41 (35.8)	.045/1.14	.146/3.71	-
	190670003	D-950-08	190670005	D-950-08T	.468/11.89	.380/9.65	1.41 (35.8)	.045/1.14	.173/4.39	1.07/27.2
	190670006	D-950-10	190670007	D-950-10T	.468/11.89	.380/9.65	1.41 (35.8)	.045/1.14	.198/5.03	
	190670008	D-950-14	190670011	D-950-14T	.468/11.89	.380/9.65	1.41 (35.8)	.045/1.14	.265/6.73	
E	190670012	D-950-56	190670013	D-950-56T	.468/11.89	.380/9.65	1.41 (35.8)	.045/1.14	.328/8.33	1.07/27.2
	190670016	D-951-10	190670017	D-951-10T	.588/14.94	.445/11.30	1.54 (39.1)	.045/1.14	.198/5.03	
	190670018	D-951-14	---- A2	----	.588/14.94	.445/11.30	1.54 (39.1)	.045/1.14	.265/6.73	-
	190670025	D-951-56	190670026	D-951-56T	.588/14.94	.445/11.30	1.54 (39.1)	.045/1.14	.328/8.33	1.07/27.2
D	190670022	D-951-38	190670024	D-951-38T	.588/14.94	.445/11.30	1.54 (39.1)	.045/1.14	.390/9.91	
	190670128	D-951-76	---- A2	----	.588/14.94	.445/11.30	1.54 (39.1)	.045/1.14	.453/11.51	-
	190670030	D-952-38	-	-	.810/20.57	.628/15.95	1.84 (46.7)	.050/1.27	.390/9.91	-
	190670031	D-952-76	-	-	.810/20.57	.628/15.95	1.84 (46.7)	.050/1.27	.453/11.51	-
D	190670028	D-952-12	190670328	D-952-12T	.810/20.57	.628/15.95	1.84 (46.7)	.050/1.27	.515/13.08	1.40/35.6
	190670129	D-952-58	---- A2	----	.810/20.57	.628/15.95	1.84 (46.7)	.050/1.27	.656/16.66	-
	190670032	D-953-12	-	-	1.125/28.58	1.005/25.53	2.37 (60.2)	.050/1.27	.515/13.08	-
	190670034	D-953-58	-	-	1.125/28.58	1.005/25.53	2.37 (60.2)	.050/1.27	.656/16.66	-
D	190670033	D-953-34	-	-	1.125/28.58	1.005/25.53	2.37 (60.2)	.050/1.27	.781/19.84	-
	190670035	D-956-06	---- A2	----	.374/9.50	.380/9.65	1.36 (34.5)	.045/1.14	.146/3.71	-
	190670037	D-956-08	190670038	D-956-08T	.374/9.50	.380/9.65	1.36 (34.5)	.045/1.14	.173/4.39	1.07/27.2
	190670039	D-956-10	190670040	D-956-10T	.374/9.50	.380/9.65	1.36 (34.5)	.045/1.14	.198/5.03	
D	190670041	D-956-14	190670042	D-956-14T	.374/9.50	.380/9.65	1.36 (34.5)	.045/1.14	.265/6.73	

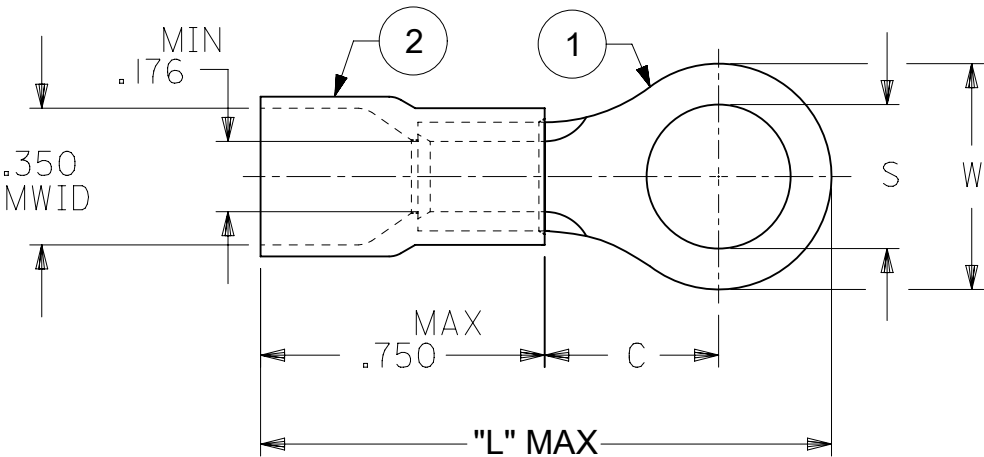

FOR TAPE APPLIED
PART NUMBERS

NOTE(S):

1. MATERIAL: ITEM ① - COPPER, ELECTRO-TIN PLATED
ITEM ② - MOLDED NYLON, RED
2. ASSEMBLY IS RoHS COMPLIANT.
3. MWID = MAXIMUM WIRE INSULATION DIAMETER.

FUNCTIONAL SYMBOLS F A = 0 F C = 0 F D = 0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
	DIMENSION UNITS		SCALE		CURRENT REV DESC: OAL "L" DIM'S UPDATED											
	mm		NTS		molex RING TONGUE TERMINAL, FUNNEL ENTRY NYLAKRIMP, 8 AWG											
	GENERAL TOLERANCES (UNLESS SPECIFIED)															
			MM	INCH												
	4 PLACES	±		±												
DIVISIONAL SYMBOLS	3 PLACES	±		±	EC NO: 682401		2021/10/21		PRODUCT CUSTOMER DRAWING							
	2 PLACES	±		±	DRWN: DMYRICK		2021/10/25									
	1 PLACE	±		±	CHK'D: KBURROUGHS		2021/10/25		DOCUMENT NUMBER							
	0 PLACES	±		±	APPR: KBURROUGHS		2021/10/25		SD-19067-017							
	INITIAL REVISION:				DRWN: EHILE		2007/08/22		DOC TYPE							
	ANGULAR TOL ± °				APPR: JMACNEIL		2007/09/19		DOC PART							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER						
							B-SIZE	19067	SEE CHART	GENERAL MARKET						
									SHEET NUMBER							
									1 OF 1							