SIEMENS

## Data sheet 3VA9134-0JJ12



wire connector large 4 units accessory for: 3VA5 125

| | |
|---|---|
| **Model** | |
| product brand name | SENTRON |
| product designation | accessories |
| Product version | circular conductor terminal |
| Accessories | Wire connector |
| **General technical data** | |
| designation / of the terminal | TA2.1 |
| **Voltage** | |
| **Current** | |
| **Mechanical Design** | |
| **Connections according IEC** | |
| IEC-marking / of terminals | 25-150 mm² CU/AL NNL |
| connectable conductor cross-section | |
| ● for copper cable / stranded / minimum | 25 mm² |
| ● for copper cable / stranded / maximum | 150 mm² |
| ● for aluminum cable / stranded / minimum | 25 mm² |
| ● for aluminum cable / stranded / maximum | 150 mm² |
| stripped length | 30,5 mm |
| **Connetctions according UL** | |
| UL-marking / of terminals | TA2.1 CMC 4-300 CU7AL UR CSA |
| permissible temperature / of connectable conductor / according to UL 486A-486B | 75 °C |
| stripped length | 1.2 in |
| connectable conductor cross-section | |
| ● for copper cable / stranded / minimum | 4 AWG |
| ● for copper cable / stranded / maximum | 300 kcmil |
| ● for copper cable / finely stranded / minimum | 4 AWG |
| ● for copper cable / finely stranded / maximum | 300 kcmil |
| ● for aluminum cable / stranded / minimum | 4 AWG |
| ● for aluminum cable / stranded / maximum | 300 kcmil |
| tightening torque / when using copper cables | |
| ● stranded | 4 AWG - 350 kcmil: 252 lb-in |
| ● finely stranded | 4 AWG - 350 kcmil: 252 lb-in |
| **Certificates** | |

| General Product Approval | EMC | Declaration of Conformity | Shipping Approval |
|---|---|---|---|


Subject to change without notice
© Copyright Siemens

Miscellaneous

## other


Manufacturer Declaration

Miscellaneous

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,…)**
http://www.siemens.com/lowvoltage/catalogs
**Industry Mall (Online ordering system)**
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9134-0JJ12
**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
https://support.industry.siemens.com/cs/ww/en/ps/3VA9134-0JJ12
**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9134-0JJ12
**Tender specifications**
http://www.siemens.com/specifications


Subject to change without notice
© Copyright Siemens

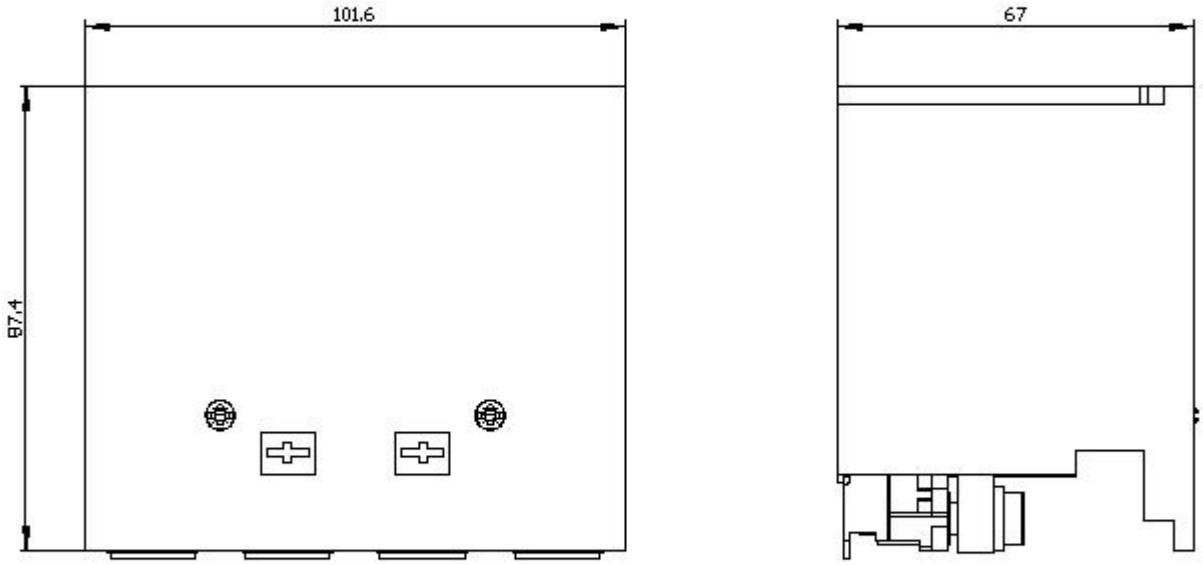


**last modified:** 12/20/2020


Subject to change without notice
© Copyright Siemens