SIEMENS

Data sheet 3RT2936-1ES00



Surge suppressor, Diode combination 30 ... 250 V DC, for contactors Size S2, S3

General technical data		
product brand name		SIRIUS
product designation		surge suppressor
size of contactor		S2, S3
design of the surge suppressor		Diode combination
ambient temperature		
● during storage	°C	-40 ... +80
● during operation	°C	-25 ... +60
Control circuit/ Control		
type of voltage of the control supply voltage		DC
control supply voltage frequency		
● 1 rated value	Hz	50
● 2 rated value	Hz	60
control supply voltage 1		
● at DC	V	30 ... 250
Installation/ mounting/ dimensions		
mounting position		any
fastening method		clip-on
width	mm	30
height	mm	30
depth	mm	14.5
Certificates/ approvals		
certificate of suitability		CE / UL / CSA / CCC


General Product Approval	EMC	Declaration of Conformity	
CSA, UR, EAC, RCM, CE EG-Konf.			Miscellaneous

Test Certificates	Shipping Approval	other	
Type Test Certificates/Test Report	BUREAU VERITAS, PRS, RMRS	Confirmation	Confirmation


Subject to change without notice
© Copyright Siemens

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2936-1ES00
Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2936-1ES00
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RT2936-1ES00
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2936-1ES00&lang=en

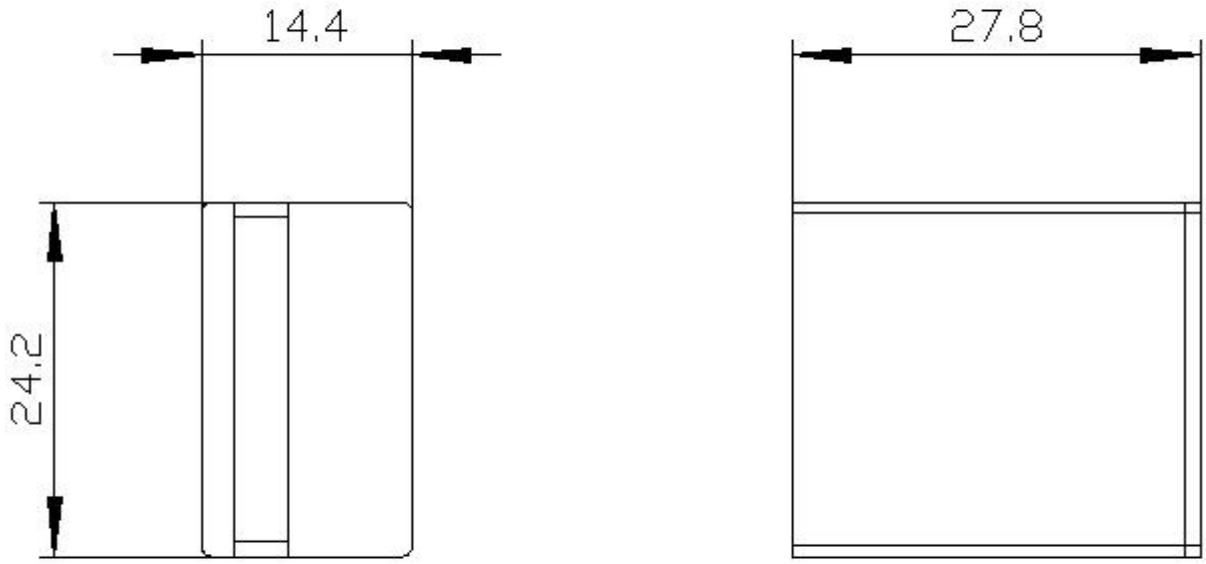

Subject to change without notice
© Copyright Siemens

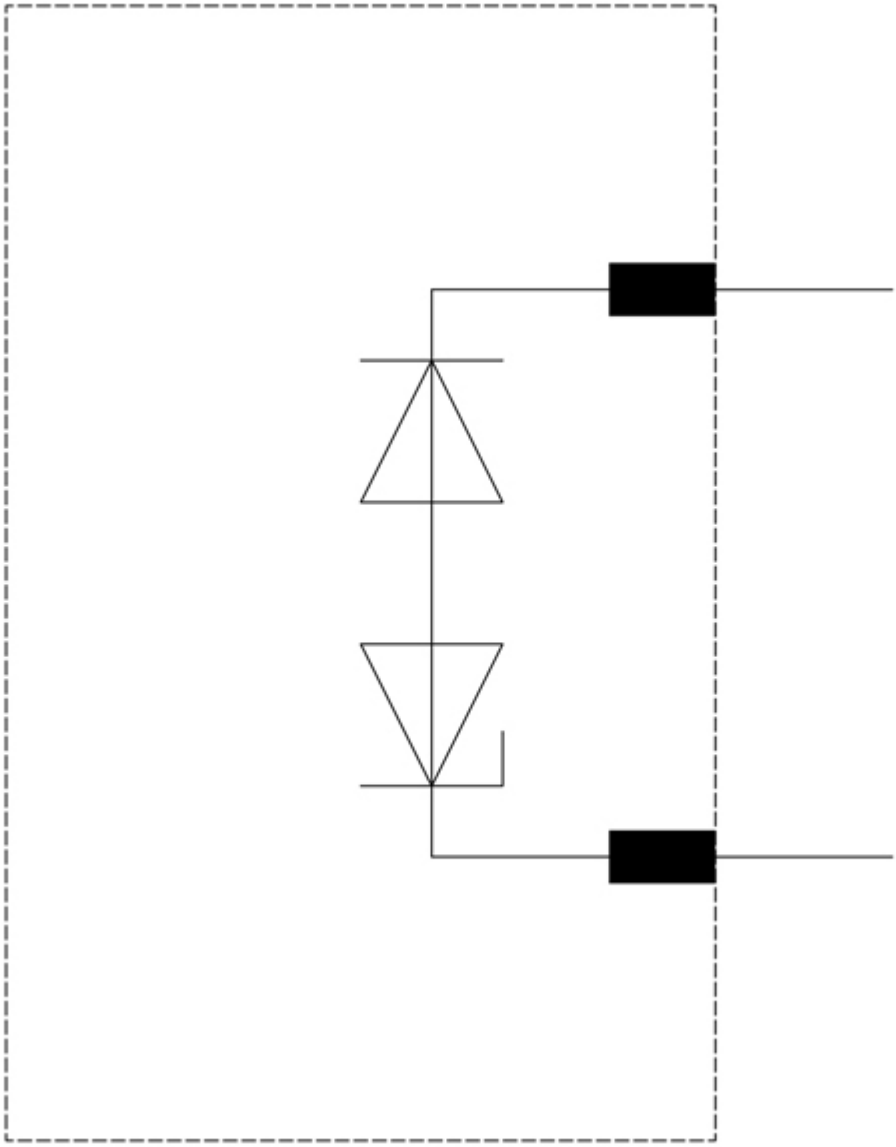

last modified: 11/18/2020

Subject to change without notice
© Copyright Siemens