

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REVISED PER ECR-21-100678	08APR2021	SS	VS
	F	REVISED PER ECR-20-100915	28APR2021	JP	VS
	G	REVISED PER ECR-22-130081	12OCT2022	SKR	DS

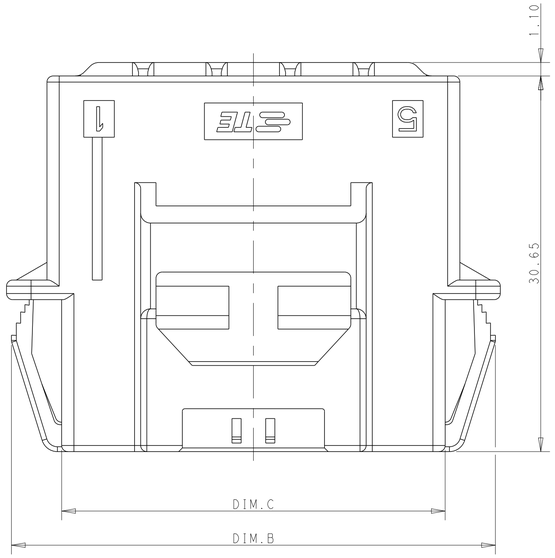


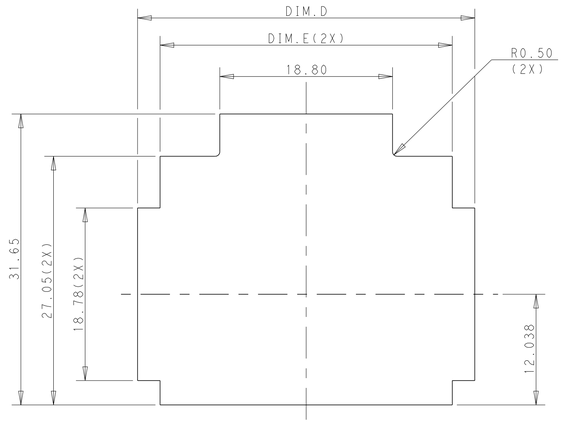



RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 3*5 AND 3*4 POSITIONS
(TOLERANCE: ±0.15mm)

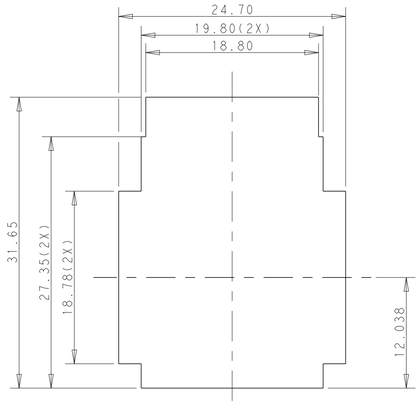


RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 3*3 POSITION
(TOLERANCE: ±0.15mm)

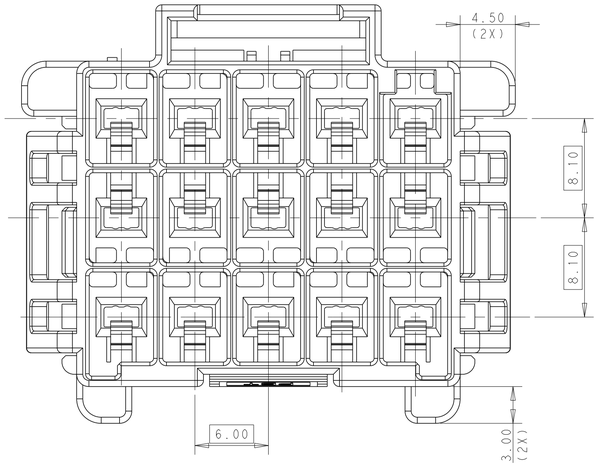

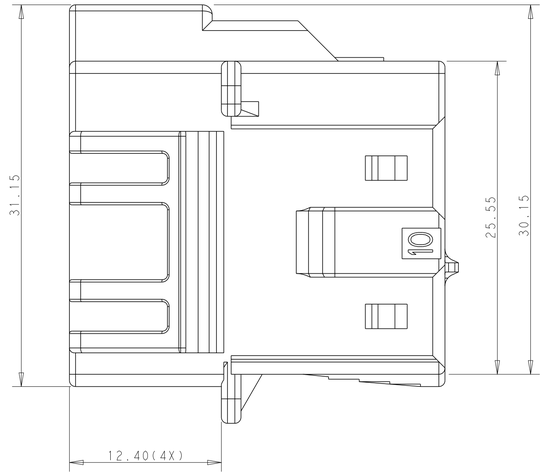

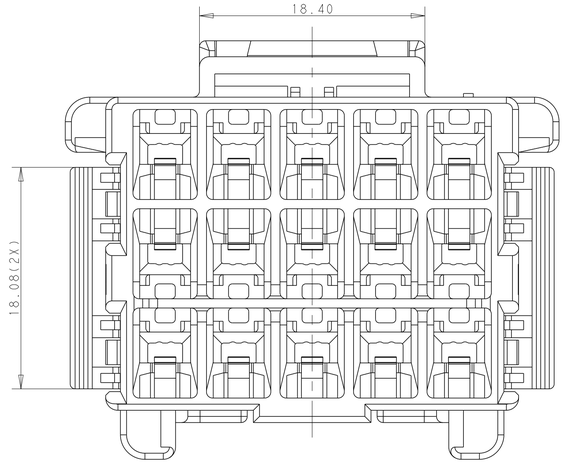

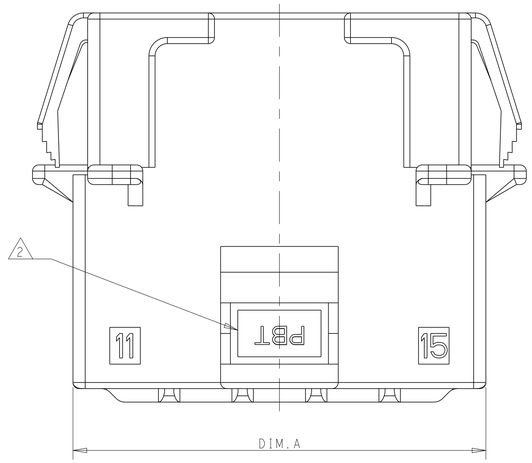

1. MATERIAL:
   LEVEL 1: PBT, STANDARD TEMPERATURE 105°C
   KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW

   LEVEL 2: PA66, HIGH TEMPERATURE 150°C
   KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL

2. MATERIAL MARK:
   LEVEL 1:PBT, LEVEL 2:HDT

3. APPLICABLE CONTACT P/N
   TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*

4. MATING CONN, P/N
   PLUG HSG:*-1971876-*
   TPA DOUBLE ROW:*-1971778-*;SINGLE ROW:*-1971777-*

5. RECOMMENDED PANEL THICKNESS:1.0-2.0mm

6. GLOW WIRE COMPLIANT IN ACCORDANCE WITH IEC 60335-1. THIS IS BASED ON THE PRODUCT MEETING A GWEPT 850°C TEST AND RESIN GWIT GREATER THAN OR EQUAL TO 775°C.

POS	A	B	C	D	E
3*5	33.70	39.5	31.30	36.70	31.80
3*4	27.70	33.5	25.30	30.70	25.80
3*3	21.70	27.5	19.30		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.35
2 PLC ±0.25
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL 1

FINISH - -

DWN TOMMY WU 06JUL2012
CHK HAPYE WU 06JUL2012
APVD YUHONG MAO 06JUL2012

TE Connectivity

NAME CAP HOUSING, PANEL MOUNT,TRIPLE ROW POWER TRIPLE LOCK

PRODUCT SPEC 108-106118
APPLICATION SPEC 114-106118
WEIGHT -


SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1971875	-


Customer Drawing | SCALE 4:1 | SHEET 1 OF 2 | REV G

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

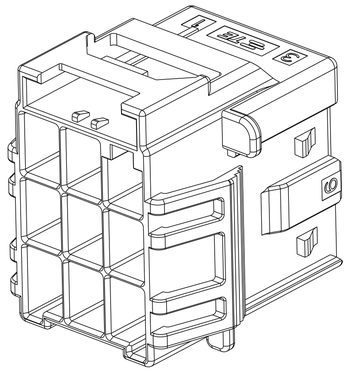





3*3 POSITIONS

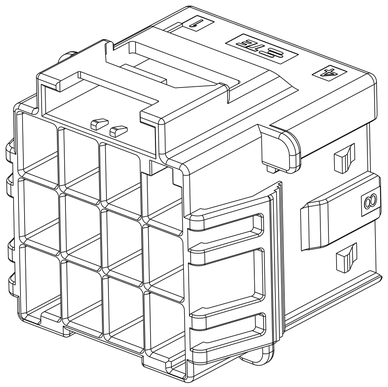




3*4 POSITIONS

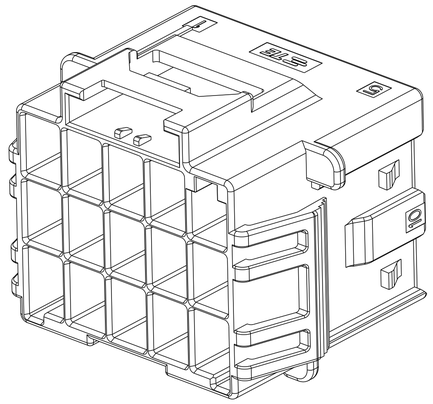


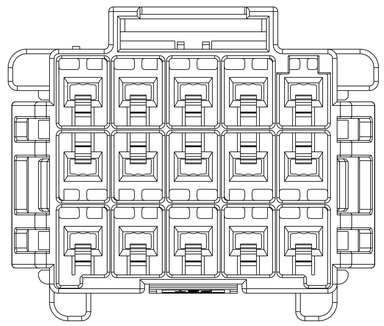


3*5 POSITIONS

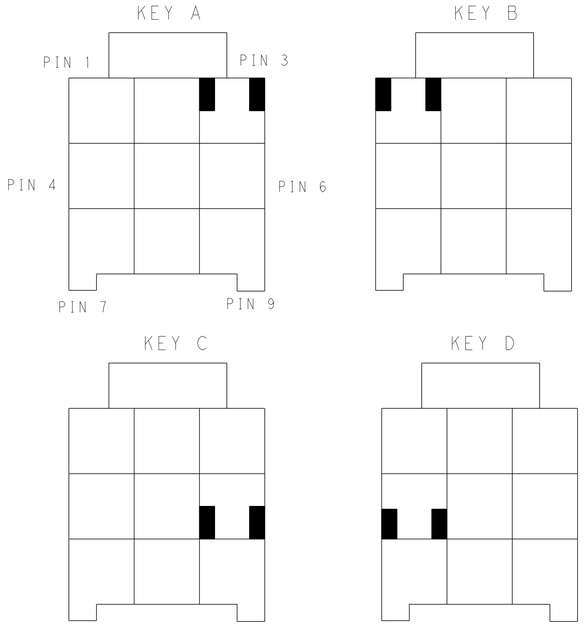

KEYING FOR 3*3 POS.

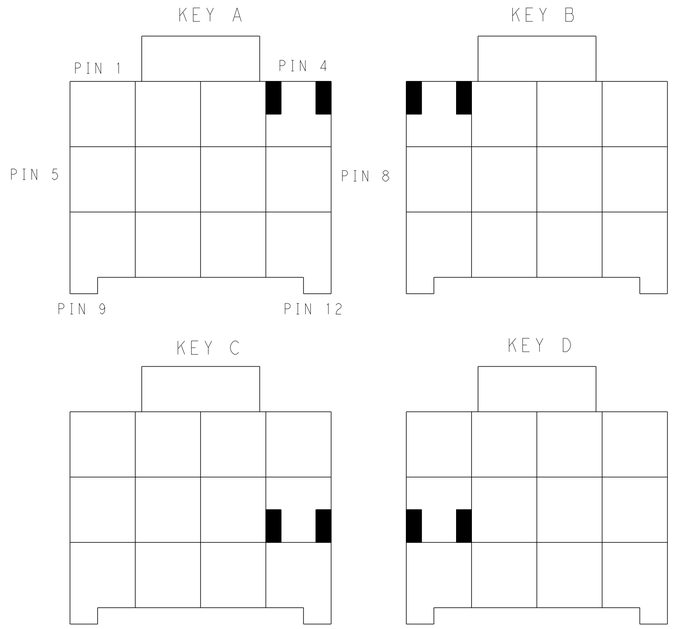

KEYING FOR 3*4 POS.

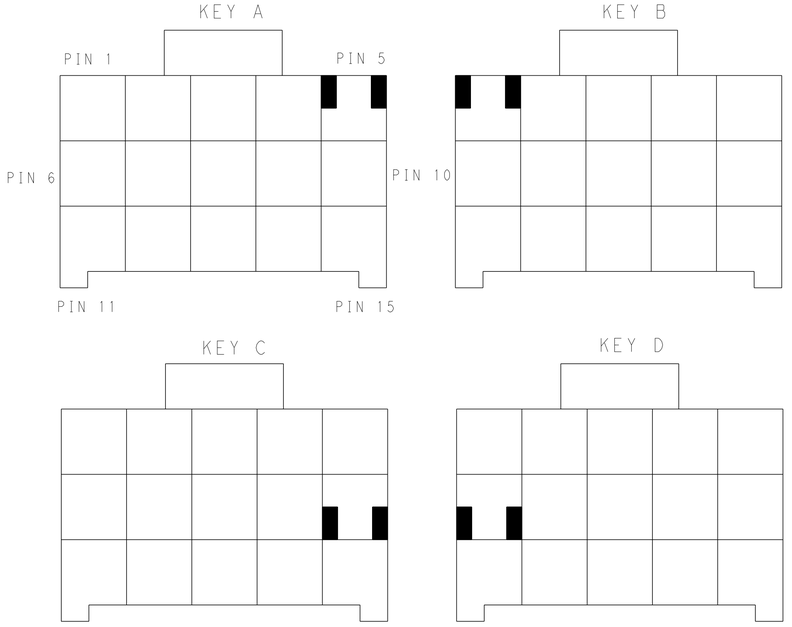

KEYING FOR 3*5 POS.

3*5	LEVEL 1	KEY A	1-1971875-7
		KEY B	2-1971875-7
		KEY C	3-1971875-7
		KEY D	4-1971875-7
	LEVEL 2 △6	KEY A	5-1971875-7
		KEY B	6-1971875-7
		KEY C	7-1971875-7
		KEY D	8-1971875-7
3*4	LEVEL 1	KEY A	1-1971875-4
		KEY B	2-1971875-4
		KEY C	3-1971875-4
		KEY D	4-1971875-4
	LEVEL 2 △6	KEY A	5-1971875-4
		KEY B	6-1971875-4
		KEY C	7-1971875-4
		KEY D	8-1971875-4
3*3	LEVEL 1	KEY A	1-1971875-3
		KEY B	2-1971875-3
		KEY C	3-1971875-3
		KEY D	4-1971875-3
	LEVEL 2 △6	KEY A	5-1971875-3
		KEY B	6-1971875-3
		KEY C	7-1971875-3
		KEY D	8-1971875-3
POS.	MATERIAL	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.35
2 PLC ±0.25
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL 1

FINISH - -

DWN TOMMY WU 06JUL2012
CHK HAPYE WU 06JUL2012
APVD YUHONG MAO 06JUL2012
PRODUCT SPEC 108-106118
APPLICATION SPEC 114-106118
WEIGHT -

TE Connectivity

NAME CAP HOUSING, PANEL MOUNT, TRIPLE ROW POWER TRIPLE LOCK

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1971875	-

Customer Drawing | SCALE - | SHEET 2 OF 2 | REV G