
© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G2	REV PER ECN-22-150900	28APR2022	RK	CSD

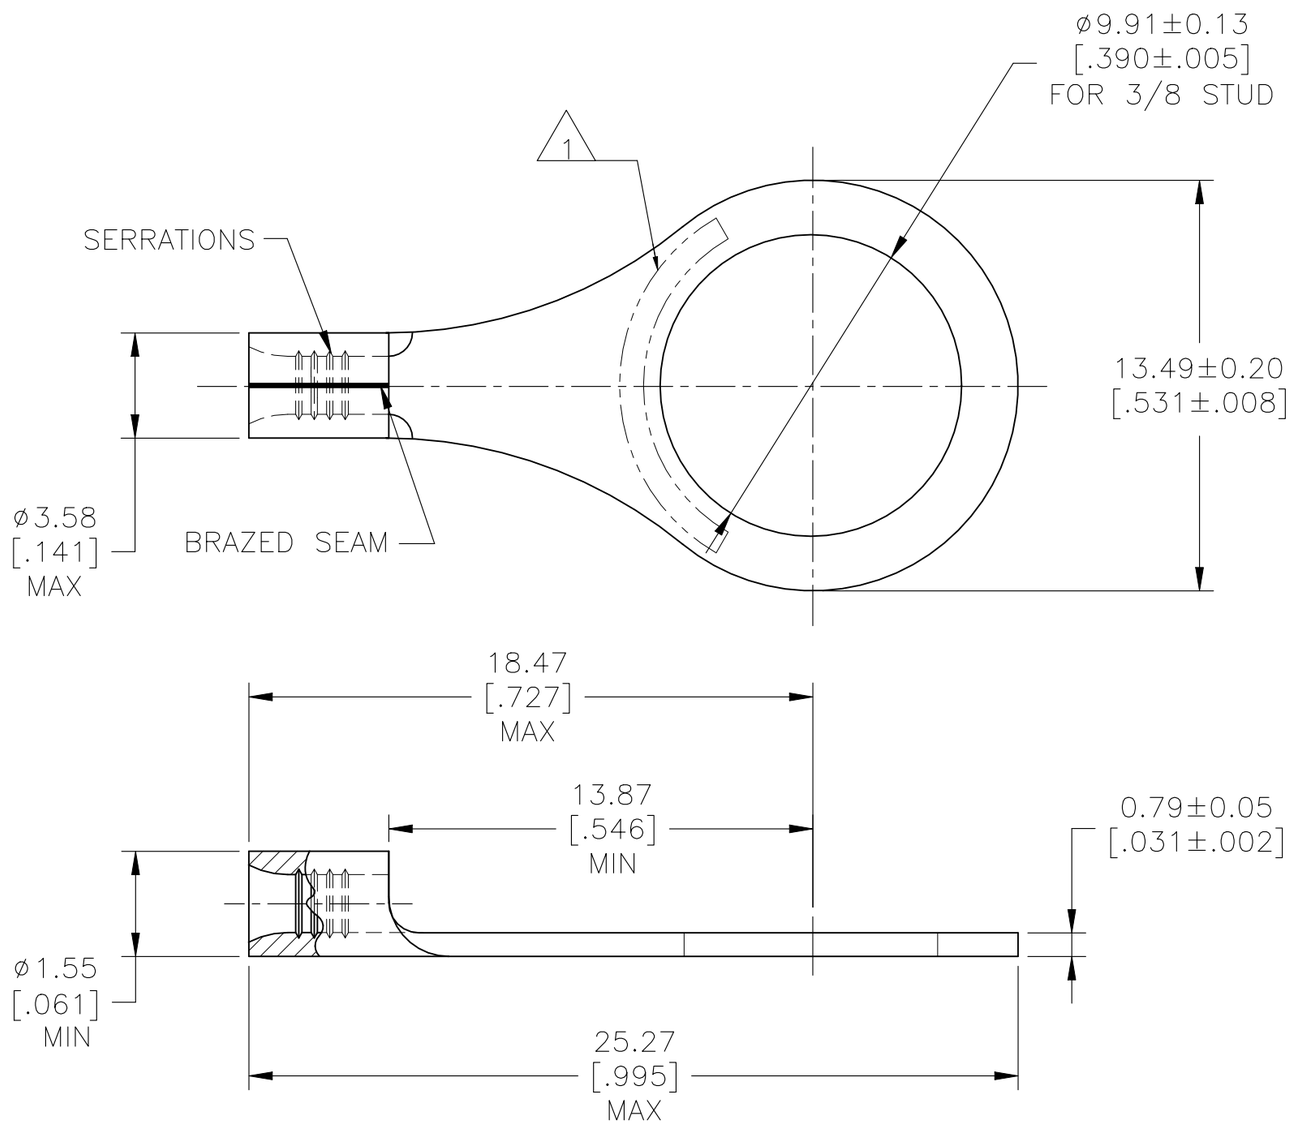

AMP WIRE RANGE	E13288 Listed
22–16 AWG SOLID OR STRANDED	22–16 AWG SOLID OR STRANDED

LR7189 Certified
22–16 AWG SOLID OR STRANDED

△1 STAMP AMP 22–18* APPROX AS SHOWN
22–16 TERMINALS ARE STAMPED 22–18 IN ACCORDANCE WITH MILITARY SPECIFICATION SAE AS7928 COMMERCIAL WIRE RANGE IS 22–16

△2 TIN PLATE 0.00254[.000100] MIN THK PER ASTM B–545

△3 NICKEL PLATE 0.00762[.000300] MIN THK PER SAE AMS QQ–N–290

△4 P/N 34115–1 IS NOT UL OR CSA APPROVED

FINISH	QTY.	PACKAGE TYPE	PART NUMBER
△3	1000	LOOSE PIECE	△4 34115–1
△2	100	LOOSE PIECE, BOX	8–34115–1
△2	5000	ON TAPE	2–34115–2
△2	1000	LOOSE PIECE	34115

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1–800–522–6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1–800–722–1111
FOR ORDER ENTRY	1–800–526–5142

MAX RECOMMENDED OPERATING TEMPERATURE: 170°C [338°F] MAX

VOLTAGE RATING: NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE, 0.26–1.65mm²[509–3,260] CIR MILS SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: COPPER PER ASTM B–152 ANNEALED

FINISH: SEE TABLE

DWN	TA BRINKMAN	3–10–93
CHK	DA PATTERSON	3–10–93
APVD	DE MILLER	3–10–93
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	—	

TE Connectivity

NAME: TERMINAL, RING TONGUE, SOLISTRAND 22–16 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–34115	—

CUSTOMER DRAWING | SCALE 8:1 | SHEET 1 OF 1 | REV G2