
Data sheet | Item number: 231-131

Operating tool; made of insulating material; 1-way; loose; white

https://www.wago.com/231-131



Color: white

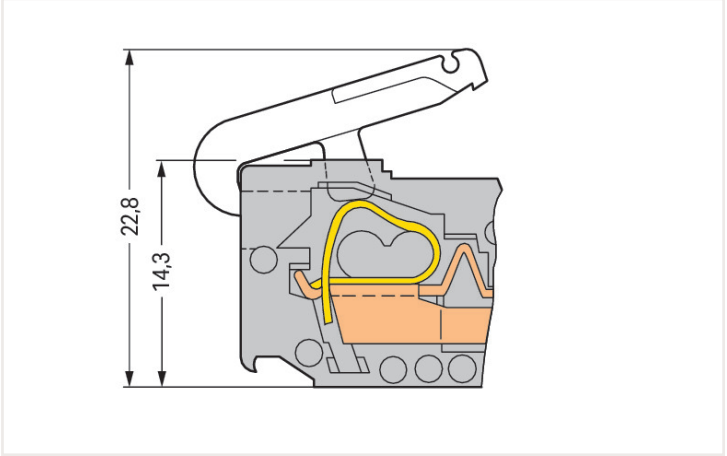

Dimensions in mm

Operating levers are not suitable for panel-mount, angled female connectors.

Technical data

Main product function	Operating tool
Number of spacings	1 -times

Physical data

Depth	20.2 mm / 0.79 inches
Pin spacing	5/7.62 mm

Mechanical Data

Suitable	for male and female connectors with CAGE CLAMP® connection

Material Data

Color	white
Material group	I
Insulation material	Glass fiber-reinforced polyamide (PA66 GF)
Flammability class per UL94	HB
Fire load	0.01 MJ
Weight	0.3 g

Commercial data

Product Group	3 (Multi Conn. System)
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-11-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	100 (25) pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332283168
Customs tariff number	82055980000

Continued on next page

Approvals and certificates

General approvals

Approval	Standard	Certificate name
CSA DEKRA Certification B.V.	C22.2	1466354

Approvals for marine applications

Approval	Standard	Certificate name
LR Lloyds Register	IEC 61984	96/20035 (E5)

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 231-131

CAD/CAE-Data

CAD data

2D/3D Models 231-131

CAE data

ZUKEN Portal 231-131

Installation notes

Inserting a conductor into CAGE CLAMP® unit via operating tool (231-291).