
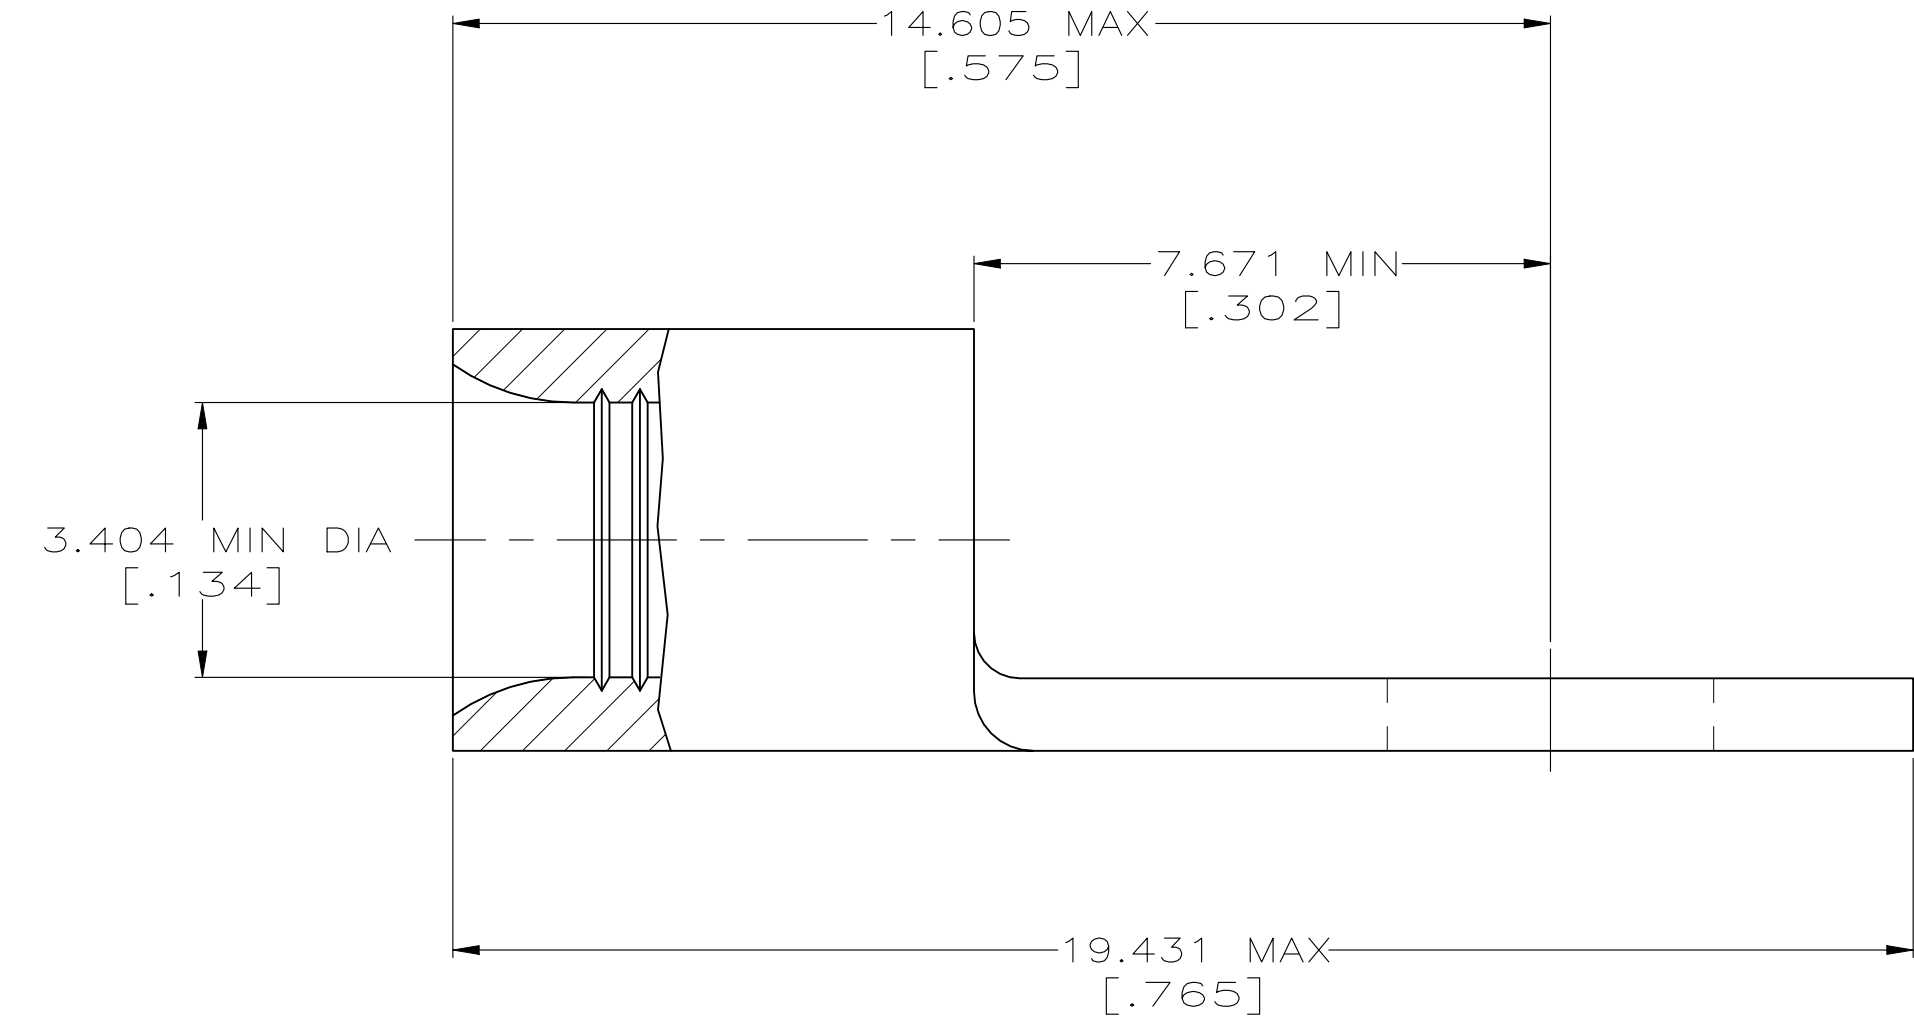


REVISIONS					
DAP			DATE	DWN	APVD
P	LTR	DESCRIPTION			
	H1	ECO-21-005853		18MAY2021	RK DR

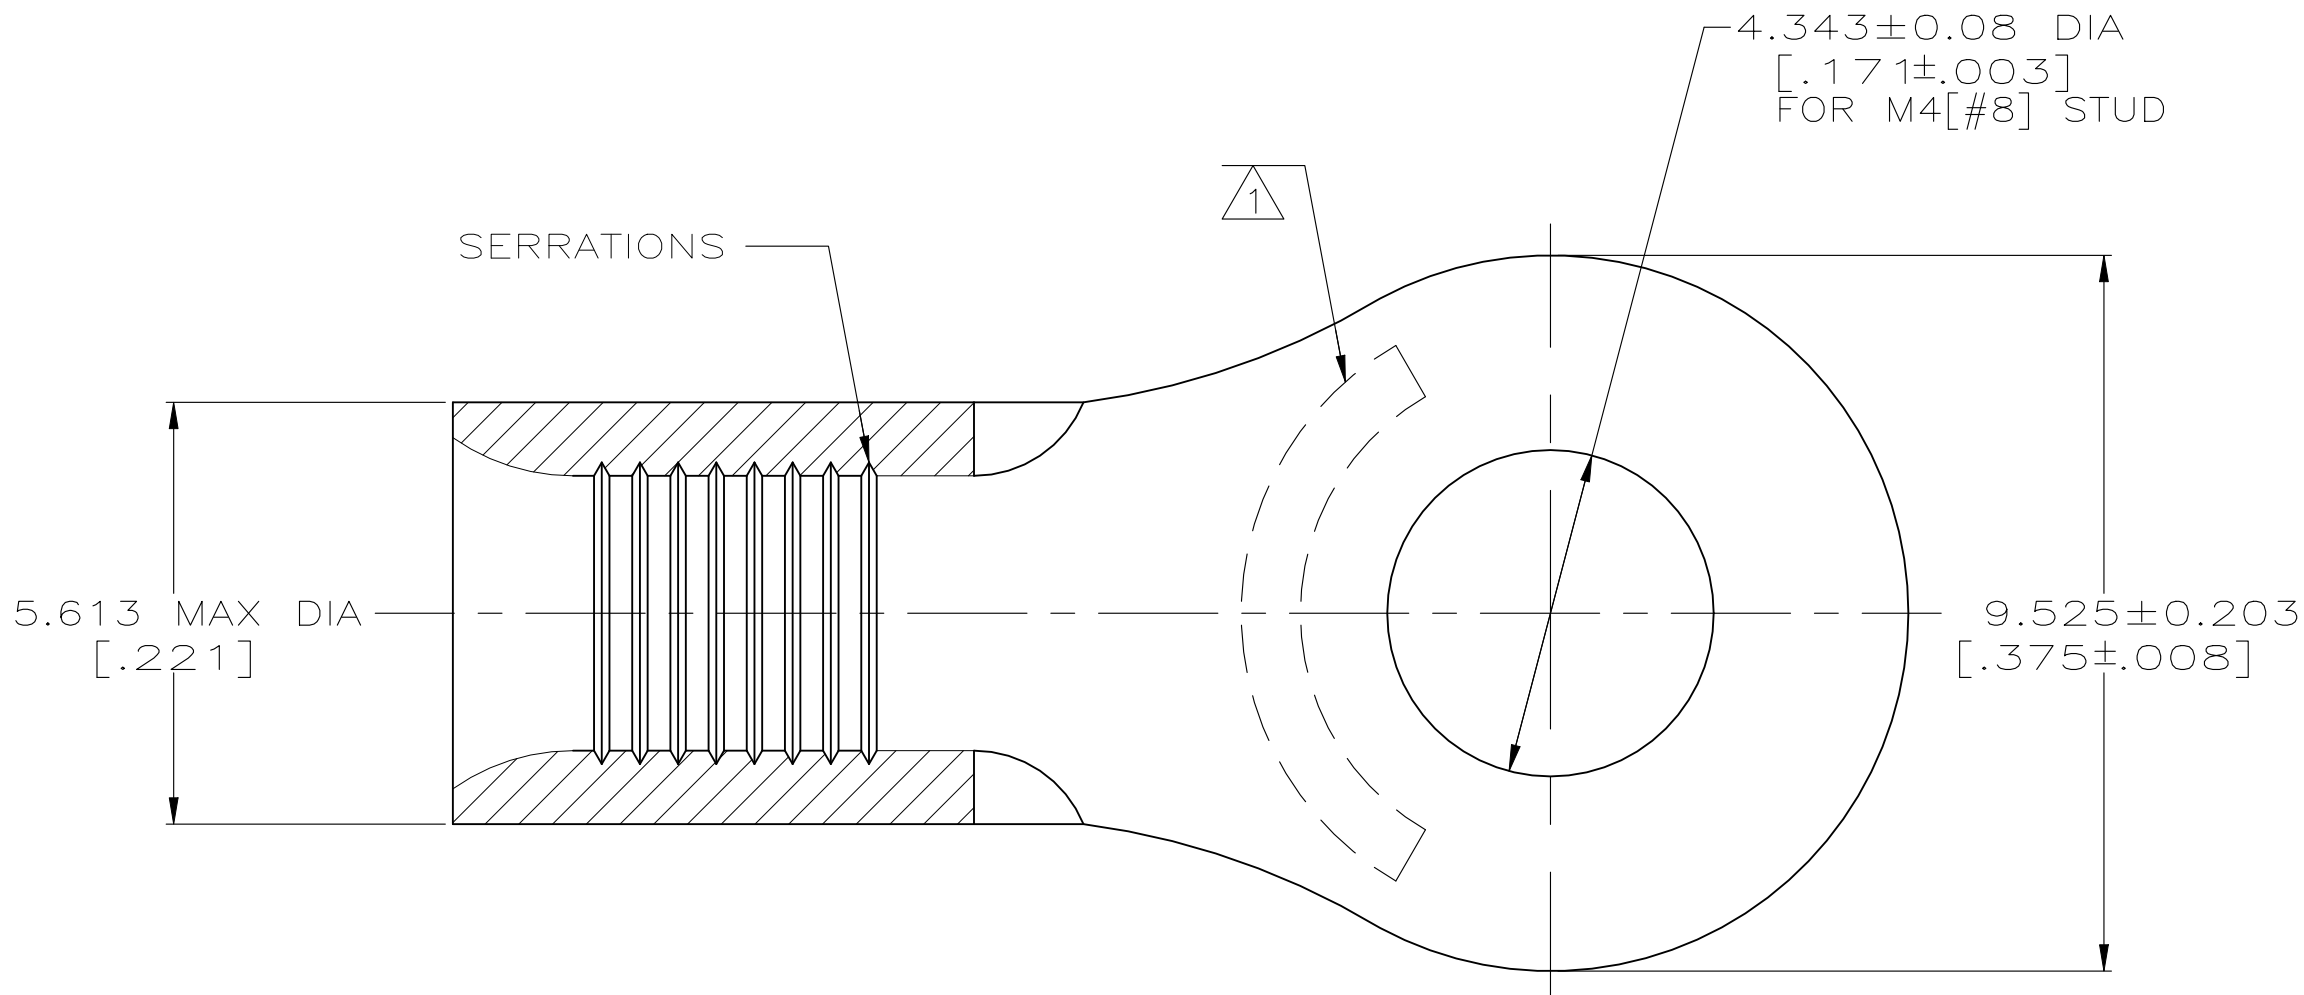

AMP WIRE RANGE	E13288 Listed
12-10 AWG STRANDED	12-10 AWG STRANDED

- 1 STAMP AMP 12-10* APPROX AS SHOWN
- 2 MATERIAL THICKNESS: 0.991±0.051 [.039±.002]
- 3 MATERIAL: COPPER PER ASTM B152
- 4 FINISH: TIN PLATE 0.00254 [.000100] MIN EXT THK PER ASTM B545

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170° C [338° F] MAX
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 2.62-6.64mm ² [5,180-13,100] CIR MILS STRANDED
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

2500	TAPE & REEL	3-31113-2
500	LOOSE PIECE	31113
QTY	PACKAGE TYPE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TA BRINKMAN 2-8-93	TE Connectivity			
DIMENSIONS: MM[INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK DA PATTERSON 2-8-93				
	0 PLC ± -	APVD -	NAME			
	1 PLC ± -	PRODUCT SPEC	TERMINAL, RING TONGUE, BUDGET, WIRE SIZE: 12-10 AWG			
	2 PLC ± -	UL 486A-B	-			
	3 PLC ± 0.127[.005]	APPLICATION SPEC	-			
	4 PLC ± -	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	ANGLES ± -	WEIGHT -	A2	00779	C-31113	-
MATERIAL 3	FINISH 4	CUSTOMER DRAWING		SCALE 10:1	SHEET 1 OF 1	REV H1