




PANEL CUTOUT

SWITCH FUNCTION	
POS. 1	POS. 2
	
OFF	ON
OPEN	1-1a

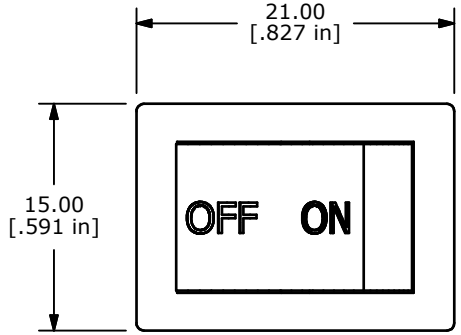


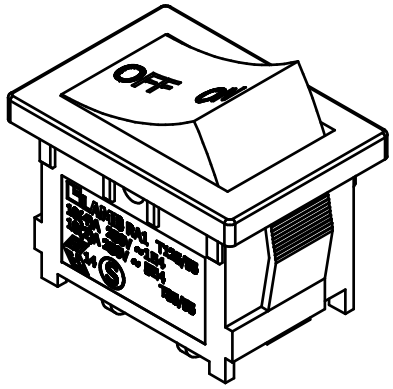

PANEL THICKNESS	(X) DIMENSION
0.75 - 1.25	19.2
1.25 - 2.00	19.4
2.00 - 3.00	19.6



CIRCUIT: SPST

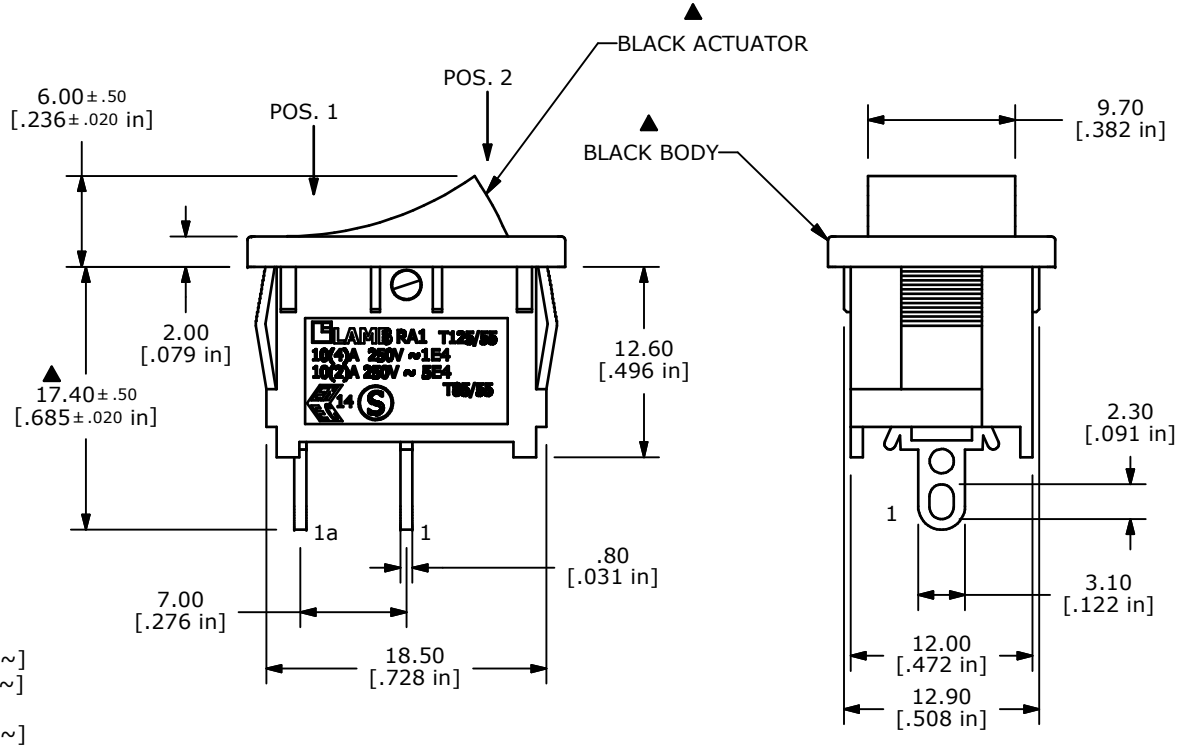

NOTE:
1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
   X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
▲5. CONTACT RATINGS: 10A 125VAC
   UL 1054 AND CAN/CSA C22.2 NO. 55 (E194579):
   10A @ 125VAC [UR, cUR]
   EN 61058-1:2002
   6(2)A 250V~ 1E4 T85 ENEC
6. CONTACT RESISTANCE: 35mΩ MAX. @ 50VAC
7. INSULATION RESISTANCE: 100MΩ MIN. @ 500VAC
8. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 6,000 CYCLES [UR, cUR]
   10,000 CYCLES [ENEC14, SEMKO: 10(4)a 250V~]
   50,000 CYCLES [ENEC14, SEMKO: 10(2)a 250v~]
10. OPERATING TEMPERATURE: -20°C TO 105°C [UR, cUR]
   -20°C TO 125°C [ENEC14, SEMKO: 10(4)a 250v~]
   -20°C TO 85°C [ENEC14, SEMKO: 10(2)a 250v~]
11. ▲DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
A	20567	INITIAL RELEASE	05/17/12	drg

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE RA12131123

DATE	DR	DWG	REV
5/16/2012	drg	38-RA12131123	A