




12		11		10		9		8		7		6		5		4		3		2		1		
PART NUMBER		CKT SIZE	MOUNTING OPTION		DIM "A"		DIM "B"		DIM "C"		DIM "D"		PACKAGING SPECIFICATION		COLOR		LEGEND 46993-***0 SERIES NUMBER CKT SIZE MATERIAL (SEE NOTE 14) 0 = 225NS 1 = 225S 2 = 250RS 3 = 250GS 4 = 250BS 5 = 250WS MOUNTING OPTION (SEE NOTE #7)							
	46993-0211	02	WITHOUT EARS		.21 / 5.4		--		NOT APPLICABLE		NOT APPLICABLE		PK-5559-002		BLACK									
	46993-0411	04	WITHOUT EARS		.38 / 9.6		.165 / 4.20		NOT APPLICABLE		NOT APPLICABLE													
	46993-0611	06	WITHOUT EARS		.54 / 13.8		.331 / 8.40		NOT APPLICABLE		NOT APPLICABLE													
	46993-0811	08	WITHOUT EARS		.71 / 18.0		.496 / 12.60		NOT APPLICABLE		NOT APPLICABLE													
	46993-1011	10	WITHOUT EARS		.87 / 22.2		.661 / 16.80		NOT APPLICABLE		NOT APPLICABLE													
	46993-1211	12	WITHOUT EARS		1.04 / 26.4		.827 / 21.00		NOT APPLICABLE		NOT APPLICABLE													
	46993-1411	14	WITHOUT EARS		1.21 / 30.6		.992 / 25.20		NOT APPLICABLE		NOT APPLICABLE													
	46993-1611	16	WITHOUT EARS		1.37 / 34.8		1.158 / 29.40		NOT APPLICABLE		NOT APPLICABLE													
	46993-1811	18	WITHOUT EARS		1.54 / 39.0		1.323 / 33.60		NOT APPLICABLE		NOT APPLICABLE		PK-5559-002		BLACK									
	46993-0210	02	WITH EARS		.21 / 5.4		--		.425 / 10.80		.228 / 5.80		PK-5559-001		BLACK									
	46993-0410	04	WITH EARS		.38 / 9.6		.165 / 4.20		.591 / 15.00		.394 / 10.00													
	46993-0610	06	WITH EARS		.54 / 13.8		.331 / 8.40		.756 / 19.20		.559 / 14.20													
	46993-0810	08	WITH EARS		.71 / 18.0		.496 / 12.60		.921 / 23.40		.724 / 18.40													
	46993-1010	10	WITH EARS		.87 / 22.2		.661 / 16.80		1.087 / 27.60		.890 / 22.60													
	46993-1210	12	WITH EARS		1.04 / 26.4		.827 / 21.00		1.252 / 31.80		1.055 / 26.80													
	46993-1410	14	WITH EARS		1.21 / 30.6		.992 / 25.20		1.417 / 36.00		1.224 / 31.10													
	46993-1610	16	WITH EARS		1.37 / 34.8		1.158 / 29.40		1.583 / 40.20		1.390 / 35.30													
	46993-1810	18	WITH EARS		1.54 / 39.0		1.323 / 33.60		1.748 / 44.40		1.555 / 39.50		PK-5559-001		BLACK									
	46993-0201	02	WITHOUT EARS		.21 / 5.4		--		NOT APPLICABLE		NOT APPLICABLE		PK-5559-002		BEIGE									
	46993-0401	04	WITHOUT EARS		.38 / 9.6		.165 / 4.20		NOT APPLICABLE		NOT APPLICABLE													
	46993-0601	06	WITHOUT EARS		.54 / 13.8		.331 / 8.40		NOT APPLICABLE		NOT APPLICABLE													
	46993-0801	08	WITHOUT EARS		.71 / 18.0		.496 / 12.60		NOT APPLICABLE		NOT APPLICABLE													
	46993-1001	10	WITHOUT EARS		.87 / 22.2		.661 / 16.80		NOT APPLICABLE		NOT APPLICABLE													
	46993-1201	12	WITHOUT EARS		1.04 / 26.4		.827 / 21.00		NOT APPLICABLE		NOT APPLICABLE													
	46993-1401	14	WITHOUT EARS		1.21 / 30.6		.992 / 25.20		NOT APPLICABLE		NOT APPLICABLE													
	46993-1601	16	WITHOUT EARS		1.37 / 34.8		1.158 / 29.40		NOT APPLICABLE		NOT APPLICABLE													
	46993-1801	18	WITHOUT EARS		1.54 / 39.0		1.323 / 33.60		NOT APPLICABLE		NOT APPLICABLE		PK-5559-002		BEIGE									
	46993-0200	02	WITH EARS		.21 / 5.4		--		.425 / 10.80		.228 / 5.80		PK-5559-001		BEIGE									
	46993-0400	04	WITH EARS		.38 / 9.6		.165 / 4.20		.591 / 15.00		.394 / 10.00													
	46993-0600	06	WITH EARS		.54 / 13.8		.331 / 8.40		.756 / 19.20		.559 / 14.20													
	46993-0800	08	WITH EARS		.71 / 18.0		.496 / 12.60		.921 / 23.40		.724 / 18.40													
	46993-1000	10	WITH EARS		.87 / 22.2		.661 / 16.80		1.087 / 27.60		.890 / 22.60													
	46993-1200	12	WITH EARS		1.04 / 26.4		.827 / 21.00		1.252 / 31.80		1.055 / 26.80													
	46993-1400	14	WITH EARS		1.21 / 30.6		.992 / 25.20		1.417 / 36.00		1.224 / 31.10													
	46993-1600	16	WITH EARS		1.37 / 34.8		1.158 / 29.40		1.583 / 40.20		1.390 / 35.30													
	46993-1800	18	WITH EARS		1.54 / 39.0		1.323 / 33.60		1.748 / 44.40		1.555 / 39.50		PK-5559-001		BEIGE									
REFERENCE FOR CIRCUIT NUMBER ORIENTATION (OPTIONAL EARS NOT SHOWN) 12 11 10 9 8 7 6 5 4 3 2 1 12CKTS. 14 13 12 11 10 9 8 7 6 5 4 3 2 1 14CKTS. 10 9 8 7 6 5 4 3 2 1 10CKTS. 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 16CKTS. 8 7 6 5 4 3 2 1 8CKTS. 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 18CKTS. 6 5 4 3 2 1 6CKTS. 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 20CKTS. 4 3 2 1 4CKTS. 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 22CKTS. 2 1 2CKTS. 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 24CKTS.																								
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION DIMENSION UNITS mm SCALE NTS GENERAL TOLERANCES (UNLESS SPECIFIED) MM INCH 4 PLACES ± ± 3 PLACES ± ± 2 PLACES ± 0.25 ± 1 PLACE ± 0.38 ± 0 PLACES ± ± ANGULAR TOL ± 0.5 ° EC NO: 689587 DRWN: HPAN18 CHK'D: XQZHANG APPR: XQZHANG INITIAL REVISION: DRWN: NNGUYEN APPR: FSMITH 2021/12/20 2021/12/21 2021/12/21 2013/04/11 2014/05/16 THIRD ANGLE PROJECTION DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS DRAWING C-SIZE SERIES 46993 DOCUMENT NUMBER SD-46993-0000 DOC TYPE PSD DOC PART 000 REVISION A9 MATERIAL NUMBER SEE TABLE CUSTOMER GENERAL MARKET SHEET NUMBER 2 OF 3																								
DOCUMENT STATUS		P1	RELEASE DATE		2021/12/21		03:47:11																	

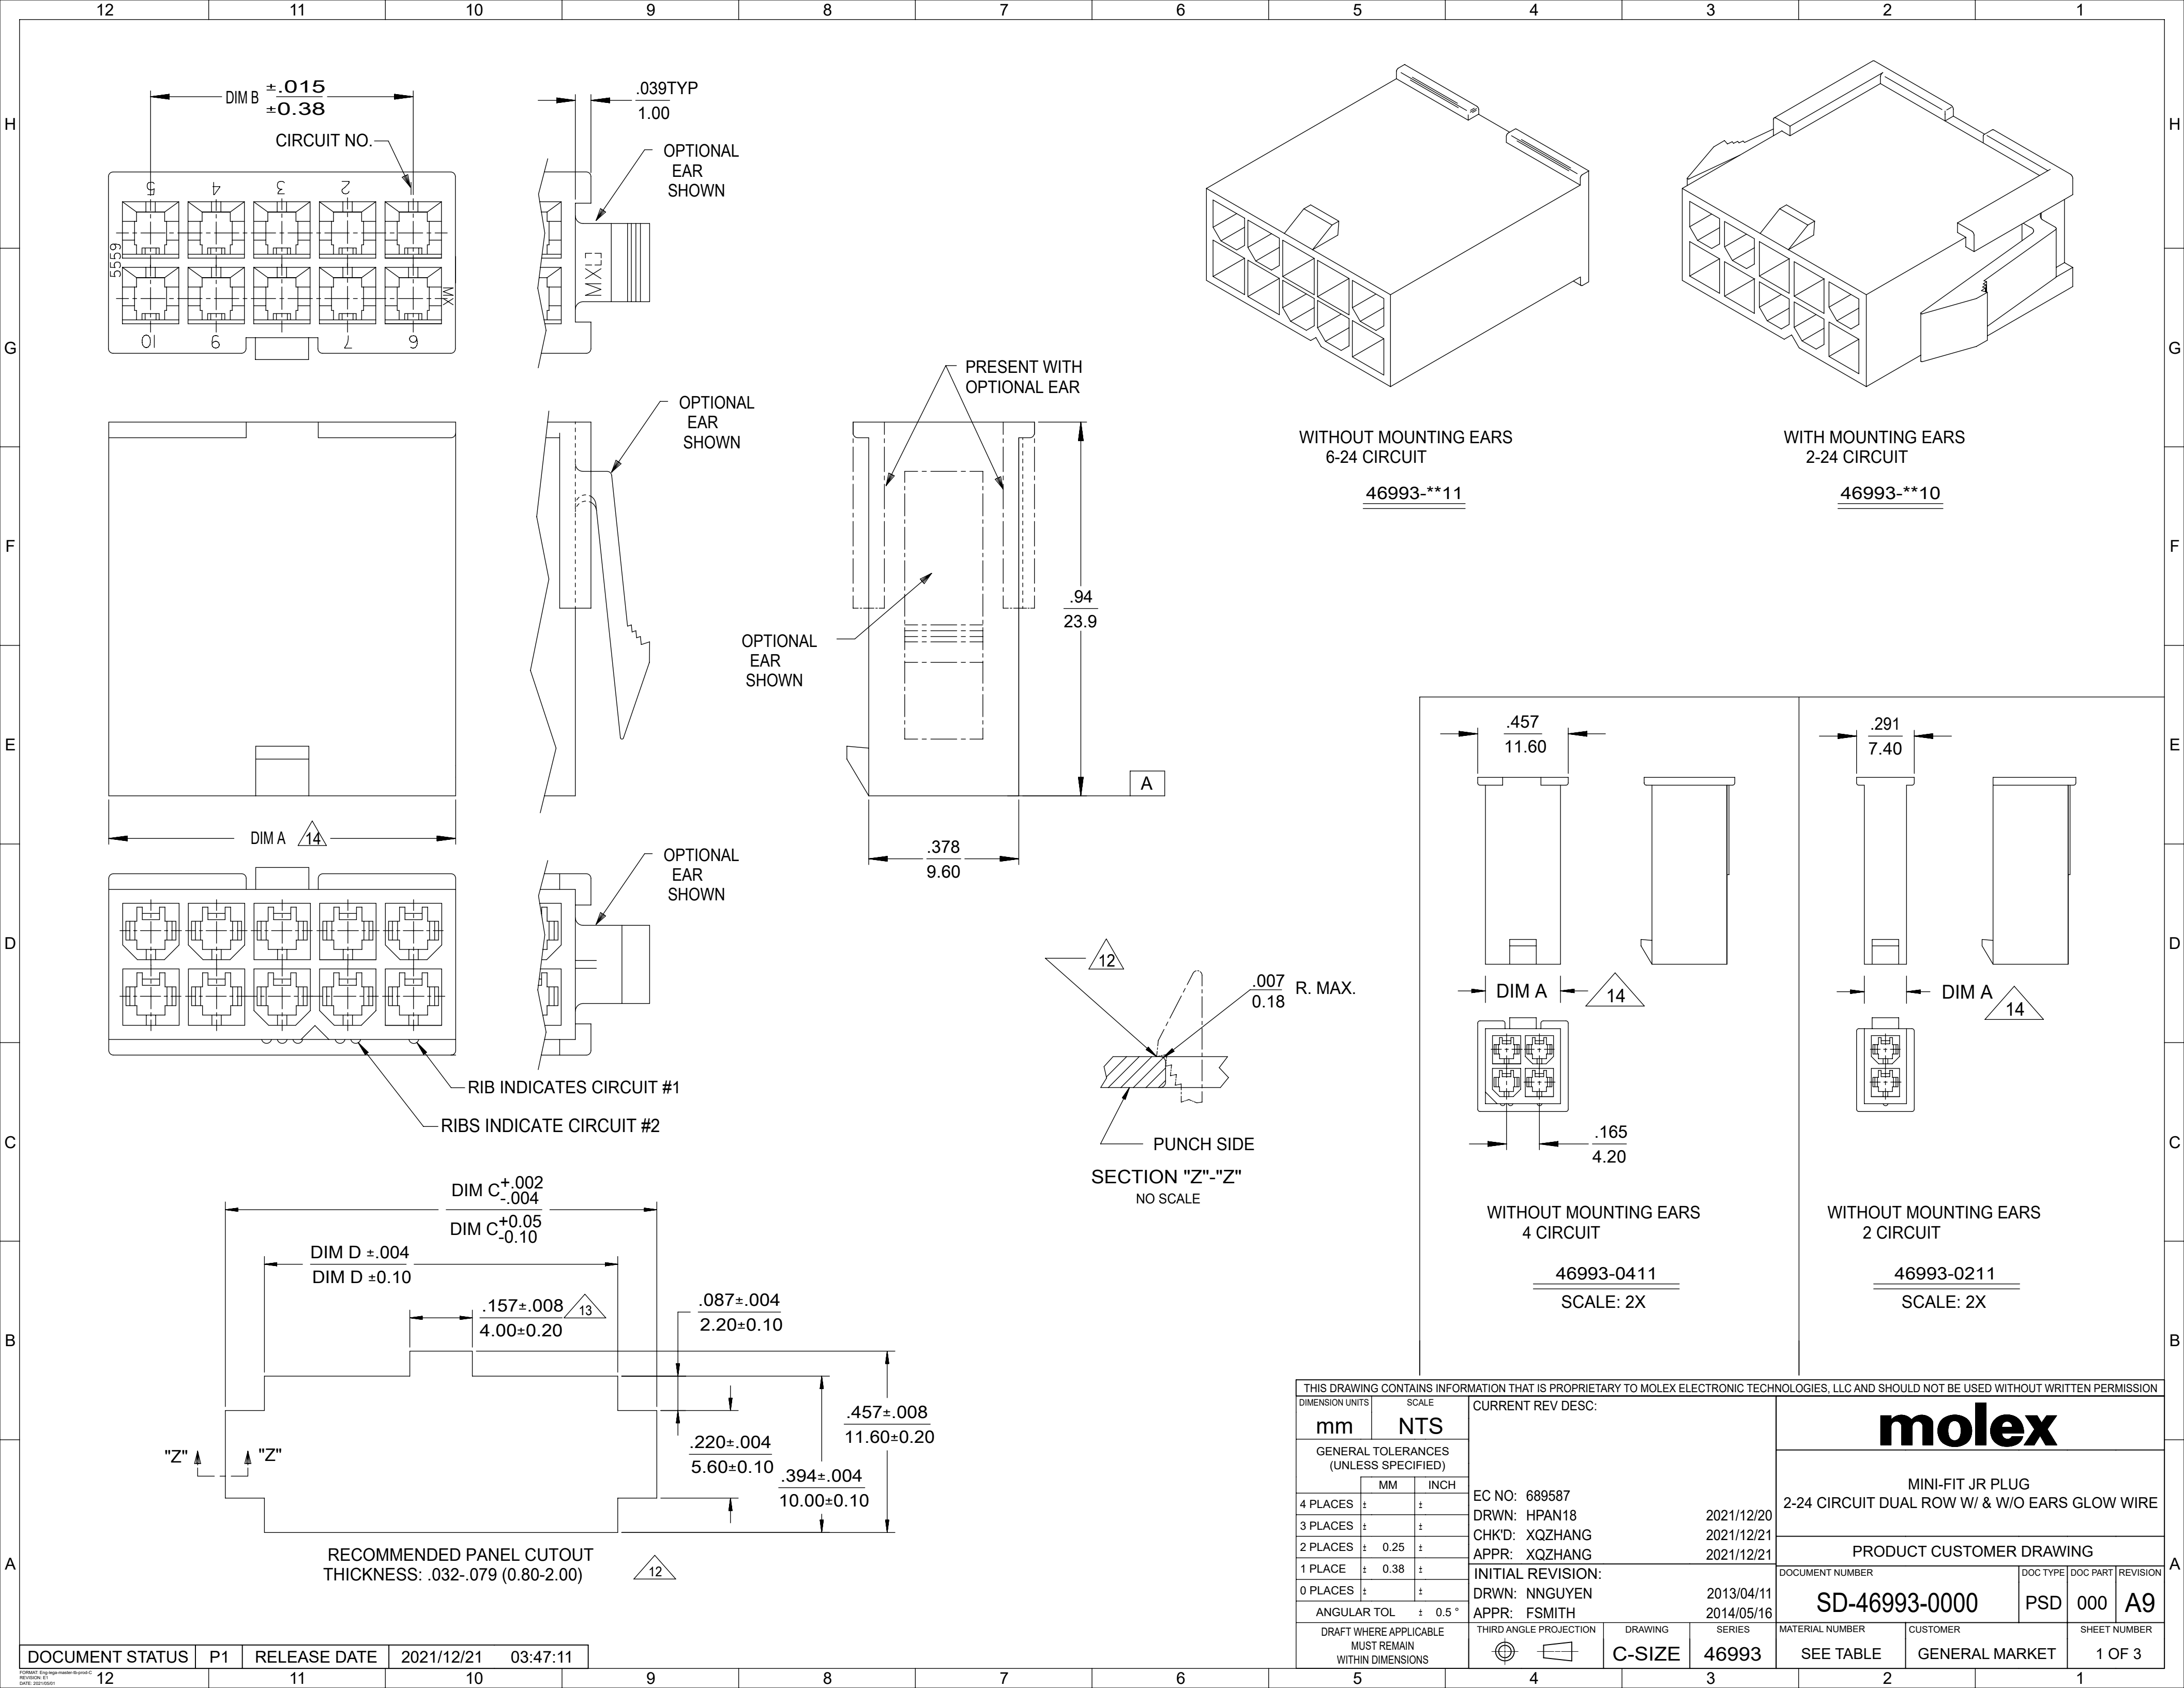