



Power contactor, AC-3 400 A, 200 kW / 400 V Coil AC 50/60 Hz and DC 200-277 V x (0.8-1.1) F-PLC input 24 V DC 3-pole size S12 Auxiliary contacts 2 NO + 2 NC Main circuit: Busbar Control and auxiliary circuit: screw terminal

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT1
General technical data	
size of contactor	S12
product extension	
• function module for communication	No
• auxiliary switch	Yes
power loss [W] for rated value of the current at AC in hot operating state	105 W
• per pole	35 W
power loss [W] for rated value of the current without load current share typical	3.6 W
surge voltage resistance	
• of main circuit rated value	8 kV
• of auxiliary circuit rated value	6 kV
maximum permissible voltage for safe isolation between coil and main contacts acc. to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	8,5g / 5 ms, 4,2g / 10 ms
• at DC	8,5g / 5 ms, 4,2g / 10 ms
shock resistance with sine pulse	
• at AC	13,4g / 5 ms, 6,5g / 10 ms
• at DC	13,4g / 5 ms, 6,5g / 10 ms
mechanical service life (switching cycles)	
• of contactor typical	10 000 000
• of the contactor with added electronically optimized auxiliary switch block typical	5 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
reference code acc. to IEC 81346-2	Q
Substance Prohibition (Date)	01.03.2017 00:00:00
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
• ambient temperature during operation	-25 ... +60 °C
• ambient temperature during storage	-55 ... +80 °C
Main circuit	
number of poles for main current circuit	3

number of NO contacts for main contacts	3
● operating voltage at AC-3 rated value maximum	1 000 V
operational current	
● at AC-1 at 400 V at ambient temperature 40 °C rated value	430 A
● at AC-1	
— up to 690 V at ambient temperature 40 °C rated value	430 A
— up to 690 V at ambient temperature 60 °C rated value	400 A
— up to 1000 V at ambient temperature 40 °C rated value	200 A
— up to 1000 V at ambient temperature 60 °C rated value	200 A
● at AC-3	
— at 400 V rated value	400 A
— at 500 V rated value	400 A
— at 690 V rated value	400 A
— at 1000 V rated value	180 A
● at AC-4 at 400 V rated value	350 A
● at AC-5a up to 690 V rated value	378 A
● at AC-5b up to 400 V rated value	332 A
● at AC-6a	
— up to 230 V for current peak value n=20 rated value	395 A
— up to 400 V for current peak value n=20 rated value	395 A
— up to 500 V for current peak value n=20 rated value	395 A
— up to 690 V for current peak value n=20 rated value	395 A
— up to 1000 V for current peak value n=20 rated value	180 A
● at AC-6a	
— up to 230 V for current peak value n=30 rated value	264 A
— up to 400 V for current peak value n=30 rated value	264 A
— up to 500 V for current peak value n=30 rated value	264 A
— up to 690 V for current peak value n=30 rated value	264 A
— up to 1000 V for current peak value n=30 rated value	180 A
minimum cross-section in main circuit at maximum AC-1 rated value	300 mm ²
operational current for approx. 200000 operating cycles at AC-4	
● at 400 V rated value	150 A
● at 690 V rated value	135 A
operational current	
● at 1 current path at DC-1	
— at 24 V rated value	400 A
— at 110 V rated value	33 A
— at 220 V rated value	3.8 A
— at 440 V rated value	0.9 A
— at 600 V rated value	0.6 A
● with 2 current paths in series at DC-1	
— at 24 V rated value	400 A
— at 110 V rated value	400 A
— at 220 V rated value	400 A
— at 440 V rated value	4 A

— at 600 V rated value • with 3 current paths in series at DC-1 — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value	2 A 400 A 400 A 400 A 11 A 5.2 A
operational current • at 1 current path at DC-3 at DC-5 — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 2 current paths in series at DC-3 at DC-5 — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 3 current paths in series at DC-3 at DC-5 — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value	400 A 3 A 0.6 A 0.18 A 0.125 A 400 A 400 A 2.5 A 0.65 A 0.37 A 400 A 400 A 400 A 1.4 A 0.75 A
operating power • at AC-2 at 400 V rated value • at AC-3 — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value — at 1000 V rated value	200 kW 132 kW 200 kW 250 kW 400 kW 250 kW
operating power for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value	85 kW 133 kW
operating apparent power at AC-6a • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 1000 V for current peak value n=20 rated value	150 000 kV·A 270 000 V·A 340 000 V·A 470 000 V·A 310 000 V·A
operating apparent power at AC-6a • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 1000 V for current peak value n=30 rated value	100 000 V·A 180 000 V·A 220 000 V·A 310 000 V·A 310 000 V·A
short-time withstand current in cold operating state up to 40 °C • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum	6 600 A; Use minimum cross-section acc. to AC-1 rated value 5 761 A; Use minimum cross-section acc. to AC-1 rated value 4 143 A; Use minimum cross-section acc. to AC-1 rated value 2 635 A; Use minimum cross-section acc. to AC-1 rated value 2 088 A; Use minimum cross-section acc. to AC-1 rated value

no-load switching frequency	
• at AC	500 1/h
• at DC	500 1/h
operating frequency	
• at AC-1 maximum	350 1/h
• at AC-2 maximum	200 1/h
• at AC-3 maximum	350 1/h
• at AC-4 maximum	130 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
• at 50 Hz rated value	200 ... 277 V
• at 60 Hz rated value	200 ... 277 V
control supply voltage at DC	
• rated value	200 ... 277 V
type of PLC-control input acc. to IEC 60947-1	Type 1
consumed current at PLC-control input acc. to IEC 60947-1 maximum	14 mA
voltage at PLC-control input rated value	24 V
operating range factor of the voltage at PLC-control input	0.8 ... 1.1
operating range factor control supply voltage rated value of magnet coil at DC	
• initial value	0.8
• full-scale value	1.1
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 ... 1.1
• at 60 Hz	0.8 ... 1.1
design of the surge suppressor	with varistor
apparent pick-up power of magnet coil at AC	
• at 50 Hz	750 V·A
inductive power factor with closing power of the coil	
• at 50 Hz	0.8
apparent holding power of magnet coil at AC	
• at 50 Hz	7 V·A
inductive power factor with the holding power of the coil	
• at 50 Hz	0.8
closing power of magnet coil at DC	800 W
holding power of magnet coil at DC	3.6 W
closing delay	
• at AC	60 ... 75 ms
• at DC	60 ... 75 ms
opening delay	
• at AC	115 ... 130 ms
• at DC	115 ... 130 ms
recovery time after power failure typical	2 s
arcing time	10 ... 15 ms
control version of the switch operating mechanism	Fail-safe PLC input (F-PLC-IN)
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	2
number of NO contacts for auxiliary contacts instantaneous contact	2
operational current at AC-12 maximum	10 A
operational current at AC-15	
• at 230 V rated value	6 A
• at 400 V rated value	3 A
• at 500 V rated value	2 A

• at 690 V rated value	1 A
operational current at DC-12	
• at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
operational current at DC-13	
• at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value • at 600 V rated value	361 A 382 A
yielded mechanical performance [hp]	
• for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value	125 hp 150 hp 300 hp 400 hp
contact rating of auxiliary contacts according to UL	A600 / P600
Short-circuit protection	
design of the fuse link	
• for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	gG: 630 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method	screw fixing
• side-by-side mounting	Yes
height	214 mm
width	160 mm
depth	225 mm
required spacing	
• with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — downwards • for live parts — forwards — upwards	20 mm 10 mm 10 mm 0 mm 20 mm 10 mm 10 mm 10 mm 20 mm 10 mm

— downwards	10 mm	
— at the side	10 mm	
Connections/ Terminals		
width of connection bar	25 mm	
thickness of connection bar	6 mm	
diameter of holes	11 mm	
number of holes	1	
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil	Connection bar screw-type terminals Screw-type terminals Screw-type terminals	
type of connectable conductor cross-sections • at AWG cables for main contacts	2/0 ... 500 kcmil	
connectable conductor cross-section for main contacts • stranded	70 ... 240 mm²	
connectable conductor cross-section for auxiliary contacts • solid or stranded • finely stranded with core end processing	0.5 ... 4 mm² 0.5 ... 2.5 mm²	
type of connectable conductor cross-sections • for auxiliary contacts — solid — solid or stranded — finely stranded with core end processing • at AWG cables for auxiliary contacts	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²) 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²) 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)	
• AWG number as coded connectable conductor cross section for auxiliary contacts	2x (20 ... 16), 2x (18 ... 14), 1x 12 18 ... 14	
Safety related data		
safety device type acc. to IEC 61508-2	Type B	
B10 value with high demand rate acc. to SN 31920	1 000 000	
Safety Integrity Level (SIL) acc. to IEC 61508	2	
SIL Claim Limit (subsystem) acc. to EN 62061	2	
performance level (PL) acc. to EN ISO 13849-1	c	
category acc. to EN ISO 13849-1	2	
stop category acc. to DIN EN 60204-1	0	
product function • mirror contact acc. to IEC 60947-4-1 • positively driven operation acc. to IEC 60947-5-1	Yes No	
PFHD with high demand rate acc. to EN 62061	0.00000045 1/h	
PFDavg with low demand rate acc. to IEC 61508	0.007	
MTBF	75 y	
hardware fault tolerance acc. to IEC 61508	0	
T1 value for proof test interval or service life acc. to IEC 61508	20 y	
protection class IP on the front acc. to IEC 60529	IP00; IP20 with box terminal/cover	
touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front with box terminal/cover	
suitability for use safety-related switching OFF	Yes	
Certificates/ approvals		
General Product Approval	EMC	Functional Safety/Safety of Machinery



[Type Examination Certificate](#)

Declaration of Conformity	Test Certificates	other
---------------------------	-------------------	-------

[Miscellaneous](#)



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

[Confirmation](#)

[Miscellaneous](#)

other	Railway
-------	---------

[Miscellaneous](#)

[Special Test Certificate](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1075-6SP36>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1075-6SP36>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1075-6SP36>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1075-6SP36&lang=en


Characteristic: Tripping characteristics, I_t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1075-6SP36/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1075-6SP36&objecttype=14&gridview=view1>

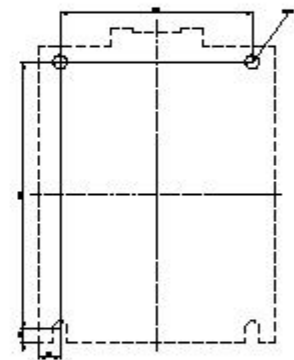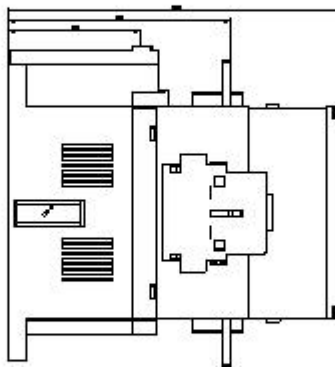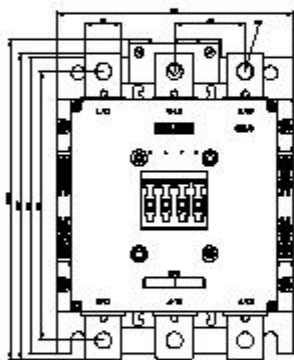

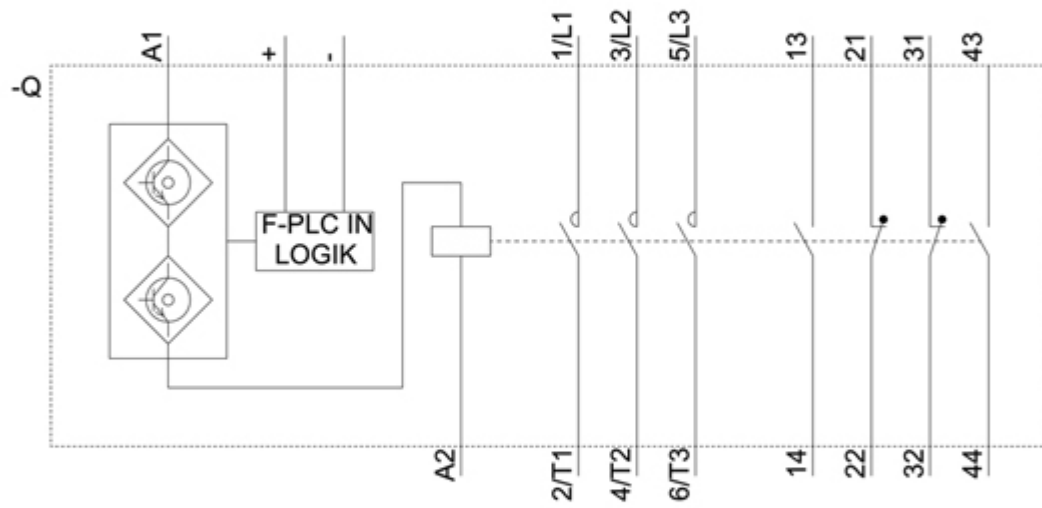

last modified:

1/12/2021 [🔗](#)