

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST
AF	50

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	REVISED PER ECR-22-152700	29SEP2022	SM	FL

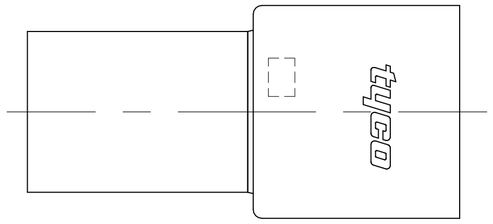

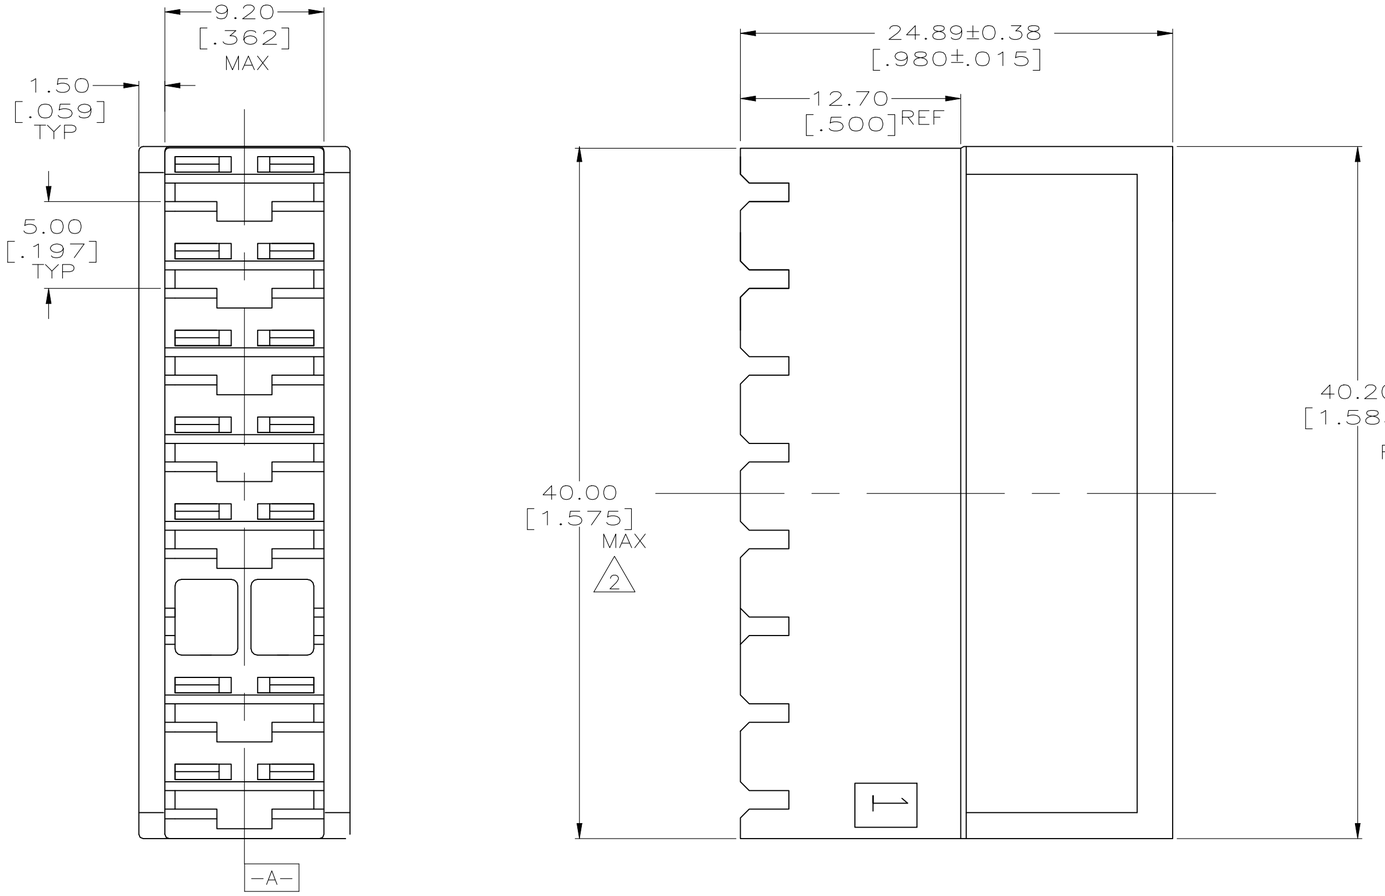

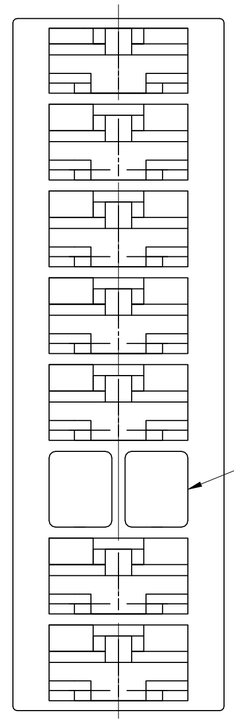

BLOCKED CIRCUIT POSITION
SEE TABLE BELOW

1 ACCEPTS RECEPTACLE CONTACTS AND WIRE RANGES:

PART NUMBER	WIRE RANGE
1217378	22 – 18 AWG
1217094	18 – 14 AWG OR A COMBINATION OF (TWO #18'S)
1217095	16 – 12 AWG OR A COMBINATION OF (TWO #18'S OR TWO #16'S OR AN #18 AND #16).

2 HOUSING WIDTH MEASURED ACROSS CIRCUITS AT CENTERLINE DATUM [–A–].

3 PRELIMINARY – NOT FOR PRODUCTION

BLOCKED POSITION #	COLOR	KEYING FEATURE	POLARIZATION FEATURE	PART NUMBER
5 & 6	BLUE	NONE	NONE	3 521796-5
6 & 7	BLUE	NONE	NONE	3 521796-4
3	BLUE	NONE	NONE	3 521796-3
2 & 3	BLUE	NONE	NONE	3 521796-2
NONE	BLUE	NONE	NONE	521796-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.25 [.010]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: NYLON
FINISH: SEE TABLE

DWN	R FLAIG	21FEB2005
CHK	R LANDON	21FEB2005
APVD	R LANDON	21FEB2005
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT		

TE Connectivity

NAME: HOUSING, RECEPT, POSITIVE-LOCK, MKIII, 6.35 [.250] SERIES, 8 POSITION
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-521796	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV B1

521796

1471-9 (3/11)