



Number of contacts

24+

10 A 250 V 4 kV 3

Han
HMC

Han DD[®] HMC,
Crimp termination



Please order crimp contacts
separately.

Conductor
cross-section
(mm²)


0.14 ... 2.5

Part number
Male Female


09 16 224 3001

09 16 224 3101


Drawing
(dimensions in mm)

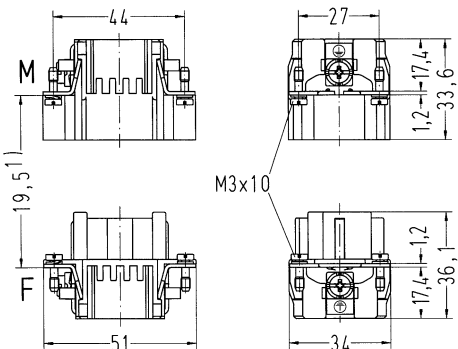

1) distance for contact max. 21 mm



Contact arrangement (view from termination
side)



Panel cut out
for use without Hoods/Housings