


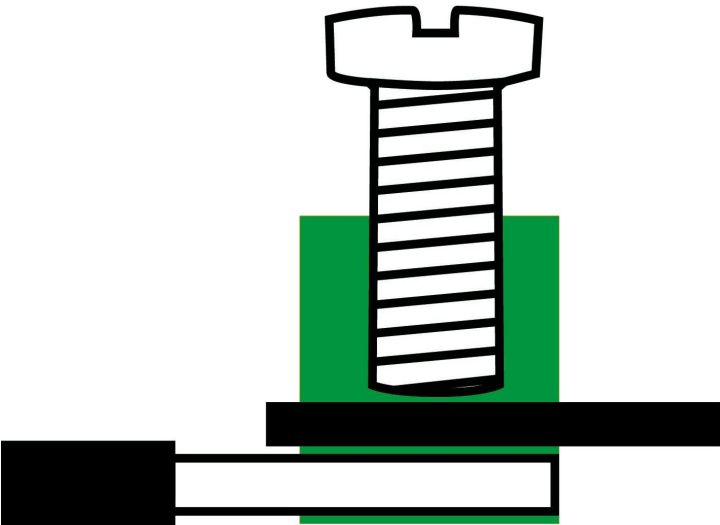

### Business data

|                                            |                              |
|--------------------------------------------|------------------------------|
| Article number                             | 7964.2                       |
| Article name                               | AO-D 2 AD-ZS (o. 3 Schalter) |
| GTIN (EAN)                                 | 4044211078379                |
| Packaging unit                             | 1                            |
| Quantity unit                              | PC                           |
| Weight per piece (not including packaging) | 92 g                         |
| Weight per piece (including packaging)     | 131 g                        |
| Unit of weight                             | G                            |
| Customs number                             | 85364900                     |
| Country of origin                          | EEC                          |
| Product description                        | Analogue output module       |

## 7964.2 AO-D 2 AD-ZS (o. 3 Schalter)

### Technical data

#### Dimensions

|                            |       |
|----------------------------|-------|
| Length                     | 53 mm |
| Width                      | 87 mm |
| Height TS 35 / 7.5 with BA | 63 mm |

#### Ratings

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Contamination degree | 2   |

#### Connection data

|                                                          |                      |
|----------------------------------------------------------|----------------------|
| Connection principle                                     | Screw connection     |
| Wire cross-section single core (rigid), min.             | 0.08 mm <sup>2</sup> |
| Wire cross-section single-core (rigid), max.             | 4 mm <sup>2</sup>    |
| Wire cross-section stranded, min.                        | 0.2 mm <sup>2</sup>  |
| Wire cross-section stranded, max.                        | 2.5 mm <sup>2</sup>  |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm <sup>2</sup>  |
| Wire cross-section stranded with wire-end ferrules, max. | 2.5 mm <sup>2</sup>  |
| Stripping length                                         | 7 mm                 |
| Torque                                                   | 0.6 Nm               |

#### Input data

|                    |   |
|--------------------|---|
| Number of channels | 2 |
|--------------------|---|

#### Materials

|                           |        |
|---------------------------|--------|
| Working temperature, min. | -20 °C |
| Working temperature, max. | 50 °C  |

#### Further technical data

|                                 |   |
|---------------------------------|---|
| Manual/Off/Automatic switching  | ✓ |
| Feedback loop                   | ✓ |
| Operating voltage indicator LED | ✓ |

---

### Media

---

---

### Accessories

---